

## Description

The E-T-A Solid State Remote Power Controller (SSRPC) E-1048-60. is an opto decoupled transistorised switching device providing both protection and signalisation. It may be used wherever safe switching and protection of resistive, inductive or lamp loads in DC voltage systems is required.

## Typical applications

### Automation

- interface module providing inexpensive power amplification at PLC outputs
- optimum protection of individual loads by monitoring the load circuit

### Protection and control of

- motors
- solenoids
- lamps

## Features

- Optimum load protection. Available in current ratings of 0.5 A; 1 A; 2 A; 4 A. No derating required over entire temperature range!
- Fast short-circuit limitation and disconnection
- Time/current dependent overload disconnection (simulating thermal-magnetic CBE trip curve)
- Remote control
- Fault indication: LED and signal output for overload/short-circuit signalisation, and wire break indication in the OFF condition (version -600) and in the OFF and ON condition (version -602)
- Physically isolated fault indication.
- Compact plug-in type

## Ordering information

Type No.	Description
<b>E-1048</b>	Solid State Remote Power Controller
<b>Version</b>	
<b>600</b>	wire break indication in OFF condition (standard)
<b>602</b>	with permanent wire break monitoring
<b>Voltage rating</b>	
<b>DC 24 V</b>	DC 24 V (standard)
<b>Current ratings</b>	
<b>0.5 A</b>	
<b>1.0 A</b>	
<b>2.0 A</b>	
<b>4.0 A</b>	
<b>E-1048 - 600 DC24 V 1.0 A</b>	ordering example

Where remote control, wire break and LED indication is not required, please contact us for a thermal-magnetic circuit breaker (e.g. types 2210, 3600, 3900).



## Technical data (T<sub>ambient</sub> = 25 °C; at U<sub>N</sub>)

### Load circuit

Voltage rating U<sub>B</sub> DC 24 V (18...36 V)  
 Current rating I<sub>N</sub> 0.5 A; 1 A; 2 A; 4 A (other ratings to special order)

Closed-circuit current I<sub>S</sub> typically 0.3 mA

### Min. load current

Standard version: I<sub>load</sub> > 1 mA

wire break indication in OFF condition

Option: wire break indication in OFF and ON condition

wire break ind. in OFF cond. R<sub>load</sub> > typ. 500 kΩ

wire break ind. in ON cond. I<sub>load</sub> < typ. 130 mA (0.5/1 A unit)

I<sub>load</sub> < typ. 500 mA (2/4 A unit)

Voltage drop U<sub>DSmax</sub>

0.15 V; 0.3 V; 0.1 V; 0.2 V

Switch-on/switch-off time t<sub>on</sub>/t<sub>off</sub>

typ. 300 μs/700 μs with resistive load

### Overload disconnection

approx. 1.5 (±0.3) × I<sub>N</sub> after approx.

100 ms Short-circuit current (self-limiting)

max. 25 A (with 0.5 A and 1 A current ratings)

max. 75 A (with 2 A and 4 A current ratings)

### Short-circuit disconnection

< 250 μs

### Control circuit

Voltage rating DC 24 V

Voltage controlled input U<sub>E</sub> DC 0 V < low level < 5 V

DC 8.5 V < high level < 36 V

Input current I<sub>E</sub>

1...10 mA (8.5...36 V)

Max. switching frequency f<sub>max</sub>

500 Hz

Reset time after short-

circuit/overload disconnection 1 ms

### Fault indication output F (opto coupler)

Voltage rating range DC 5...36 V

Voltage rating range DC 5...36 V

Max. load current

100 mA (ΔU < 2 V), with reverse polarity protection

Error indication

output F+ / F- conductive

- wire break in load circuit

- after short-circuit/overload disconnection

disconnection

### General data

Temperature range

0 °C...+60 °C

Insulation voltage

2.5 kV<sub>rms</sub>

(IEC 664/VDE 0110)

Mass

28 g

## Technical description

At the appropriate input level (>8.5 V), the opto decoupled input in the SSRPC will switch on a power transistor to connect the load to the plus pole of the load circuit supply ( $U_B$ ).

The transistor will switch off when

- the control voltage ( $U_E$ ) is removed
- there is a short-circuit/overload in the load circuit.

Status indication is provided by two LEDs (red and green).

Thermal-magnetic style overload protection occurs at approx. 1.5 times rated current. See time/current characteristic curves.

The SSRPC is fitted with blade terminals DIN 46244-A6.3-0.8 and is suitable for plug-in mounting with various E-T-A sockets (see Accessories).

### Control circuit

#### ON condition:

If a voltage higher than 8.5 V is applied to the input terminals (-IN, +IN), the control current (from the PLC) will flow through the opto coupler. The output transistor will be conductive, the green LED will be lighted.

#### OFF condition:

A control voltage lower than 5 V will switch the output transistor off.

### Load circuit

The load circuit switches depending on the control signal ("0" or "1"). It is electronically monitored for faults. In the event of a short-circuit the circuit is disconnected after max. 250  $\mu$ s whilst upon inadmissible overload it is disconnected according to the time/current curves shown.

### Fault indication output

The fault indication circuit (F+, F-) is opto decoupled from the load and control circuit.

In the OFF condition, this circuit will provide wire break indication, with the transistor output being open.


In the ON condition, the circuit will provide short-circuit and overload monitoring and indication.

Visual fault indication by red LED.

## Status indication


Status indication	Fault indication output (opto coupler)	LED	
		green	red
non-conductive, no duty		<input type="radio"/>	<input type="radio"/>
conductive, normal duty		<input checked="" type="radio"/>	<input type="radio"/>
overload or short circuit at the output (and with option wire break indication in ON condition)		<input checked="" type="radio"/>	<input checked="" type="radio"/>
wire break, in the OFF position		<input type="radio"/>	<input checked="" type="radio"/>

## Dimensions

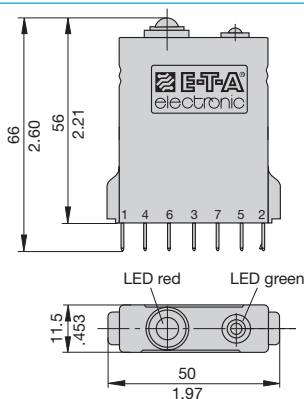


This is a metric design and millimeter dimensions take precedence ( $\frac{mm}{inch}$ )

## Connection diagram

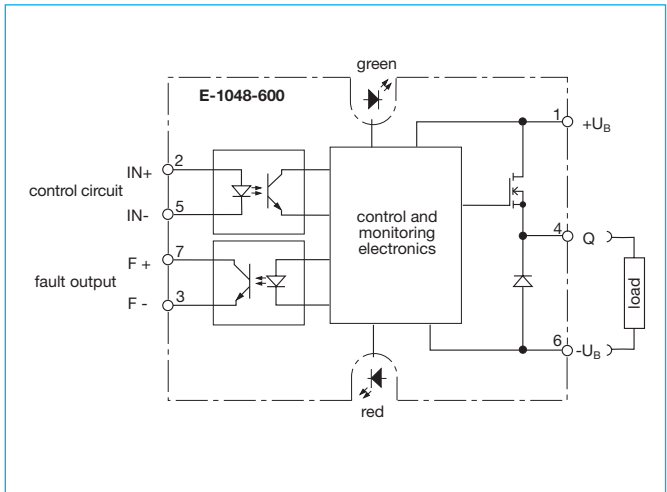


## Typical time/current characteristics ( $T_A = 25^\circ C$ )

### 0.5 A and 1 A


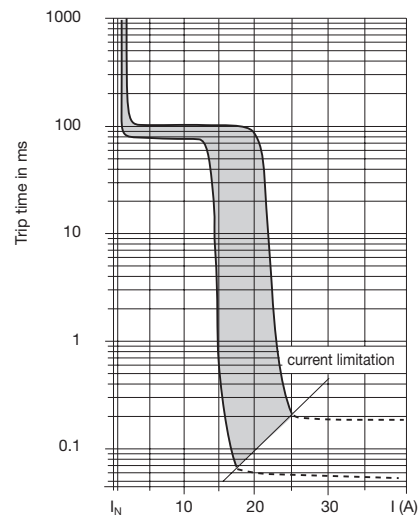


### 2 A and 4 A

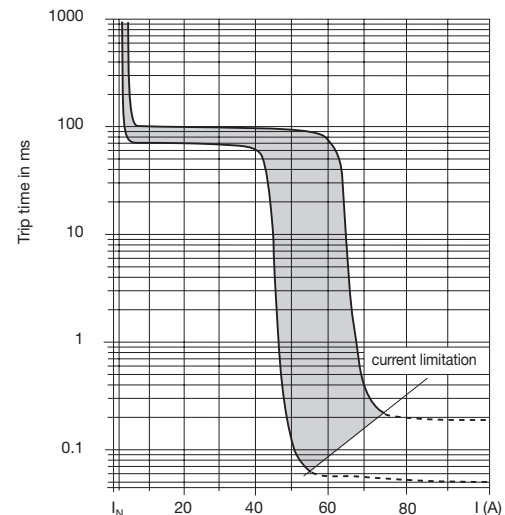


## Functional diagrams E-1048-60.


### Functional diagram E-1048-60. wire break indication

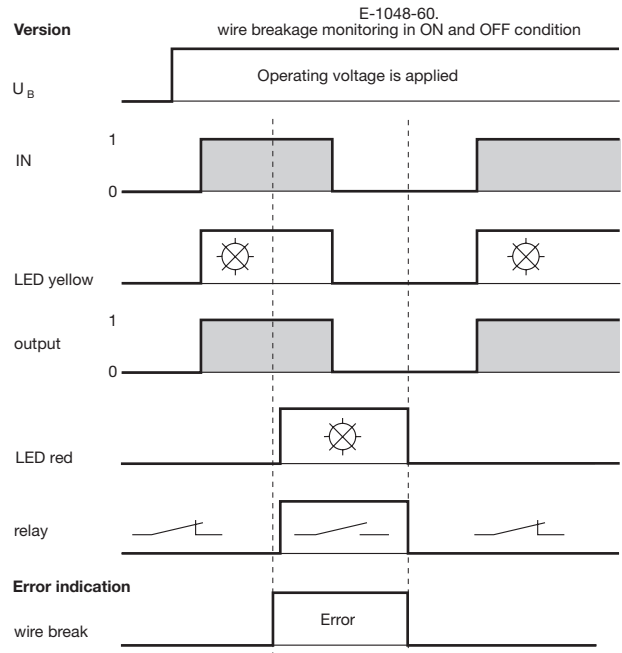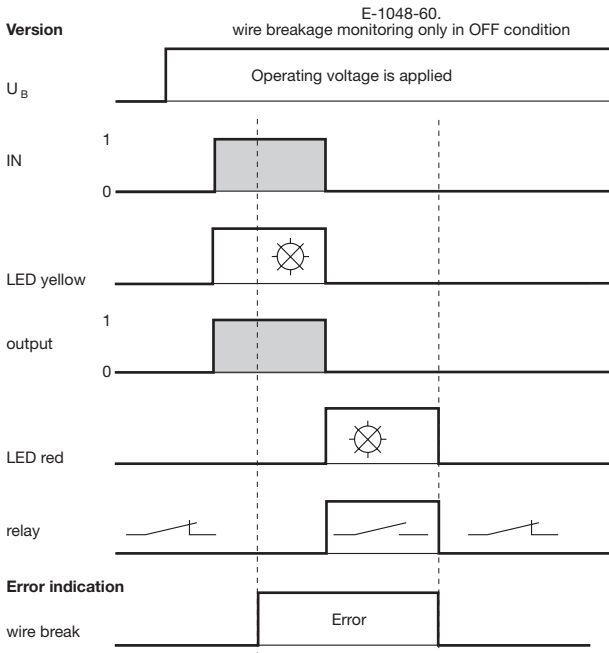

### Functional diagram E-1048-60. overload /short-circuit indication

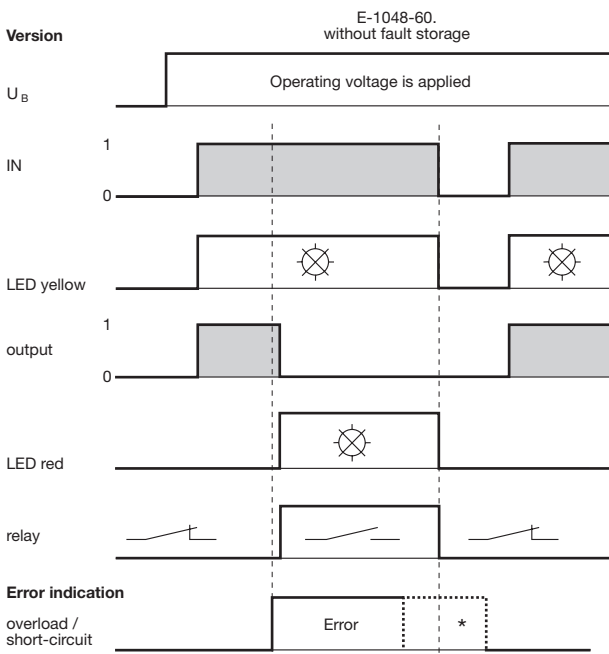

\* Fault indication is reset when control voltage is switched off, whether the failure is still active or not.



**Accessories for E 1048-60.**

**Single mounting sockets**

(up to 16 A max. load)

**17-P10-Si**

**17-P70-Si**


(retaining clip Y 300 581 11 available on request)

(with adapter)

**17-P10-Si-20025**

**17-P70-Si-20025**

(retaining clip on request)

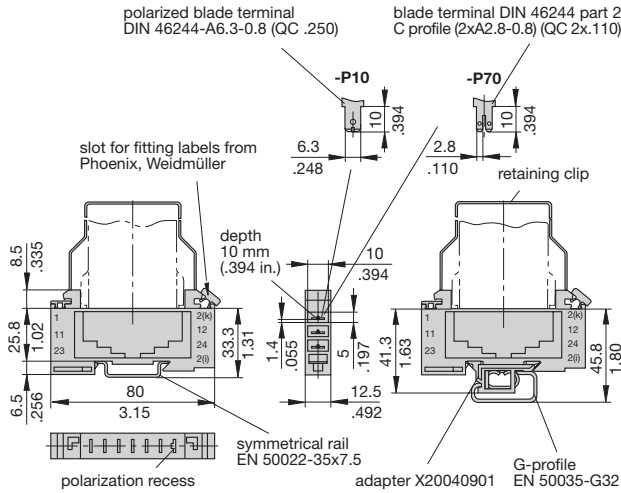


**Bus bar (10-way) (supplied as a complete package) for type 17 socket**


(for max. 100 A continuous load), more positions available on request

**X 211 157 01** with terminal

**X 211 157 02** without terminal

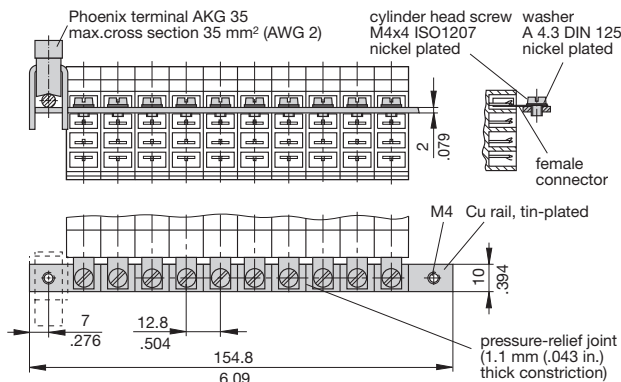

**Insulating sleeving for bus bar (10-way) Y 303 824 01**



**2-way mounting socket**


**23-P10-Si**

(retaining clip Y 300 581 03 available on request)

**6-way mounting socket**

**63-P10-Si**

(retaining clip Y 300 581 03 available on request)

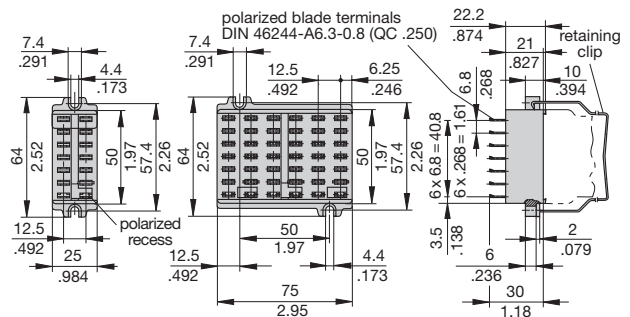


**Connector bus links -P10**

**X 210 588 01/** 1.5 mm<sup>2</sup>, (AWG 16), brown (up to 13 A max. load)


**X 210 588 02/** 2.5 mm<sup>2</sup>, (AWG 14), black (up to 20 A max. load)

**X 210 588 03/** 2.5 mm<sup>2</sup>, (AWG 14), red (up to 20 A max. load)


**X 210 588 04/** 2.5 mm<sup>2</sup>, (AWG 14), blue (up to 20 A max. load)

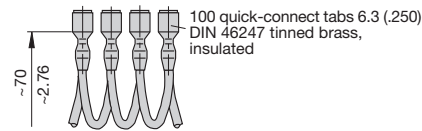

**2 mounting clips Y 300 504 02**



**Installation drawing with mounting clips Y 300 504 02**

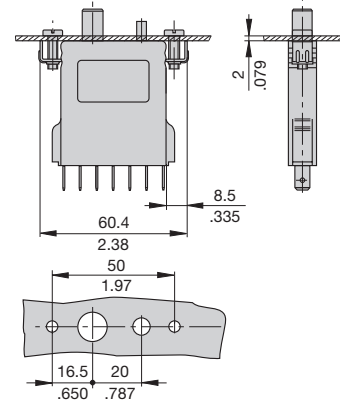

**Pin selection 17-P10-Si fitted with E-1048-60.**

E-1048-60.	17-P10-Si	
IN +	(2)	(2) [2(k)]
IN -	(5)	(5) [12]
F +	(7)	(7) [24]
F -	(3)	(3) [2(i)]
-U <sub>B</sub>	(6)	(6) [23]
Q	(4)	(4) [11]
+U <sub>B</sub>	(1)	(1) [1]

This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.