

L 28

Throughbeam photoelectric sensors

en 02-2012/11 50117574



0 ... 15m



- Throughbeam photoelectric sensor with clearly visible red light and high performance reserve
- Fast alignment through *brightVision*[®]
- Universal option for M18 hole mounting at the front and connector side
- Easy through-hole assembly with anti-rotation protection for mounting nuts on the housing
- Full control through green and yellow indicator LEDs
- Robust, glass fiber reinforced plastic housing acc. to IP 67 for industrial application
- Deactivation output for testing and interlinking of the sensor
- Complementary outputs for light/dark switching




Accessories:

(available separately)

- Mounting systems (BTU 200 ..., BT 200..., BTU D18...)
- M12 connectors (KD ...)
- Ready-made cables (K-D ...)



Dimensioned drawing

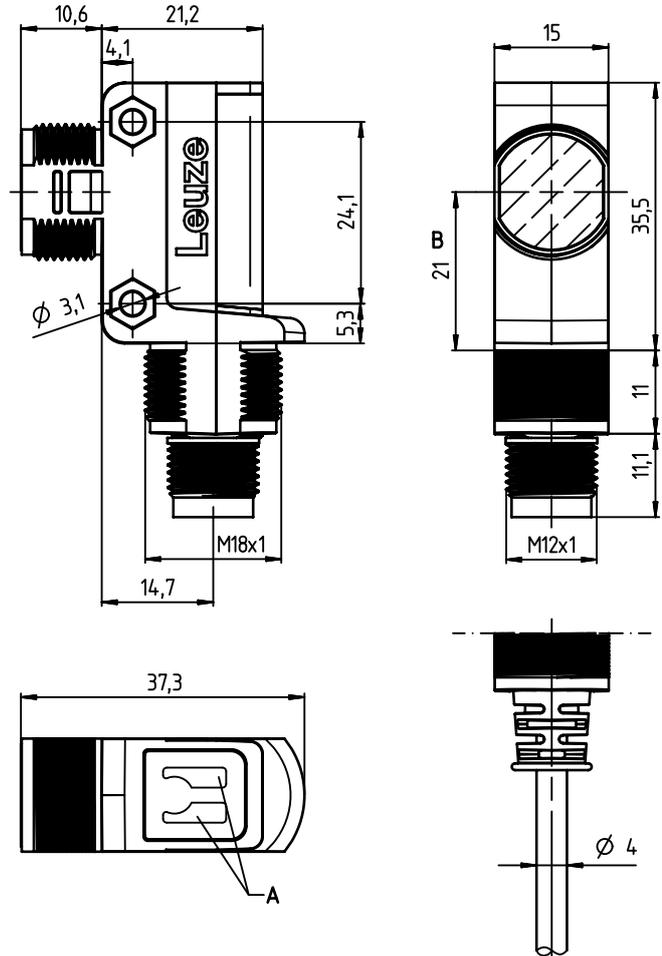



- A Indicator diodes
- B Optical axis

Electrical connection

Receiver

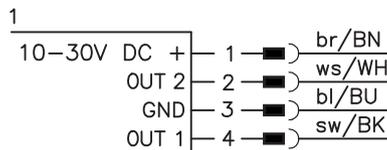

Transmitter

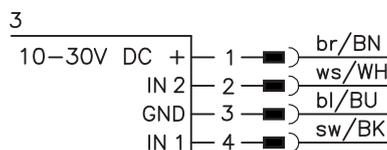

Änderungen vorbehalten • DS_L28_en_50117574.fm

Specifications

Optical data

Typ. operating range limit ¹⁾	0 ... 15m
Operating range ²⁾	0 ... 10m
Light source	LED (modulated light)
Wavelength	620nm (visible red light)

Timing

Switching frequency	500Hz
Response time	1 ms
Delay before start-up	≤ 300ms

Electrical data

Operating voltage U_B	10 ... 30VDC
Residual ripple	≤ 15% of U_B
Open-circuit current	≤ 15mA
Switching output	.../4P... 2 PNP transistor outputs pin 2: PNP dark switching, pin 4: PNP light switching
	.../2N... 2 NPN transistor outputs pin 2: NPN dark switching, pin 4: NPN light switching
Switching input	.../9D... 2 deactivation inputs pin 2: transmitter active when not connected or with HIGH signal pin 4: transmitter active when not connected or with LOW signal
Signal voltage high/low	≥ ($U_B - 2V$) ≤ 2V
Output current	max. 100mA ³⁾

Indicators

Green LED	ready
Yellow LED	light path free
Yellow LED, flashing	light path free, no performance reserve

Mechanical data

Housing	plastic, glass fiber reinforced
Optics cover	plastic
Weight	25g with M12 connector 75g with 2m cable
Connection type	M12 connector, 4-pin cable 2m, 4x0.20mm ²

Environmental data

Ambient temp. (operation/storage)	-40°C ... +60°C / -40°C ... +70°C
Protective circuit ⁴⁾	2, 3
VDE safety class	III
Protection class	IP 67
Light source	free group (in acc. with EN 62471)
Standards applied	IEC 60947-5-2



- 1) Typ. operating range limit: max. attainable range without performance reserve
- 2) Operating range: recommended range with performance reserve
- 3) Sum of the output currents for both outputs, 50mA when ambient temperatures > 40°C
- 4) 2=polarity reversal protection, 3=short circuit protection for all outputs

Tables

0	10.0	15.0
---	------	------

Operating range [m]
Typ. operating range limit [m]

Diagrams



Remarks

- **Approved purpose:**
This product may only be used by qualified personnel and must only be used for the approved purpose. This sensor is not a safety sensor and is not to be used for the protection of persons.

Order guide

The sensors listed here are preferred types; current information at www.leuze.com.

			Designation	Part no.
Transmitter	With 4-pin M12 connector	2 deactivation inputs (pin 4 = IN1, pin 2 = IN2)	LS 28/9D-M12	50117928
	With cable, cable length 2m	2 deactivation inputs (pin 4 = IN1, pin 2 = IN2)	LS 28/9D	50117929
Receiver	With 4-pin M12 connector	Pin 4: PNP light switching, pin 2: PNP dark switching	LE 28/4P-M12	50117930
		Pin 4: NPN light switching, pin 2: NPN dark switching	LE 28/2N-M12	50117932
	With cable, cable length 2m	Pin 4: PNP light switching, pin 2: PNP dark switching	LE 28/4P	50117931
		Pin 4: NPN light switching, pin 2: NPN dark switching	LE 28/2N	50117933

Part number code

		L	E	2	8	/	4	P	-	M	1	2
Operating principle												
LS	Throughbeam photoelectric sensor, transmitter											
LE	Throughbeam photoelectric sensor, receiver											
Series												
28	28 Series											
Switching output/function /OUT1OUT2 (OUT1 = Pin 4, OUT2 = Pin 2)												
4	PNP light switching											
P	PNP, dark switching											
2	NPN, light-switching											
N	NPN dark switching											
9	Input for transmitter deactivation (deactivation with HIGH signal)											
D	Input for transmitter deactivation (deactivation with LOW signal)											
X	Pin not used											
Electrical connection												
-M12	M12 connector, 4-pin											
N/A	Cable, standard length 2000mm											

