



# Solenoid valves VUVG/valve terminals VTUG

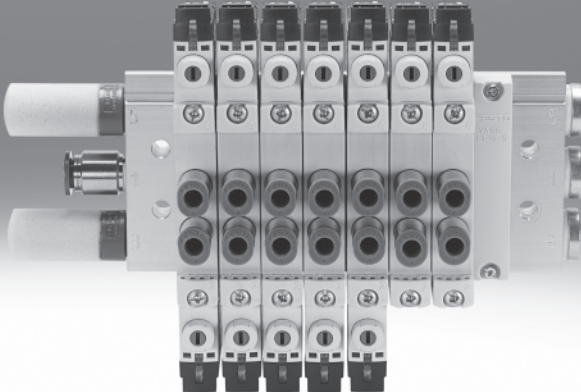

# Solenoid valves VUVG

Key features

FESTO

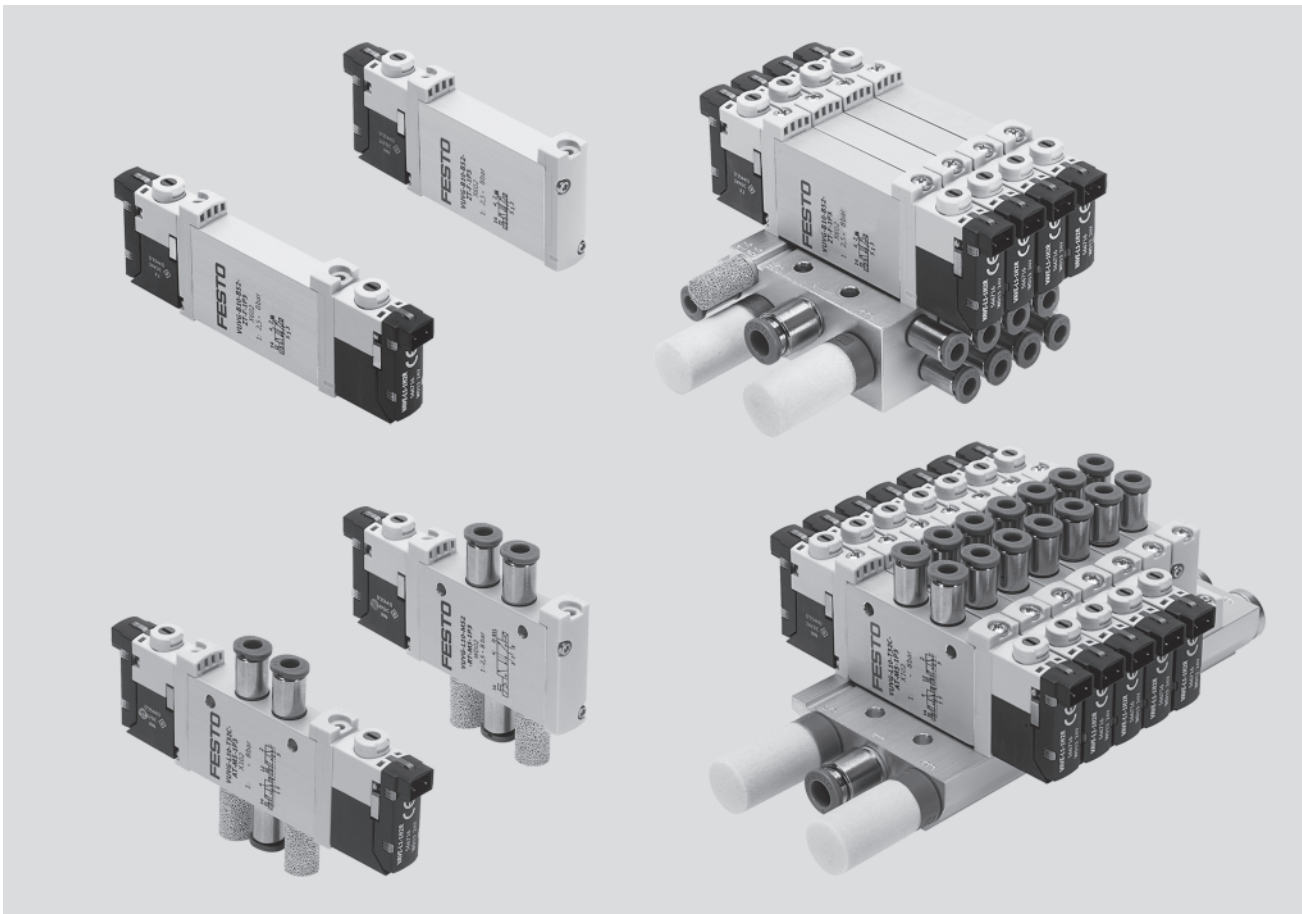

## Innovative

- Both internal and external pilot air supply can be used for manifolds with sub-base valves
- Connection technology easy to change via the E-box
- Max. pressure 10 bar

## Versatile

- Wide range of valve functions
- Choice of quick plug connectors
- In-line valves can be used as individual valves or manifold valves
- M5 and M7 in-line valves can be combined on one manifold rail
- Identical sub-base valves for M5 or M7 manifold rail
- Manifolds with pressure zones
- IP40, IP65

## Reliable

- Sturdy and durable metal components
  - Valves
  - Manifold rails
- Fast troubleshooting thanks to 360° LED display
- Convenient servicing thanks to valves that can be replaced quickly and easily
- Choice of manual override: non-detenting, detenting or covered

## Easy to mount

- Secure mounting on wall or H-rail
- Easy mounting thanks to captive screws and seal
- Connection technology easy to change via the E-box
- Inscription label holder for labelling

## Valve terminal configurator

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product. Valve terminals VTUG are ordered via an identcode.

All valve terminals are supplied fully assembled and individually tested. This reduces assembly and installation time to a minimum.

Download CAD data → [www.festo.com](http://www.festo.com)


Ordering system for valve terminal VTUG

- Individual electrical connection
- Internet: vtug


# Solenoid valves VUVG

Key features – Pneumatic components


## Individual valves and valve manifolds




In-line valve VUVG-L as individual valve




In-line valve VUVG-S for manifold assembly



Valve manifold VTUG from in-line valves VUVG-S




Sub-base valve VUVG-B for manifold assembly




Valve manifold VTUG from sub-base valves VUVG-B


## In-line valve functions




T32C: 2x3/2-way valve with internal pilot air supply, 2x normally closed




T32U: 2x3/2-way valve with internal pilot air supply, 2x normally open




T32H: 2x3/2-way valve with internal pilot air supply, 1x normally closed, 1x normally open




M52: 5/2-way single solenoid valve with internal pilot air supply, size 10




M52: 5/2-way single solenoid valve with internal pilot air supply, size 14



B52: 5/2-way double solenoid valve with internal pilot air supply



P53C: 5/3-way valve with internal pilot air supply, mid-position closed




P53U: 5/3-way valve with internal pilot air supply, mid-position pressurised




P53E: 5/3-way valve with internal pilot air supply, mid-position exhausted


## Sub-base valve functions




T32C: 2x3/2-way valve with external pilot air supply, 2x normally closed




T32U: 2x3/2-way valve with external pilot air supply, 2x normally open




T32H: 2x3/2-way valve with external pilot air supply, 1x normally closed, 1x normally open



M52: 5/2-way single solenoid valve with external pilot air supply, size 10




M52: 5/2-way single solenoid valve with external pilot air supply, size 14




B52: 5/2-way double solenoid valve with external pilot air supply



P53C: 5/3-way valve with external pilot air supply, mid-position closed



P53U: 5/3-way valve with external pilot air supply, mid-position pressurised




P53E: 5/3-way valve with external pilot air supply, mid-position exhausted

# Solenoid valves VUVG

Key features – Pneumatic components


FESTO

## Basic valves VUVG




- Width 10 mm and 14 mm
- In-line valves
- Sub-base valves
- 2x3/2-way, 5/2-way and 5/3-way valves

## E-boxes




- 5, 12 and 24 V DC
- With or without holding current reduction
- LED

## Basic valve and E-box combinations

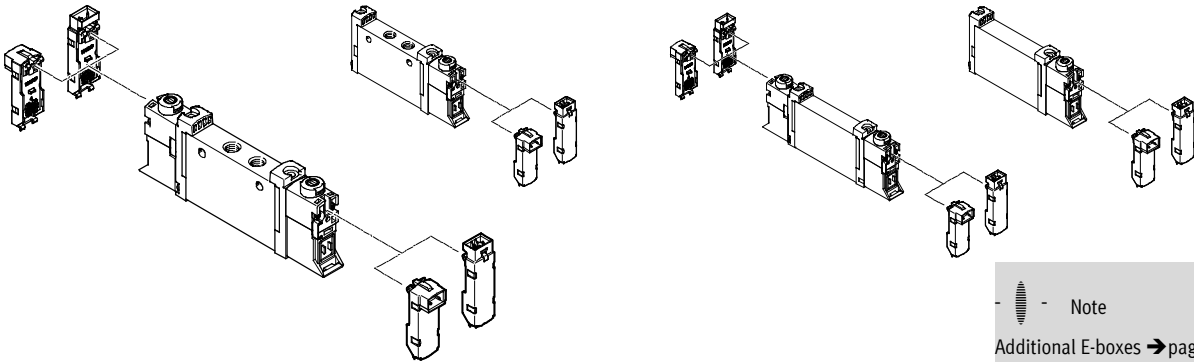


Note  
Additional E-boxes → page 51

## Cover caps for manual override



- Closed cover cap for covering the manual override
- Slotted cover cap for enabling only non-detenting operation of the manual override

## Inscription label holder



- The inscription label holder can be used in place of the slotted cover cap
- The hinged inscription label holder covers the mounting screw and the manual override

## Valve terminal configurator

Download CAD data → [www.festo.com](http://www.festo.com)

A valve terminal configurator is available to help you select a suitable valve terminal VTUG. This makes it much easier to order the right product. Valve terminals VTUG are ordered via an identcode.

Ordering system for valve terminal VTUG

- Individual electrical connection
- Internet: vtug


All valve terminals are supplied fully assembled and individually tested. This reduces assembly and installation time to a minimum.

# Solenoid valves VUVG


Key features – Pneumatic components

FESTO

## Manifold rail for in-line valves



- For in-line valves M3, M5, M7 and G 1/8, width 10
- For 2x3/2-way, 5/2-way and 5/3-way valves
- 2 to 10 and 12, 14, 16 valve positions



Note

With more than seven valve positions, ensure sufficient compressed air supply and exhaust at both ends.

## Blanking plate for vacant position




- Vacant position cover

## Separator for pressure zones



- For creating multiple pressure zones in a valve manifold

## Manifold rail for sub-base valves



- For sub-base valves 10, 10A and 14, width 10
- Manifold rail with M5 or M7 working lines
- For 2x3/2-way, 5/2-way and 5/3-way valves
- 2 to 10, 12, 14 and 16 valve positions
- The sub-base valves always have external pilot air. The pilot air is set via the manifold rail. A short and a long blanking plug are included with the manifold rail for this purpose

## Supply plate



- For additional air supply and exhaust via a valve position

# Solenoid valves VUVG

Key features – Pneumatic components

## Creating pressure zones and separating exhaust air


Compressed air is supplied and exhausted via the manifold rail and via supply plates.

The position of the supply plates and duct separations can be freely selected with the VUVG.






Pressure zones are created by isolating the internal supply ducts between the manifold sub-bases by means of appropriate duct separation.

Pressure zone separation can be used for the following ducts:


- Duct 1
- Duct 3
- Duct 5


 Note

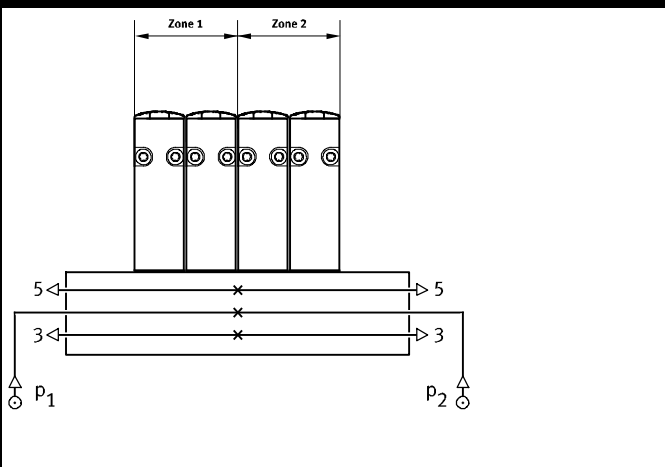- Use a separator if the exhaust air pressures are high
- Use at least one supply plate/supply for each pressure zone
- Pressure zone separation is not possible with pilot air supply (duct 12/14)
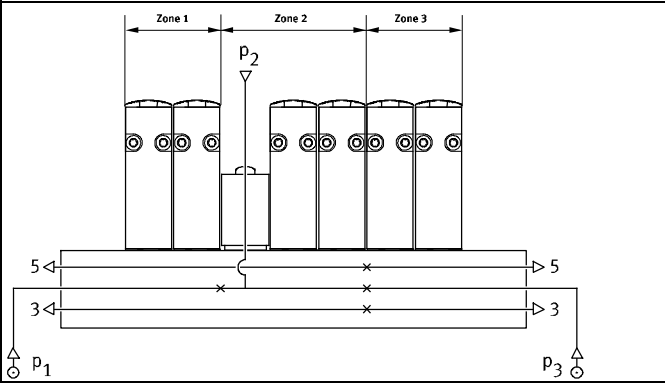
| Duct separation   | Description   |
|---|---|
|   | <p>The pressure zones can be freely configured with the VUVG. The following duct separations are possible:</p> <ul style="list-style-type: none"> <li>• Duct 1 closed</li> </ul>  <ul style="list-style-type: none"> <li>• Duct 1/3/5 closed</li> </ul>  <ul style="list-style-type: none"> <li>• Duct 3/5 closed</li> </ul>  |
|  | <p>The number of pressure zones with the VUVG is only limited by the number of valve positions on the manifold rail. Note that each supply plate occupies one valve position.</p>   |

## Separator VABD



 Note

As the separators are mounted from only one side using a slotted screwdriver, several pressure zones can be created in one profile.

# Solenoid valves VUVG

Key features – Pneumatic components

## Pilot air supply

### Internal pilot air supply

Internal pilot air supply can be chosen with an operating pressure in the range 1.5 ... 8 bar, 2.5 ... 8 bar or 3 ... 8 bar (depending on the valve used).

The pilot air supply is branched from duct 1 (compressed air supply) using an internal connection.


### External pilot air supply

External pilot air supply is required for vacuum operation. The port for external pilot air supply (port 12/14) is located on the valve in the case of in-line valves and on the manifold rail in the case of sub-base valves.

### Pilot exhaust air port


With sub-base valves, the pilot air is exhausted via duct 82/84 of the manifold rail. With in-line valves, the pilot exhaust air escapes via exhaust holes.

## Pilot air supply with in-line and semi in-line valves

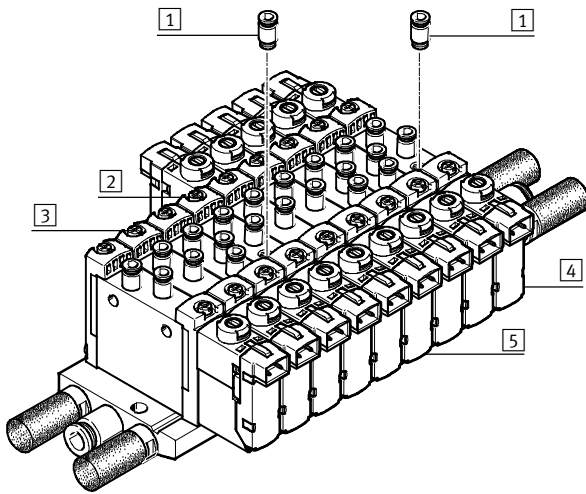

- 1 QS fitting for external pilot air at port 12/14
- 2 Single solenoid valve with external pilot air supply
- 3 Single solenoid valve with internal pilot air supply
- 4 Double solenoid valve with external pilot air supply
- 5 Double solenoid valve with internal pilot air supply


The internal pilot air is branched from port 1 in the valve body. The external pilot air (port 12/14) is supplied individually at each valve housing.



Note

Semi in-line valves cannot be supplied centrally with external pilot air via the manifold rail.

## Pilot air supply with sub-base valves

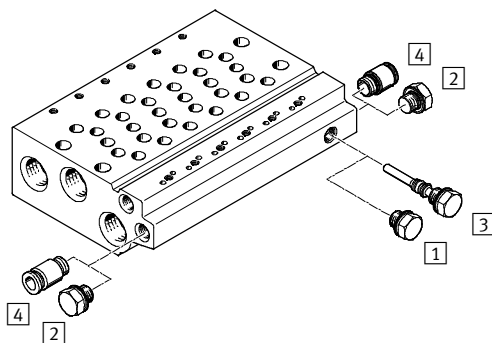

- 1 Blanking plug, short, with internal pilot air
- 2 Blanking plug for duct 12/14 with internal pilot air
- 3 Blanking plug, long, with external pilot air
- 4 QS fitting for duct 12/14 with external pilot air

The manifold rails for sub-base valves have an internal conduit between duct 12/14 and duct 1. Internal or external pilot air supply is selected by inserting a blanking plug into this conduit.

# Solenoid valves VUVG

Key features – Pneumatic components

## Operation with different pressures

Vacuum operation Reverse operation


### Points to note with 3/2-way valves

The 3/2-way valves are available in a design with two valves in one valve body and with pneumatic spring return. With these valves, the energy for the return movement is obtained from port 1.


Vacuum operation is therefore only possible at port 3 and 5, not at port 1.

With external pilot air supply, vacuum can be connected at port 1, 3, 5 with the 5/2-way and 5/3-way valves.


The 3/2-way valves with pneumatic spring are not suitable for reverse operation, since at least the minimum pilot pressure must be present in duct 1.

 Note  
Pressure must be present at port 1.

## Pressure deflector (internal pilot air)

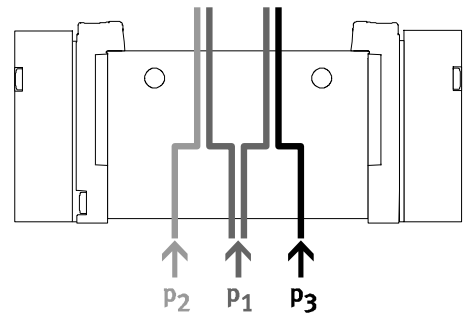

- If two different pressures are required.
- Different pressures can be supplied at duct 1, 3 and 5.


 Note

- With internal pilot air, the minimum pilot pressure must be adhered to in duct 1
- With 2x3/2-way valves without spring return, the minimum pilot pressure must always be adhered to in duct 1

## Advantages

- Any pressure or vacuum can be connected at duct 3 and 5 both with external and internal pilot air

## Vacuum, ejector pulse and normal position

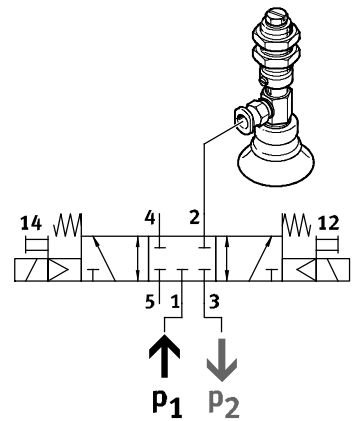



Vacuum, ejector pulse and normal position with internal pilot air can be achieved by connecting vacuum at duct 3 and pressure for the ejector pulse at duct 1.






# Solenoid valves VUVG

Product range overview

FESTO

| Design  | Working line                 | Type code | Functions and flow rate [l/min] |      |      |     |     |      |      |      |   | → Page/<br>Internet |
|---|------------------------------|-----------|---------------------------------|------|------|-----|-----|------|------|------|---|---------------------|
|   |                              |           | T32C                            | T32U | T32H | M52 | B52 | P53C | P53U | P53E |   |                     |
| <b>In-line valve as individual valve</b><br>   | <b>Solenoid valve VUVG-L</b> |           |                                 |      |      |     |     |      |      |      |   |                     |
|   | M3                           | 10A       | –                               | –    | –    | ■   | ■   | ■    | ■    | ■    | ■ | 12                  |
|   | M5                           | 10        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 19                  |
|   | M7                           | 10        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 21                  |
|   | G1/8                         | 14        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 27                  |
| <b>In-line valve for manifold assembly</b><br> | <b>Solenoid valve VUVG-S</b> |           |                                 |      |      |     |     |      |      |      |   |                     |
|   | M3                           | 10A       | –                               | –    | –    | ■   | ■   | ■    | ■    | ■    | ■ | 12                  |
|   | M5                           | 10        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 19                  |
|   | M7                           | 10        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 21                  |
|   | G1/8                         | 14        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 27                  |


| Design   | Working line                 | Type code | Functions and flow rate [l/min] |      |      |     |     |      |      |      |   | → Page/<br>Internet |
|--|------------------------------|-----------|---------------------------------|------|------|-----|-----|------|------|------|---|---------------------|
|  |                              |           | T32C                            | T32U | T32H | M52 | B52 | P53C | P53U | P53E |   |                     |
| <b>Sub-base valve</b><br> | <b>Solenoid valve VUVG-B</b> |           |                                 |      |      |     |     |      |      |      |   |                     |
|  | –                            | 10A       | –                               | –    | –    | ■   | ■   | ■    | ■    | ■    | ■ | 32                  |
|  | –                            | 10        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 39                  |
|  | –                            | 10        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 39                  |
|  | –                            | 14        | ■                               | ■    | ■    | ■   | ■   | ■    | ■    | ■    | ■ | 45                  |

| Design  | Working line  | Type code | Description                 | → Page/<br>Internet |
|---|---|-----------|-----------------------------|---------------------|
| <b>Manifold rail</b><br> | <b>Manifold rail VABM- ... -S- ... , for in-line valves (manifold assembly)</b> |           |                             | vabm                |
|   | –   | –         | Valve size M3, M5, M7, G1/8 |                     |
| <b>Manifold rail</b><br> | <b>Manifold rail VABM, for sub-base valves</b>                                  |           |                             | vabm                |
|   | –   | 10AW      | Connection size M3          |                     |
|   | –   | 10W       | Connection size M5          |                     |
|   | –   | 10HW      | Connection size M7          |                     |
|   | –   | 14W       | Connection size G1/8        |                     |

# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

System overview

## Manifold assembly

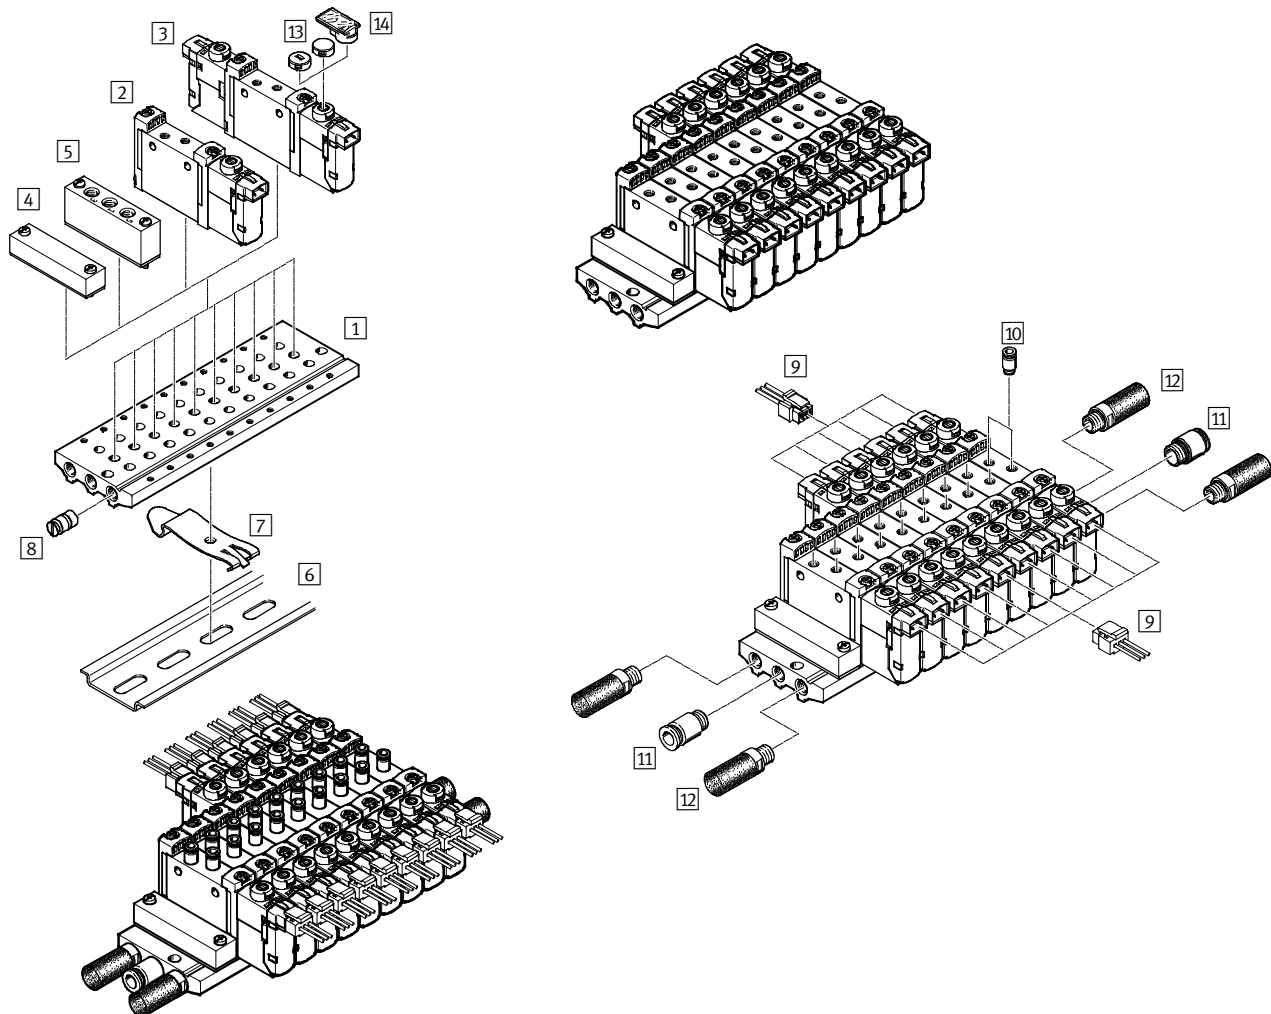

| Manifold assembly and accessories |                          |                     |   |            |
|-----------------------------------|--------------------------|---------------------|---|------------|
|                                   | Type                     | Brief description   | → Page/Internet   |            |
| 1                                 | Manifold rail            | VABM-L1-10AS-M5-... | For 2 to 10, 12, 14 and 16 valve positions                                    | 16         |
| 2                                 | Solenoid valve           | VUVG- ...           | In-line valve, 5/2-way single solenoid  | 11         |
| 3                                 | Solenoid valve           | VUVG-B ...          | In-line valve, 5/2-way double solenoid and 5/3-way valve                      | 11         |
| 4                                 | Blanking plate           | VABB-L1-10-A        | For covering an unused valve position   | 16         |
| 5                                 | Supply plate             | VABF-L1-10A-P3A4-M5 | For air supply port 1 and outlet port 3 and 5                                 | 16         |
| 6                                 | H-rail                   | NRH-35-2000         | For mounting the valve manifold   | 55         |
| 7                                 | H-rail mounting          | VAME-T-M4           | 2 pieces for fitting the valve manifold on an H-rail                          | 55         |
| 8                                 | Separator                | VABD...             | For creating pressure zones   | 16         |
| 9                                 | Plug socket with cable   | NEBV-H1G2-...-LE2   | For E-box H2 and H3   | 53         |
| 10                                | Push-in fitting          | QS...               | Push-in fitting for outlet port 2 and 4                                       | 54         |
| 11                                | Push-in fitting          | QS...               | Push-in fitting for air supply port 1   | quick star |
| 12                                | Silencer                 | U...                | For outlet port 3 and 5   | 54         |
| 13                                | Cover cap                | VMPA-HB...-B        | For manual override   | 55         |
| 14                                | Inscription label holder | ASLR-D              | For labelling the valves, covering the mounting screw and the manual override | 55         |




# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3


Technical data

Function

- 5/2-way, single solenoid
- 5/2-way, double solenoid
- 5/3C, 5/3U, 5/3E

Circuit symbol → page 3

-  - Width 10 mm
-  - Flow rate  
90 ... 100 l/min
-  - Voltage  
5, 12 and 24 V DC

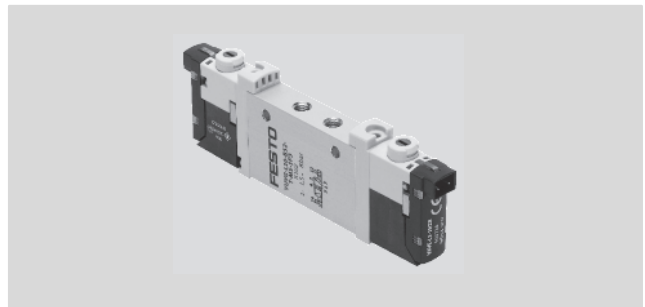

| General technical data         |  |                 |            |                 |                 |                 |
|--------------------------------|--|-----------------|------------|-----------------|-----------------|-----------------|
| Valve function                 | 5/2-way  |                 | 5/2-way M  | 5/3-way         |                 |                 |
| Normal position                | -  | -               | -          | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |
| Stable position                | Monostable   | Bistable        | Monostable | Monostable      |                 |                 |
| Pneumatic spring reset method  | Yes <sup>5)</sup>  | -               | -          | No              |                 |                 |
| Mechanical spring reset method | Yes <sup>5)</sup>  | -               | Yes        | Yes             |                 |                 |
| Vacuum operation at port 1     | Only with external pilot air supply                            |                 |            |                 |                 |                 |
| Design                         | Piston spool valve   |                 |            |                 |                 |                 |
| Sealing principle              | Soft   |                 |            |                 |                 |                 |
| Actuation type                 | Electric   |                 |            |                 |                 |                 |
| Type of control                | Piloted  |                 |            |                 |                 |                 |
| Pilot air supply               | Internal or external   |                 |            |                 |                 |                 |
| Exhaust function               | With flow control  |                 |            |                 |                 |                 |
| Manual override                | Choice of non-detenting, detenting or covered                  |                 |            |                 |                 |                 |
| Type of mounting               | Optionally via through-holes <sup>7)</sup> or on manifold rail |                 |            |                 |                 |                 |
| Mounting position              | Any  |                 |            |                 |                 |                 |
| Nominal size                   | [mm]   | 2               | 1.4        | 2               |                 |                 |
| Standard nominal flow rate     | [l/min]  | 100             | 80         | 90              |                 |                 |
| Flow rate on manifold rail     | [l/min]  | 100             | 80         | 90              |                 |                 |
| Switching time on/off          | [ms]   | 7/15            | -          | 7/21            | 8/25            |                 |
| Changeover time                | [ms]   | -               | 5          | -               | 14              |                 |
| Width                          | [mm]   | 10              |            |                 |                 |                 |
| Port                           | 1, 2, 3, 4, 5, 14  | M3              |            |                 |                 |                 |
| Product weight                 | [g]  | 38              | 49         | 37              |                 |                 |
| Corrosion resistance class     | CRC  | 2 <sup>6)</sup> |            |                 |                 |                 |

- 1) C = Normally closed
- 2) U = Normally open
- 3) E = Normally exhausted
- 5) Combined reset method
- 6) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

FESTO

Technical data

| Operating and environmental conditions                  |                              |   |   |           |            |
|---|------------------------------|---|---|-----------|------------|
| Valve function  |                              | 5/2-way, single solenoid                                | 5/2-way, double solenoid                              | 5/3-way   | 5/2-way M  |
| Operating medium  |                              | Compressed air in accordance with ISO 8573-2010 [7:4:4] |   |           |            |
| Operating pressure at port 1 with pilot air supply      | Internal                     | [bar]   | 2.5 ... 8   | 1.5 ... 8 | 3 ... 8    |
|   | External                     | [bar]   | -0.9 ... 10   |           | -0.9 ... 8 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external         | [bar]   | -0.9 ... 10   |           | -0.9 ... 8 |
|   | Pilot pressure <sup>1)</sup> | [bar]   | 2.5 ... 8   | 1.5 ... 8 | 3 ... 8    |
| Ambient temperature                                     |                              | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |           |            |
| Temperature of medium                                   |                              | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |           |            |

1) Minimum pilot pressure 50% of operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage            | [V DC] 5, 12 and 24 ±10%                              |
| Power                        | [W] 1, reduced to 0.35 with holding current reduction |
| Duty cycle                   | [%] 100   |
| Protection class to EN 60529 | IP40 (with plug socket), IP65 (with M8)               |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

# Solenoid valves VUVG-L10A and VUVG-S10A, in-line valves M3

Technical data

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

5/2-way and 5/3-way valve

The technical drawings show the following dimensions and features:

- Top Left:** Dimensions L8, D1, B1, L9, L9, L10.
- Top Right:** Dimensions L17, L16.
- Middle Left:** Dimensions L5, L4, L7, L6, D2, H1, L2, L3, L1.
- Middle Right:** Dimensions L4, L13, H4, L14.
- Bottom Left:** Dimensions B2, D1, L11, L12.
- Bottom Right:** Dimensions L11, L15, D3, B3.

Legend:

- ⌀ - Note
- Additional dimensions
- E-boxes
- page 51

Legend for callouts:

- 1 Horizontal electrical connection
- 2 Manual override
- 3 Port for external pilot air supply

| Type                  | B1   | B2   | B3   | D1 | D2   | H1   | H2    | L1   | L2   | L3   | L4    | L5    |
|-----------------------|------|------|------|----|------|------|-------|------|------|------|-------|-------|
| VUVG-L-10 -...-M3 ... | 10.2 | 3.6  | 2.83 | M3 | 3.2  | 32.5 | 4.4   | 74.3 | 69.3 | 8    | 18.5  | 25.4  |
| VUVG-S-10 -...-M3 ... | L6   | L7   | L8   | L9 | L10  | L11  | L12   | L13  | L14  | L15  | L16   | L17   |
|                       | 4.85 | 6.15 | 34.9 | 7  | 11.9 | 7.3  | 15.25 | 28.5 | 6.7  | 8.54 | 57.06 | 54.56 |



# Solenoid valves VUVG-S10A, in-line valves M3

Manifold assembly




In-line valves for manifold assembly



## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

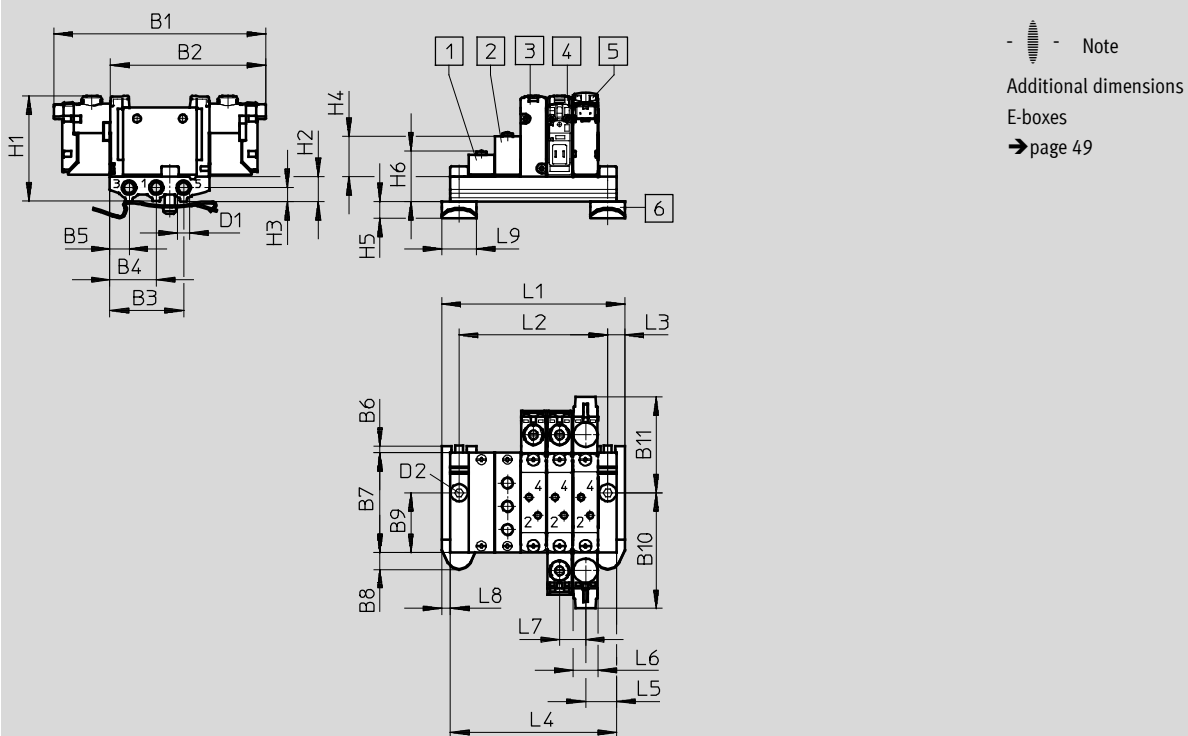


- 1 Blanking plate VABB-L1-10A-S
- 2 Supply plate VABF-L1-10A-P3A4-M3
- 3 Single solenoid valve, without E-box
- 4 Double solenoid valve, without E-box
- 5 Solenoid valve, vertical electrical connection
- 6 H-rail mounting (two M4x16 screws to DIN 912 are required for mounting)

| Type                  | B1   | B2   | B3   | B4   | B5   | B6  | B7   | B8  | B9   | B10  | B11  | D1  |
|-----------------------|------|------|------|------|------|-----|------|-----|------|------|------|-----|
| VUVG-S10A -...-M3 ... | 85.3 | 62.6 | 29.7 | 18.7 | 7.7  | 3   | 40.3 | 6.8 | 24.2 | 46.7 | 38.6 | M5  |
|                       | D2   | H1   | H2   | H3   | H4   | H5  | H6   | L3  | L5   | L6   | L7   | L8  |
|                       | Ø4.5 | 43.8 | 10   | 5.5  | 16.2 | 6.8 | 20.3 | 7   | 12.5 | 10.3 | 10.5 | 3.5 |
|                       | L9   |      |      |      |      |     |      |     |      |      |      |     |
|                       | 14   |      |      |      |      |     |      |     |      |      |      |     |

| Valve positions | 2    | 3  | 4    | 5  | 6    | 7  | 8     | 9   | 10    | 12    | 14    | 16    |
|-----------------|------|----|------|----|------|----|-------|-----|-------|-------|-------|-------|
| L1 [mm]         | 42.5 | 53 | 63.5 | 74 | 84.5 | 95 | 105.5 | 116 | 126.5 | 147.5 | 168.5 | 189.5 |
| L2 [mm]         | 28.5 | 39 | 49.5 | 60 | 70.5 | 81 | 91.5  | 102 | 112.5 | 133.5 | 154.5 | 175.5 |
| L4 [mm]         | 35.5 | 46 | 56.5 | 67 | 77.5 | 88 | 98.5  | 109 | 119.5 | 140.5 | 161.5 | 182.5 |
| VABM weight [g] | 26   | 34 | 42   | 50 | 58   | 66 | 74    | 82  | 90    | 106   | 122   | 138   |

# Solenoid valves VUVG-S10A, in-line valves M3

Ordering data





| Technical data Manifold rails   |         |                 |                         |                    |  |        |      |
|---|---------|-----------------|-------------------------|--------------------|--|--------|------|
|  | Port    | CRC             | Material <sup>2)</sup>  | Operating pressure | Max. tightening torque for assembly [Nm] |        |      |
|   | 1, 3, 5 |                 |                         | [bar]              | Valve                                    | H-rail | Wall |
|   | M5      | 2 <sup>1)</sup> | Wrought aluminium alloy | -0.9 ... 10        | 0.45                                     | 1.5    | 3    |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Note on materials: RoHS-compliant

## Order code Manifold rails

|                                  |   |             |   |            |          |                           |           |          |  |
|----------------------------------|---|-------------|---|------------|----------|---------------------------|-----------|----------|--|
| <b>VABM</b>                      | - | <b>L1</b>   | - | <b>10A</b> | <b>S</b> | -                         | <b>M5</b> | -        |  |
| Manifold assembly parts          |   |             |   |            |          | Number of valve positions |           |          |  |
| Manifold rail                    |   | <b>VABM</b> |   |            |          | 2 to 10, 12, 14 and 16    |           |          |  |
| Valve series                     |   |             |   |            |          | Ports 1, 3 and 5          |           |          |  |
| VUVG                             |   | <b>L1</b>   |   |            |          | <b>M5</b> M5              |           |          |  |
| Valve width                      |   |             |   |            |          |                           |           |          |  |
| 10 mm                            |   |             |   | <b>10A</b> |          |                           |           |          |  |
| Manifold rail with ports 1, 3, 5 |   |             |   |            |          |                           |           |          |  |
| For M3 in-line valves            |   |             |   |            |          |                           |           | <b>S</b> |  |

## Ordering data – Accessories


|   |   |                              |  | Type                            |
|---|---|------------------------------|--|---------------------------------|
| Blanking plate  |   |                              |  | Technical data → Internet: vabb |
|  | For manifold rail for M3 in-line valves | Incl. screws and seal        |  | <b>VABB-L1-10A</b>              |
| Separator   |   |                              |  | Technical data → Internet: vabd |
|  | For manifold rail for M3 in-line valves | Separator for pressure zones |  | <b>VABD-4.2-B</b>               |
| Supply plate  |   |                              |  | Technical data → Internet: vabf |
|  | For manifold rail for M3 in-line valves | Incl. screws and seal        |  | <b>VABF-L1-10A-P3A4-M5</b>      |
| Seals for in-line valves  |   |                              |  | Technical data → Internet: vabd |
|  | M3                                      | 10 seals and 20 screws       |  | <b>VABD-L1-10AX-S-M3</b>        |



# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5/M7

System overview

## Manifold assembly

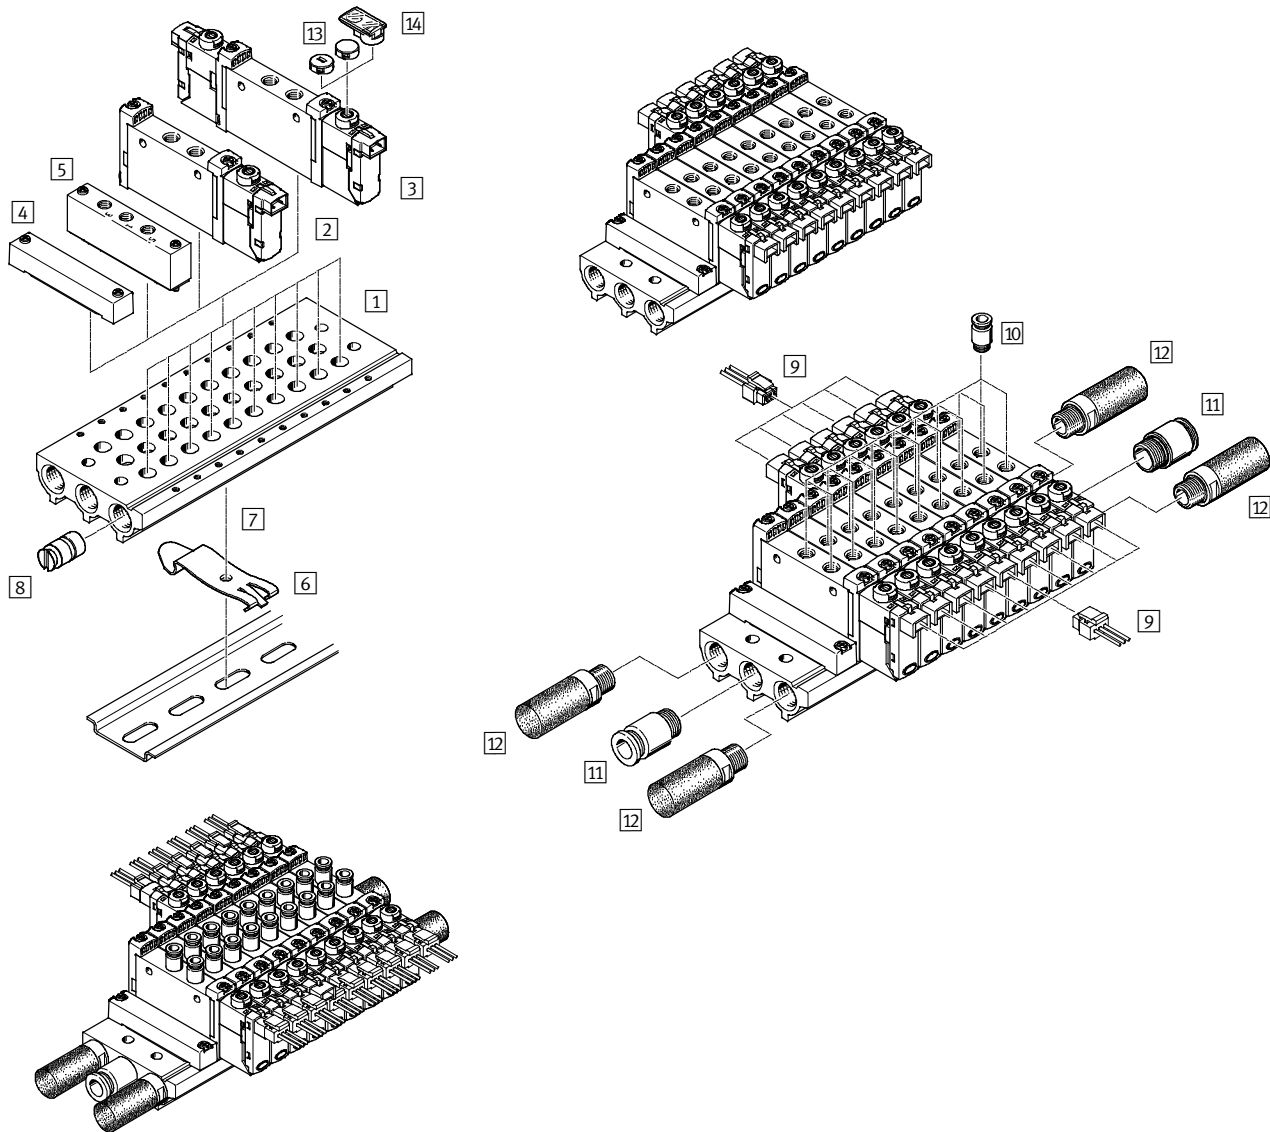

| Manifold assembly and accessories |                          |                      |   |            |
|-----------------------------------|--------------------------|----------------------|---|------------|
|                                   | Type                     | Brief description    | → Page/Internet   |            |
| 1                                 | Manifold rail            | VABM-L1-10S-G18-...  | For 2 to 10, 12, 14 and 16 valve positions                                    | 24         |
| 2                                 | Solenoid valve           | VUVG- ...            | In-line valve, 5/2-way single solenoid  | 18         |
| 3                                 | Solenoid valve           | VUVG- ...            | In-line valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way valve           | 18         |
| 4                                 | Blanking plate           | VABB-L1-10-S         | For covering an unused valve position   | 24         |
| 5                                 | Supply plate             | VABF-L1-10-P3A4- ... | For air supply port 1 and outlet port 3 and 5                                 | 24         |
| 6                                 | H-rail                   | NRH-35-2000          | For mounting the valve manifold   | 53         |
| 7                                 | H-rail mounting          | VAME-T-M4            | 2 pieces for fitting the valve manifold on an H-rail                          | 53         |
| 8                                 | Separator                | VABD-...             | For creating pressure zones   | 24         |
| 9                                 | Plug socket with cable   | NEBV-H1G2-...-LE2    | For E-box H2 and H3   | 53         |
| 10                                | Push-in fitting          | QS...                | Push-in fitting for outlet port 2 and 4                                       | 53         |
| 11                                | Push-in fitting          | QS...                | Push-in fitting for air supply port 1   | quick star |
| 12                                | Silencer                 | U...                 | For outlet port 3 and 5   | 53         |
| 13                                | Cover cap                | VMPA-HB...-B         | For manual override   | 53         |
| 14                                | Inscription label holder | ASLR-D               | For labelling the valves, covering the mounting screw and the manual override | 55         |

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

FESTO

Technical data

Function

2x3/2C, 2x3/2U, 2x3/2H


5/2-way, single solenoid


5/2-way, double solenoid


5/3C, 5/3U, 5/3E

Circuit symbol → page 3

-  - Width 10 mm

-  - Flow rate  
150 ... 220 l/min

-  - Voltage  
5, 12 and 24 V DC

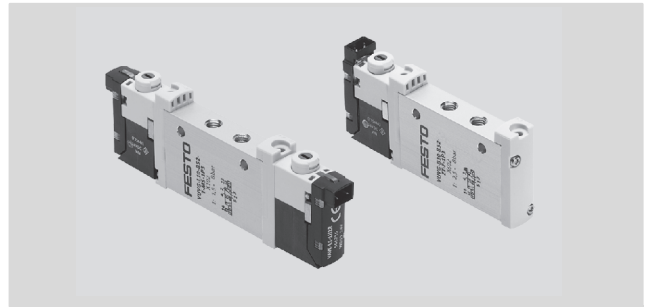

| General technical data             |  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
|------------------------------------|--|-----------------|-----------------|-------------------------------------|-----------------|-----------------|-------------------|----------|------------|-----------------|-----------------|-----------------|-------|-----|
| Valve function                     | 2x3/2-way  |                 |                 | 2x3/2-way M                         |                 |                 | 5/2-way           |          | 5/2-way M  | 5/3-way         |                 |                 |       |     |
| Normal position                    | C <sup>1)</sup>  | U <sup>2)</sup> | H <sup>4)</sup> | C <sup>1)</sup>                     | U <sup>2)</sup> | H <sup>4)</sup> | -                 | -        |            | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |       |     |
| Stable position                    | Monostable   |                 |                 |                                     |                 |                 |                   | Bistable | Monostable | Monostable      |                 |                 |       |     |
| Pneumatic spring reset method      | Yes  |                 |                 | No                                  |                 |                 | Yes <sup>5)</sup> | -        | No         | No              |                 |                 |       |     |
| Mechanical spring reset method     | No   |                 |                 | Yes                                 |                 |                 | Yes <sup>5)</sup> | -        | Yes        | Yes             |                 |                 |       |     |
| Vacuum operation at port 1         | No   |                 |                 | Only with external pilot air supply |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Design                             | Piston spool valve   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Sealing principle                  | Soft   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Actuation type                     | Electric   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Type of control                    | Piloted  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Pilot air supply                   | Internal or external   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Exhaust function                   | With flow control  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Manual override                    | Choice of non-detenting, detenting or covered                  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Type of mounting                   | Optionally via through-holes <sup>7)</sup> or on manifold rail |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Mounting position                  | Any  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Nominal size [mm]                  | 2.7  |                 |                 | 1.9                                 |                 |                 | 1.8               |          | 3.2        |                 | 2.2             |                 | 3.2   |     |
| Standard nominal flow rate [l/min] | 150  |                 |                 | 135                                 |                 |                 | 125               |          | 125        |                 | 220             |                 | 190   | 210 |
| Flow rate on manifold rail [l/min] | 150  |                 |                 | 135                                 |                 |                 | 125               |          | 125        |                 | 220             |                 | 190   | 210 |
| Switching time on/off [ms]         | 6/16   |                 |                 | 8/11                                |                 |                 | 7/19              |          | -          |                 | 8/24            |                 | 10/30 |     |
| Changeover time [ms]               | -  |                 |                 | -                                   |                 |                 | -                 |          | 7          |                 | -               |                 | 16    |     |
| Width [mm]                         | 10   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Port                               | 1, 2, 3, 4, 5  |                 |                 | M5                                  |                 |                 |                   |          |            |                 |                 |                 |       |     |
|                                    | 12, 14   |                 |                 | M3                                  |                 |                 |                   |          |            |                 |                 |                 |       |     |
| Product weight [g]                 | 55   |                 |                 | 54                                  |                 |                 | 45                |          | 55         |                 | 44              |                 | 55    |     |
| Corrosion resistance class         | CRC  |                 |                 | 2 <sup>6)</sup>                     |                 |                 |                   |          |            |                 |                 |                 |       |     |

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H = 2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M5

Technical data

| Operating and environmental conditions                  |  |       |   |             |                          |                          |                   |             |
|---|--|-------|---|-------------|--------------------------|--------------------------|-------------------|-------------|
| Valve function  |  |       | 2x3/2-way   | 2x3/2-way M | 5/2-way, single solenoid | 5/2-way, double solenoid | 5/2-way M 5/3-way |             |
| Operating medium  | Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated |       |   |             |                          |                          |                   |             |
| Operating pressure at port 1 with pilot air supply      | Internal   | [bar] | 1.5 ... 8   | 2.5 ... 8   | 2.5 ... 8                | 1.5 ... 8                | 3 ... 8           |             |
|   | External   | [bar] | 1.5 ... 10  | -0.9 ... 10 |                          |                          | -0.9 ... 8        | -0.9 ... 10 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external   | [bar] | -0.9 ... 10   |             |                          |                          | -0.9 ... 8        | -0.9 ... 10 |
|   |  | [bar] | 1.5 ... 8   | 2 ... 8     | 2.5 ... 8                | 1.5 ... 8                | 3 ... 8           |             |
| Pilot pressure <sup>1)</sup>                            |  | [bar] | -5 ... +50, -5 ... +60 with holding current reduction |             |                          |                          |                   |             |
| Ambient temperature                                     |  | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |             |                          |                          |                   |             |
| Temperature of medium                                   |  | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |             |                          |                          |                   |             |

1) Minimum pilot pressure 50% of operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage [V DC]     | 5, 12 and 24 ±10%                                 |
| Power [W]                    | 1, reduced to 0.35 with holding current reduction |
| Duty cycle [%]               | 100   |
| Protection class to EN 60529 | IP40 (with plug socket), IP65 (with M8)           |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

## Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

2x3/2-way, 5/2-way and 5/3-way valve

- Note

Additional dimensions E-boxes → page 49

**1** Vertical electrical connection

**2** Horizontal electrical connection

**3** Manual override

**4** Port for external pilot air supply

| Type                 | B1   | B2   | D1 | D2  | D3 | H1   | H2  | H3  | L1   | L2   | L3 | L4 |
|----------------------|------|------|----|-----|----|------|-----|-----|------|------|----|----|
| VUVG-L-10 ...-M5 ... | 10.2 | -    | M5 | 3.2 | M3 | 32.5 | 3.6 | 4.4 | 86.5 | 81.5 | 8  | 27 |
| VUVG-S-10 ...-M5 ... | L5   | L6   | L7 | L8  | L9 | L10  | L11 | L12 | L13  | L14  |    |    |
|                      | 4.85 | 6.15 | 47 | 14  | 11 | 12   | 19  | -   | 69.2 | 66.7 |    |    |

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

FESTO

Technical data

Function


2x3/2C, 2x3/2U, 2x3/2H


5/2-way, single solenoid

5/2-way, double solenoid


5/3C, 5/3U, 5/3E

-  - Width 10 mm

-  - Flow rate  
190 ... 380 l/min

-  - Voltage  
5, 12 and 24 V DC

Circuit symbol → page 3

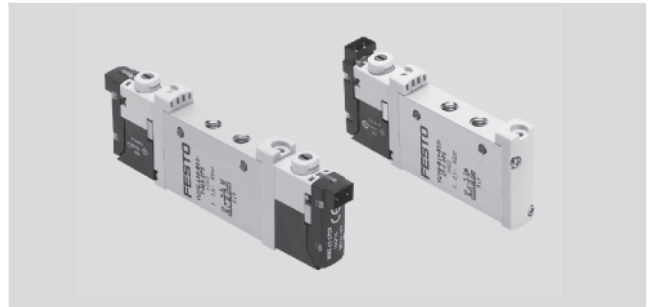

| General technical data             |  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
|------------------------------------|--|-----------------|-----------------|-------------------------------------|-----------------|-----------------|-------------------|----------|------------|-----------------|-----------------|-----------------|
| Valve function                     | 2x3/2-way  |                 |                 | 2x3/2-way M                         |                 |                 | 5/2-way           |          | 5/2-way M  | 5/3-way         |                 |                 |
| Normal position                    | C <sup>1)</sup>  | U <sup>2)</sup> | H <sup>4)</sup> | C <sup>1)</sup>                     | U <sup>2)</sup> | H <sup>4)</sup> | -                 | -        |            | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |
| Stable position                    | Monostable   |                 |                 |                                     |                 |                 |                   | Bistable | Monostable | Monostable      |                 |                 |
| Pneumatic spring reset method      | Yes  |                 |                 | No                                  |                 |                 | Yes <sup>5)</sup> | -        | No         | No              |                 |                 |
| Mechanical spring reset method     | No   |                 |                 | Yes                                 |                 |                 | Yes <sup>5)</sup> | -        | Yes        | Yes             |                 |                 |
| Vacuum operation at port 1         | No   |                 |                 | Only with external pilot air supply |                 |                 |                   |          |            |                 |                 |                 |
| Design                             | Piston spool valve   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Sealing principle                  | Soft   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Actuation type                     | Electric   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Type of control                    | Piloted  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Pilot air supply                   | Internal or external   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Exhaust function                   | With flow control  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Manual override                    | Choice of non-detenting, detenting or covered                  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Type of mounting                   | Optionally via through-holes <sup>7)</sup> or on manifold rail |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Mounting position                  | Any  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Nominal size [mm]                  | 2.7  | 2.0             | 1.9             | 1.9                                 | 4.0             | 2.8             | 3.5               |          |            |                 |                 |                 |
| Standard nominal flow rate [l/min] | 190  | 150             | 140             | 140                                 | 380             | 320             | 320               |          |            |                 |                 |                 |
| Flow rate on manifold rail [l/min] | 170  | 140             | 130             | 130                                 | 340             | 290             | 300               |          |            |                 |                 |                 |
| Switching time on/off [ms]         | 6/16   |                 | 8/11            |                                     |                 | 7/19            | -                 | 8/24     |            | 10/30           |                 |                 |
| Changeover time [ms]               | -  |                 |                 |                                     |                 |                 | 7                 |          | 16         |                 |                 |                 |
| Width [mm]                         | 10   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Port                               | 1, 2, 3, 4, 5  |                 |                 | M7                                  |                 |                 |                   |          |            |                 |                 |                 |
|                                    | 12, 14   |                 |                 | M3                                  |                 |                 |                   |          |            |                 |                 |                 |
| Product weight [g]                 | 55   |                 |                 | 54                                  |                 |                 | 45                | 55       | 44         | 55              |                 |                 |
| Corrosion resistance class         | CRC  |                 |                 | 2 <sup>6)</sup>                     |                 |                 |                   |          |            |                 |                 |                 |

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H = 2x3/2-way valve in one housing with 1x normally closed and 1x normally open

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

7) If several valves are to be screwed together via the through-holes to form a block, a minimum gap of 0.3 mm must be ensured by placing spacer discs between them.

# Solenoid valves VUVG-L10 and VUVG-S10, in-line valves M7

Technical data

| Operating and environmental conditions                  |  |             |                          |                          |           |            |             |
|---|--|-------------|--------------------------|--------------------------|-----------|------------|-------------|
| Valve function  | 2x3/2-way  | 2x3/2-way M | 5/2-way, single solenoid | 5/2-way, double solenoid | 5/2-way M | 5/3-way    |             |
| Operating medium  | Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated |             |                          |                          |           |            |             |
| Operating pressure at port 1 with pilot air supply      | Internal   | [bar]       | 1.5 ... 8                | 2.5 ... 8                | 2.5 ... 8 | 1.5 ... 8  |             |
|   | External   | [bar]       | 1.5 ... 10               | -0.9 ... 10              |           | -0.9 ... 8 | -0.9 ... 10 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external   | [bar]       | -0.9 ... 10              |                          |           | -0.9 ... 8 | -0.9 ... 10 |
|   | Pilot pressure <sup>1)</sup>   | [bar]       | 1.5 ... 8                | 2 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
| Ambient temperature                                     | [°C] -5 ... +50, -5 ... +60 with holding current reduction                     |             |                          |                          |           |            |             |
| Temperature of medium                                   | [°C] -5 ... +50, -5 ... +60 with holding current reduction                     |             |                          |                          |           |            |             |

1) Minimum pilot pressure 50% of operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage            | [V DC] 5, 12, 24 ±10%                                 |
| Power                        | [W] 1, reduced to 0.35 with holding current reduction |
| Duty cycle                   | [%] 100   |
| Protection class to EN 60529 | IP40 (with plug socket), IP65 (with M8)               |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)

2x3/2-way, 5/2-way and 5/3-way valve

- - Note  
Additional dimensions  
E-boxes  
→ page 49

1 Vertical electrical connection     
 2 Horizontal electrical connection     
 3 Manual override     
 4 Port for external pilot air supply


| Type                  | B1   | B2   | D1 | D2  | D3 | H1   | H2  | H3  | L1   | L2   | L3 | L4 |
|-----------------------|------|------|----|-----|----|------|-----|-----|------|------|----|----|
| VUVG-L-10 -...-M7 ... | 10.2 | -    | M7 | 3.2 | M3 | 32.5 | 3.6 | 4.4 | 86.5 | 81.5 | 8  | 27 |
| VUVG-S-10 -...-M7 ... | L5   | L6   | L7 | L8  | L9 | L10  | L11 | L12 | L13  | L14  |    |    |
|                       | 4.85 | 6.15 | 47 | 14  | 11 | 12   | 19  | -   | 69.2 | 66.7 |    |    |



# Solenoid valves VUVG-S10, in-line valves M5/M7


Manifold assembly

In-line valves for manifold assembly

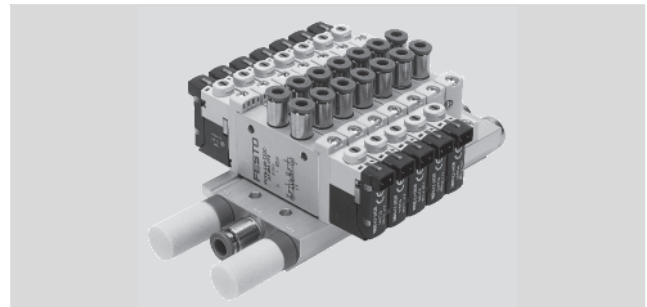

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

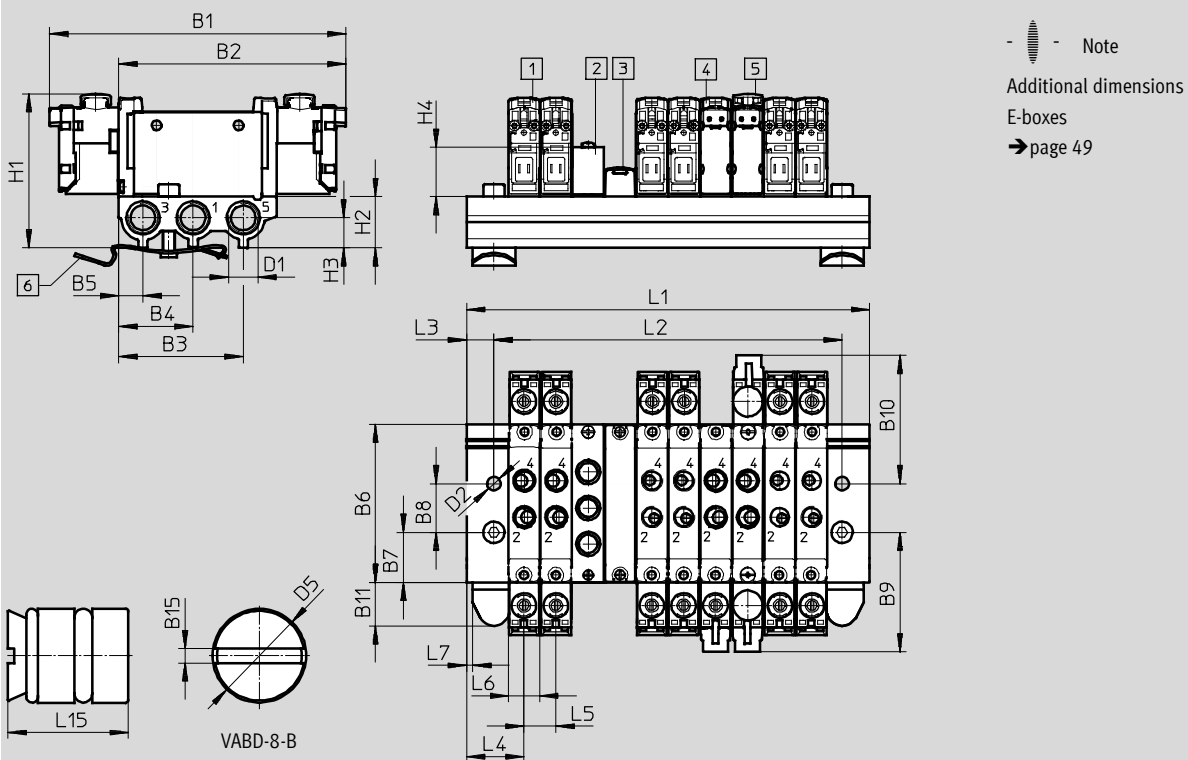


- 1 Solenoid valve, vertical electrical connection
- 2 Supply plate M5 or M7 for 1, 3, 5
- 3 Blanking plate VABB-L1-10-S
- 4 Solenoid valve, horizontal electrical connection
- 5 Cover cap for manual override
- 6 H-rail mounting (two M4x20 screws to DIN 912 are required)

| Type                |      |      |    |      |      |    |      |    |      |      |       |     |
|---------------------|------|------|----|------|------|----|------|----|------|------|-------|-----|
| VUVG-S10 ...-M5 ... | B1   | B2   | B3 | B4   | B5   | B6 | B7   | B8 | B9   | B10  | B11   | B15 |
|                     | 97.5 | 74.8 | 41 | 24.5 | 8    | 52 | 16.5 | 16 | 39.2 | 42.3 | 14.45 | 1   |
|                     | D1   | D2   | D5 | H1   | H2   | H3 | H4   | L3 | L4   | L5   | L6    | L7  |
|                     | G1/8 | 4.5  | Ø8 | 50.6 | 16.8 | 7  | 16.2 | 9  | 19   | 10.5 | 10.2  | 2   |
|                     | L15  |      |    |      |      |    |      |    |      |      |       |     |
|                     | 10   |      |    |      |      |    |      |    |      |      |       |     |

| Valve positions | 2    | 3  | 4    | 5   | 6    | 7   | 8     | 9   | 10    | 12    | 14    | 16    | 22    |
|-----------------|------|----|------|-----|------|-----|-------|-----|-------|-------|-------|-------|-------|
| L1 [mm]         | 40.5 | 51 | 61.5 | 72  | 82.5 | 93  | 103.5 | 114 | 124.5 | 145.5 | 166.5 | 187.5 | 250.5 |
| L2 [mm]         | 30.5 | 41 | 51.5 | 62  | 72.5 | 83  | 93.5  | 104 | 114.5 | 135.5 | 156.5 | 177.5 | 240.5 |
| VABM weight [g] | 66   | 81 | 96   | 111 | 126  | 141 | 156   | 171 | 186   | 216   | 246   | 276   | 363   |

# Solenoid valves VUVG-S10, in-line valves M5/M7

Ordering data





| Technical data Manifold rails   |                 |                 |                         |                    |  |        |      |
|---|-----------------|-----------------|-------------------------|--------------------|--|--------|------|
|   | Port            | CRC             | Material <sup>2)</sup>  | Operating pressure | Max. tightening torque for assembly [Nm] |        |      |
|   | 1, 3, 5         |                 |                         | [bar]              | Valve                                    | H-rail | Wall |
|  | G $\frac{1}{8}$ | 2 <sup>1)</sup> | Wrought aluminium alloy | -0.9 ... 10        | 0.45                                     | 1.5    | 3    |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Note on materials: RoHS-compliant

## Order code Manifold rails

|                                  |             |           |   |                            |          |   |            |   |  |
|----------------------------------|-------------|-----------|---|----------------------------|----------|---|------------|---|--|
| <b>VABM</b>                      | -           | <b>L1</b> | - | <b>10</b>                  | <b>S</b> | - | <b>G18</b> | - |  |
| Manifold assembly parts          |             |           |   |                            |          |   |            |   |  |
| Manifold rail                    | <b>VABM</b> |           |   |                            |          |   |            |   |  |
| Valve series                     |             |           |   |                            |          |   |            |   |  |
| VUVG                             | <b>L1</b>   |           |   |                            |          |   |            |   |  |
| Valve width                      |             |           |   |                            |          |   |            |   |  |
| 10 mm                            | <b>10</b>   |           |   |                            |          |   |            |   |  |
| Manifold rail with ports 1, 3, 5 |             |           |   |                            |          |   |            |   |  |
| For M5 and M7 in-line valves     | <b>S</b>    |           |   |                            |          |   |            |   |  |
|                                  |             |           |   | Number of valve positions  |          |   |            |   |  |
|                                  |             |           |   | 2 to 10, 12, 14 and 16     |          |   |            |   |  |
|                                  |             |           |   | Ports 1, 3 and 5           |          |   |            |   |  |
|                                  |             |           |   | <b>G18</b> G $\frac{1}{8}$ |          |   |            |   |  |

## Ordering data – Accessories


|   |  |                              |  | Type                            |
|---|--|------------------------------|--|---------------------------------|
| Blanking plate  |  |                              |  | Technical data → Internet: vabb |
|  | For manifold rail for M5/M7 in-line valves | Incl. screws and seal        |  | <b>VABB-L1-10-S</b>             |
| Separator   |  |                              |  | Technical data → Internet: vabd |
|  | For manifold rail for M5/M7 in-line valves | Separator for pressure zones |  | <b>VABD-8-B</b>                 |
| Supply plate  |  |                              |  | Technical data → Internet: vabf |
|  | For manifold rail for M5 in-line valves    | Incl. screws and seal        |  | <b>VABF-L1-10-P3A4-M5</b>       |
|   | For manifold rail for M7 in-line valves    |                              |  | <b>VABF-L1-10-P3A4-M7</b>       |
| Seals for in-line valves  |  |                              |  | Technical data → Internet: vabd |
|  | M5   | 10 seals and 20 screws       |  | <b>VABD-L1-10X-S-M5</b>         |
|   | M7   |                              |  | <b>VABD-L1-10X-S-M7</b>         |



# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

System overview

## Manifold assembly

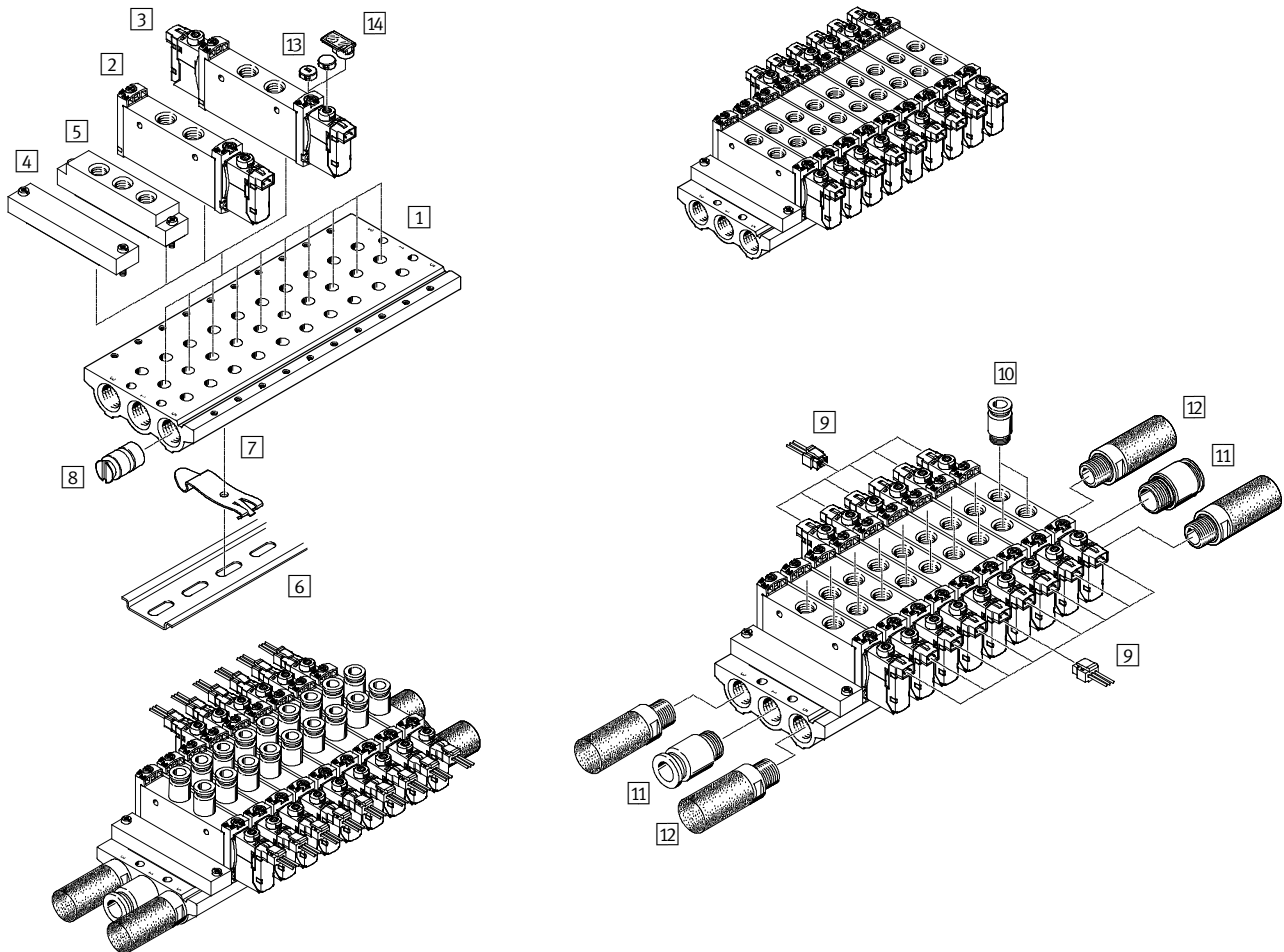

| Manifold assembly and accessories |                          |                       |   |            |
|-----------------------------------|--------------------------|-----------------------|---|------------|
|                                   | Type                     | Brief description     | → Page/Internet   |            |
| 1                                 | Manifold rail            | VABM-L1-14S-G14 ...   | For 2 to 10, 12, 14 and 16 valve positions                                    | 30         |
| 2                                 | Solenoid valve           | VUVG- ...             | In-line valve, 5/2-way single solenoid  | 26         |
| 3                                 | Solenoid valve           | VUVG- ...             | In-line valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way valve           | 26         |
| 4                                 | Blanking plate           | VABB-L1-14            | For covering an unused valve position   | 30         |
| 5                                 | Supply plate             | VABF-L1-14-P3A4- ...  | For air supply port 1 and outlet port 3 and 5                                 | 30         |
| 6                                 | H-rail                   | NRH-35-2000           | For mounting the valve manifold   | 54         |
| 7                                 | H-rail mounting          | VAME-T-M4             | 2 pieces for fitting the valve manifold on an H-rail                          | 54         |
| 8                                 | Separator                | VABD...               | For creating pressure zones   | 30         |
| 9                                 | Plug socket with cable   | NEBV-H1 G2-KN-...-LE2 | For E-box H2 and H3   | 53         |
| 10                                | Push-in fitting          | QS...                 | Push-in fitting for outlet port 2 and 4                                       | 53         |
| 11                                | Push-in fitting          | QS...                 | Push-in fitting for air supply port 1   | quick star |
| 12                                | Silencer                 | U...                  | For outlet port 3 and 5   | 53         |
| 13                                | Cover cap                | VMPA-HB...-B          | For manual override   | 53         |
| 14                                | Inscription label holder | ASLR-D                | For labelling the valves, covering the mounting screw and the manual override | 55         |

# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

FESTO

Technical data

Function

2x3/2C, 2x3/2U, 2x3/2H


5/2-way, single solenoid


5/2-way, double solenoid


5/3C, 5/3U, 5/3E

Circuit symbol → page 3

-  - Width 14 mm

-  - Flow rate  
580 ... 780 l/min

-  - Voltage  
5, 12 and 24 V DC

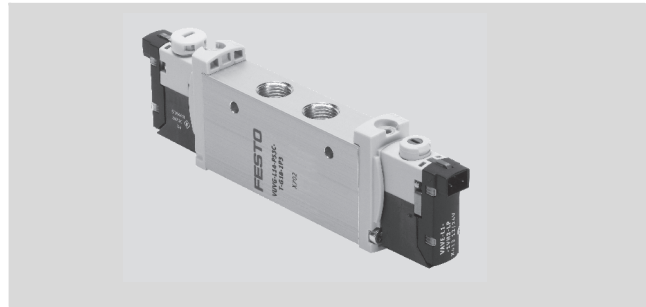

| General technical data             |  |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
|------------------------------------|--|-----------------|-----------------|-------------------------------------|-----------------|-----------------|---------|----------|-----------|------------|-----------------|-----------------|-----------------|
| Valve function                     | 2x3/2-way  |                 |                 | 2x3/2-way M                         |                 |                 | 5/2-way |          | 5/2-way M |            | 5/3-way         |                 |                 |
| Normal position                    | C <sup>1)</sup>  | U <sup>2)</sup> | H <sup>4)</sup> | C <sup>1)</sup>                     | U <sup>2)</sup> | C <sup>1)</sup> | -       | -        |           |            | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |
| Stable position                    | Monostable   |                 |                 |                                     |                 |                 |         | Bistable |           | Monostable |                 |                 |                 |
| Pneumatic spring reset method      | Yes  |                 |                 | No                                  |                 |                 | -       |          | No        |            | No              |                 |                 |
| Mechanical spring reset method     | No   |                 |                 | Yes                                 |                 |                 | -       |          | Yes       |            | Yes             |                 |                 |
| Vacuum operation at port 1         | No   |                 |                 | Only with external pilot air supply |                 |                 |         |          |           |            |                 |                 |                 |
| Design                             | Piston spool valve   |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Sealing principle                  | Soft   |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Actuation type                     | Electric   |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Type of control                    | Piloted  |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Pilot air supply                   | Internal or external   |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Exhaust function                   | With flow control  |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Manual override                    | Choice of non-detenting, detenting or covered                  |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Type of mounting                   | Optionally via through-holes <sup>7)</sup> or on manifold rail |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Mounting position                  | Any  |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Nominal size [mm]                  | 4.6  |                 |                 | 4.3                                 |                 |                 | 5.6     |          |           |            |                 |                 |                 |
| Standard nominal flow rate [l/min] | 650  | 600             | 650             | 550                                 | 500             | 500             | 780     |          | 780       | 650        | 600             |                 |                 |
| Flow rate on manifold rail [l/min] | 620  | 580             | 580             | 520                                 | 480             | 480             | 730     |          | 700       | 620        | 580             |                 |                 |
| Switching time on/off [ms]         | 8/23   |                 |                 | 11/15                               |                 |                 | 14/28   |          | -         | 13/40      |                 | 12/40           |                 |
| Changeover time [ms]               | -  |                 |                 |                                     |                 |                 |         | 8        |           | -          |                 | 20              |                 |
| Width [mm]                         | 14   |                 |                 |                                     |                 |                 |         |          |           |            |                 |                 |                 |
| Port                               | 1, 2, 3, 4, 5  |                 |                 | G1/8                                |                 |                 |         |          |           |            |                 |                 |                 |
|                                    | 14   |                 |                 | M5                                  |                 |                 |         |          |           |            |                 |                 |                 |
| Product weight [g]                 | 89   |                 |                 | 80                                  |                 |                 | 78      | 89       | 70        | 89         |                 |                 |                 |
| Corrosion resistance class         | CRC  |                 |                 | 2 <sup>6)</sup>                     |                 |                 |         |          |           |            |                 |                 |                 |

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H = 2x3/2-way valve in one housing with 1x normally closed and 1x normally open

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

# Solenoid valves VUVG-L14 and VUVG-S14, in-line valves G1/8

Technical data

| Operating and environmental conditions                  |  |       |   |             |                          |                          |           |            |
|---|--|-------|---|-------------|--------------------------|--------------------------|-----------|------------|
| Valve function  |  |       | 2x3/2-way   | 2x3/2-way M | 5/2-way, single solenoid | 5/2-way, double solenoid | 5/2-way M | 5/3-way    |
| Operating medium  | Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated |       |   |             |                          |                          |           |            |
| Operating pressure at port 1 with pilot air supply      | Internal   | [bar] | 1.5 ... 8   | 3 ... 8     | 2.5 ... 8                | 1.5 ... 8                | 3 ... 8   |            |
|   | External   | [bar] | 1.5... 10   | -0.9... 10  |                          |                          | -0.9... 8 | -0.9... 10 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external   | [bar] | -0.9... 10  |             |                          |                          | -0.9... 8 | -0.9... 10 |
|   |  | [bar] | 1.5 ... 8   | 2 ... 8     | 2.5 ... 8                | 1.5 ... 8                | 3 ... 8   |            |
| Pilot pressure <sup>1)</sup>                            |  | [bar] | 1.5 ... 8   | 2 ... 8     | 2.5 ... 8                | 1.5 ... 8                | 3 ... 8   |            |
| Ambient temperature                                     |  | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |             |                          |                          |           |            |
| Temperature of medium                                   |  | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |             |                          |                          |           |            |

1) Minimum pilot pressure 50% of the operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage            | [V DC] 5, 12 and 24 ±10%                              |
| Power                        | [W] 1, reduced to 0.35 with holding current reduction |
| Duty cycle                   | [%] 100   |
| Protection class to EN 60529 | IP40 (with plug socket), IP65 (with M8)               |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

**Dimensions** Download CAD data → [www.festo.com](http://www.festo.com)

2x3/2-way, 5/2-way and 5/3-way valve

- - Note  
Additional dimensions  
E-boxes  
→ page 49

1 Horizontal electrical connection     
 2 Manual override     
 3 Port for external pilot air supply

| Type                  | B1   | B2    | D1   | D2   | D3    | H1    | H2   | L1   | L2    | L3 | L4 | L5   | L6   |
|-----------------------|------|-------|------|------|-------|-------|------|------|-------|----|----|------|------|
| VUVG-L-14 ...-G18 ... | 14.4 | 2.3   | G1/8 | Ø3.2 | M5    | 34.8  | 5.8  | 107  | 102   | 8  | 37 | 4.85 | 6.15 |
| VUVG-S-14 ...-G18 ... | L7   | L8    | L9   | L10  | L11   | L12   | L13  | L14  | L15   |    |    |      |      |
|                       | 66.5 | 18.35 | 14.9 | 18   | 24.25 | 13.45 | 10.8 | 89.4 | 86.95 |    |    |      |      |




# Solenoid valves VUVG-S14, in-line valves G1/8

Manifold assembly




In-line valves for manifold assembly

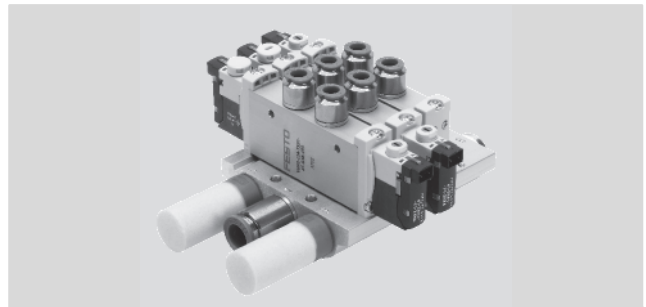

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

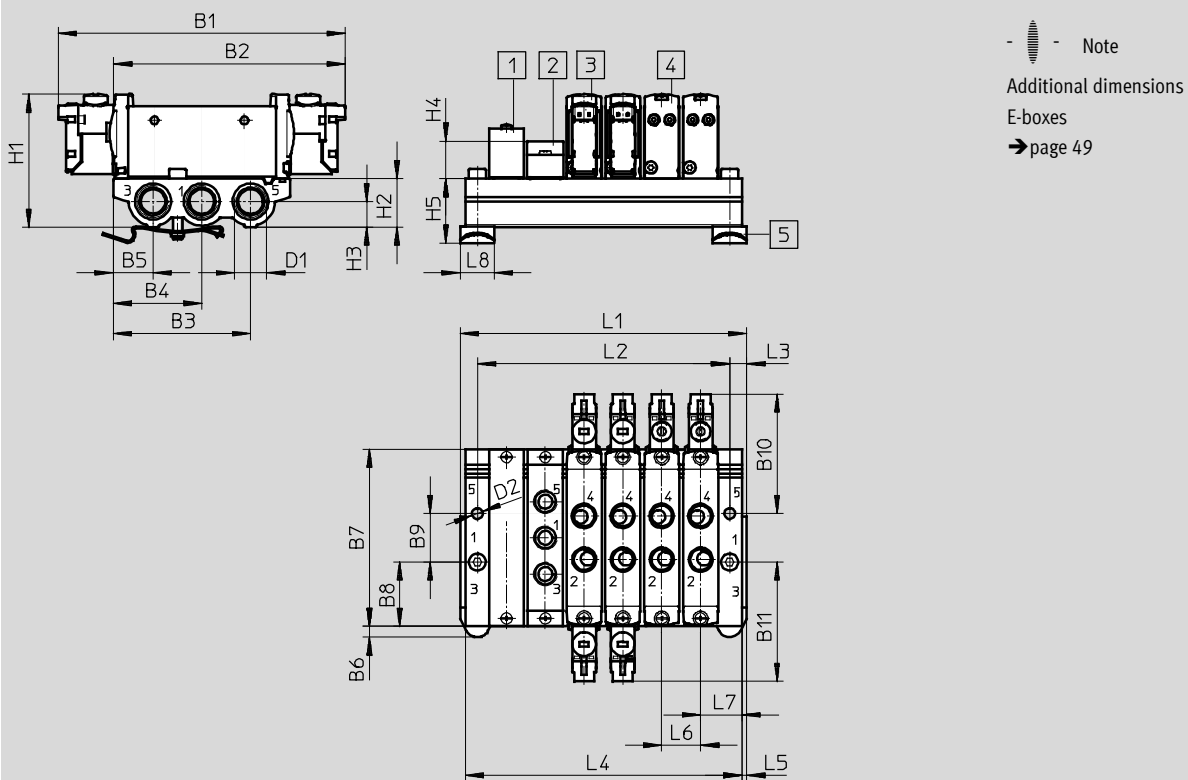

- 1 Blanking plate  
VABB-L1-14
- 2 Supply plate  
VABF-L1-14-P3A4-G18
- 3 Double solenoid valve
- 4 Single solenoid valve
- 5 H-rail mounting (two M4x25 screws to DIN 912 are required)


| Type                  | B1    | B2   | B3    | B4    | B5    | B6   | B7   | B8    | B9               | B10   | B11   | D1   |
|-----------------------|-------|------|-------|-------|-------|------|------|-------|------------------|-------|-------|------|
| VUVG-S14 -...-G18 ... | 118.3 | 95.1 | 56.55 | 36.45 | 16.35 | 4.5  | 72.9 | 26.45 | 20               | 49.15 | 49.15 | G1/8 |
|                       | D2    | H1   | H2    | H3    | H4    | H5   | L3   | L5    | L6 <sup>1)</sup> | L7    |       |      |
|                       | Ø4.5  | 54.8 | 20    | 10.6  | 15.4  | 26.4 | 7    | 2     | 16               | 17    |       |      |

| Valve positions | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10  | 12  | 14  | 16  |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| L1 [mm]         | 54  | 70  | 86  | 98  | 118 | 134 | 150 | 166 | 182 | 214 | 246 | 278 |
| L2 [mm]         | 40  | 56  | 72  | 88  | 104 | 120 | 136 | 152 | 168 | 200 | 232 | 264 |
| L4 [mm]         | 50  | 66  | 82  | 98  | 114 | 130 | 146 | 162 | 178 | 210 | 242 | 274 |
| VABM weight [g] | 118 | 159 | 200 | 241 | 282 | 323 | 364 | 405 | 446 | 528 | 610 | 692 |

1) Grid dimension

# Solenoid valves VUVG-S14, in-line valves G1/8

Ordering data





| Technical data Manifold rails   |         |                 |                         |                    |  |        |      |
|---|---------|-----------------|-------------------------|--------------------|--|--------|------|
|  | Port    | CRC             | Material <sup>2)</sup>  | Operating pressure | Max. tightening torque for assembly [Nm] |        |      |
|   | 1, 3, 5 |                 |                         | [bar]              | Valve                                    | H-rail | Wall |
|   | G1/4    | 2 <sup>1)</sup> | Wrought aluminium alloy | -0.9 ... 10        | 0.65                                     | 1.5    | 3    |

- 1) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Note on materials: RoHS-compliant

## Order code Manifold rails

|                                  |   |             |   |           |          |                           |            |   |  |
|----------------------------------|---|-------------|---|-----------|----------|---------------------------|------------|---|--|
| <b>VABM</b>                      | - | <b>L1</b>   | - | <b>14</b> | <b>S</b> | -                         | <b>G14</b> | - |  |
| Manifold assembly parts          |   |             |   |           |          | Number of valve positions |            |   |  |
| Manifold rail                    |   | <b>VABM</b> |   |           |          | 2 to 10, 12, 14 and 16    |            |   |  |
| Valve series                     |   |             |   |           |          | Ports 1, 3 and 5          |            |   |  |
| VUVG                             |   | <b>L1</b>   |   |           |          | <b>G14</b> G1/4           |            |   |  |
| Valve width                      |   |             |   |           |          |                           |            |   |  |
| 14 mm                            |   |             |   | <b>14</b> |          |                           |            |   |  |
| Manifold rail with ports 1, 3, 5 |   |             |   |           |          |                           |            |   |  |
| For G 1/8 in-line valves         |   |             |   | <b>S</b>  |          |                           |            |   |  |


## Ordering data – Accessories

|   |  |                              |  | Type                            |
|---|--|------------------------------|--|---------------------------------|
| Blanking plate  |  |                              |  | Technical data → Internet: vabb |
|  | For manifold rail for G 1/8 in-line valves | Incl. screws and seal        |  | <b>VABB-L1-14</b>               |
| Separator   |  |                              |  | Technical data → Internet: vabd |
|  | For manifold rail for G 1/8 in-line valves | Separator for pressure zones |  | <b>VABD-10-B</b>                |
| Supply plate  |  |                              |  | Technical data → Internet: vabf |
|  | For manifold rail for G 1/8 in-line valves | Incl. screws and seal        |  | <b>VABF-L1-14-P3A4-G18</b>      |
| Seals for in-line valves  |  |                              |  | Technical data → Internet: vabd |
|  | G1/8                                       | 10 seals and 20 screws       |  | <b>VABD-L1-14X-S-G18</b>        |

# Solenoid valves VUVG-B10A, sub-base valves

System overview

## Manifold assembly

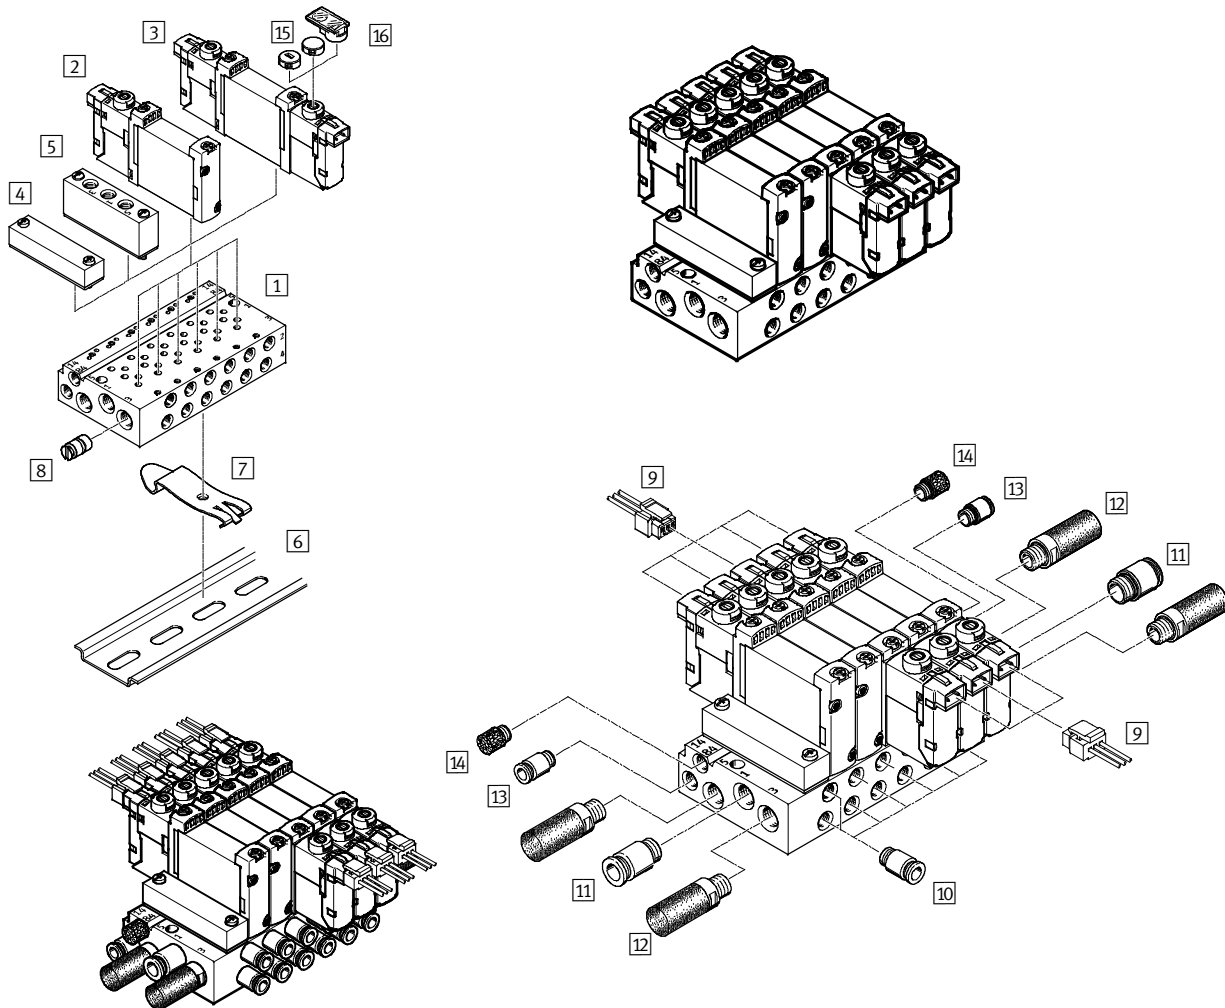

| Manifold assembly and accessories |                          |                         |   |            |
|-----------------------------------|--------------------------|-------------------------|---|------------|
|                                   | Type                     | Brief description       | → Page/Internet   |            |
| 1                                 | Manifold rail            | VABM-L1-10A ...-M7- ... | For 2 to 10, 12, 14 and 16 valve positions                                    | 36         |
| 2                                 | Solenoid valve           | VUVG- ...               | Sub-base valve, 5/2-way single solenoid                                       | 32         |
| 3                                 | Solenoid valve           | VUVG- ...               | Sub-base valve, 5/2-way double solenoid and 5/3-way valve                     | 32         |
| 4                                 | Blanking plate           | VABB-L1-10-A            | For covering an unused valve position   | 36         |
| 5                                 | Supply plate             | VABF-L1-10-P3A4- ...    | For air supply port 1 and outlet port 3 and 5                                 | 36         |
| 6                                 | H-rail                   | NRH-35-2000             | For mounting the valve manifold   | 53         |
| 7                                 | H-rail mounting          | VAME-T-M4               | 2 pieces for fitting the valve manifold on an H-rail                          | 54         |
| 8                                 | Separator                | VABD- ...               | For creating pressure zones   | 30         |
| 9                                 | Plug socket with cable   | NEBV-H1G2-KN-...-LE2    | For E-box H2 and H3   | 53         |
| 10                                | Push-in fitting          | QS...                   | Push-in fitting for outlet port 2 and 4                                       | quick star |
| 11                                | Push-in fitting          | QS...                   | Push-in fitting for air supply port 1   | quick star |
| 12                                | Silencer                 | U...                    | For outlet port 3 and 5   | 53         |
| 13                                | Push-in fitting          | QS...                   | Push-in fitting for pilot air supply port 12/14                               | quick star |
| 14                                | Silencer                 | U...                    | Silencer for pilot air outlet 82/84   | quick star |
| 15                                | Cover cap                | VMPA-HB...-B            | For manual override   | 53         |
| 16                                | Inscription label holder | ASLR-D                  | For labelling the valves, covering the mounting screw and the manual override | 55         |




# Solenoid valves VUVG-B10A, sub-base valves


Technical data

Function

- 5/2-way, single solenoid
- 5/2-way, double solenoid
- 5/3C, 5/3U, 5/3E

Circuit symbol → page 3

-  - Width 10 mm
-  - Flow rate  
90 ... 100 l/min
-  - Voltage  
5, 12 and 24 V DC

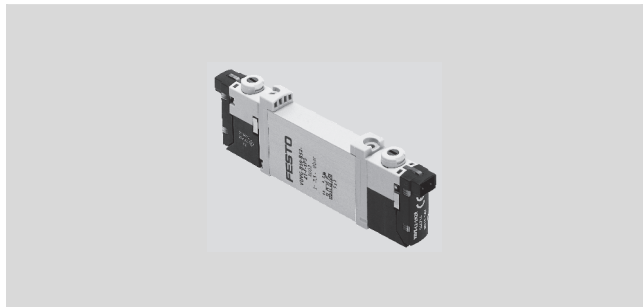

| General technical data         |  |                     |            |                 |                 |                 |
|--------------------------------|--|---------------------|------------|-----------------|-----------------|-----------------|
| Valve function                 | 5/2-way  |                     | 5/2-way M  | 5/3-way         |                 |                 |
| Normal position                | -  | -                   | -          | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |
| Stable position                | Monostable                                       | Bistable            | Monostable | Monostable      |                 |                 |
| Pneumatic spring reset method  | Yes <sup>5)</sup>                                | -                   | No         | No              |                 |                 |
| Mechanical spring reset method | Yes <sup>5)</sup>                                | -                   | Yes        | Yes             |                 |                 |
| Vacuum operation at port 1     | Only with external pilot air supply              |                     |            |                 |                 |                 |
| Design                         | Piston spool valve                               |                     |            |                 |                 |                 |
| Sealing principle              | Soft   |                     |            |                 |                 |                 |
| Actuation type                 | Electric   |                     |            |                 |                 |                 |
| Type of control                | Piloted  |                     |            |                 |                 |                 |
| Pilot air supply               | External, internal; can be selected via sub-base |                     |            |                 |                 |                 |
| Exhaust function               | With flow control                                |                     |            |                 |                 |                 |
| Manual override                | Choice of non-detenting, detenting or covered    |                     |            |                 |                 |                 |
| Type of mounting               | On manifold rail                                 |                     |            |                 |                 |                 |
| Mounting position              | Any  |                     |            |                 |                 |                 |
| Nominal size                   | [mm]   | 2                   | 1.4        | 2               |                 |                 |
| Standard nominal flow rate     | [l/min]  | 100                 | 80         | 90              |                 |                 |
| Flow rate on manifold rail M3  | [l/min]  | 100                 | 80         | 90              |                 |                 |
| Switching time on/off          | [ms]   | 7/15                | -          | 7/21            | 8/25            |                 |
| Changeover time                | [ms]   | -                   | 5          | -               | 14              |                 |
| Width                          | [mm]   | 10                  |            |                 |                 |                 |
| Port                           | 1, 3, 5  | M7 in manifold rail |            |                 |                 |                 |
|                                | 2, 4   | M5 in manifold rail |            |                 |                 |                 |
|                                | 12/14, 82/84                                     | M5 in manifold rail |            |                 |                 |                 |
| Product weight                 | [g]  | 38                  | 49         | 37              | 49              |                 |
| Corrosion resistance class     | CRC  | 2 <sup>6)</sup>     |            |                 |                 |                 |

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

5) Combined reset method

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.



# Solenoid valves VUVG-B10A, sub-base valves

Technical data

| Operating and environmental conditions                  |  |       |   |                          |            |             |
|---|--|-------|---|--------------------------|------------|-------------|
| Valve function  |  |       | 5/2-way, single solenoid                              | 5/2-way, double solenoid | 5/2-way M  | 5/3-way     |
| Operating medium  | Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated |       |   |                          |            |             |
| Operating pressure at port 1 with pilot air supply      | Internal   | [bar] | 2.5 ... 8   | 1.5 ... 8                | 3 ... 8    |             |
|   | External   | [bar] | -0.9 ... 10   |                          | -0.9 ... 8 | -0.9 ... 10 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external   | [bar] | -0.9 ... 10   |                          | -0.9 ... 8 | -0.9 ... 10 |
|   |  | [bar] | 2.5 ... 8   | 1.5 ... 8                | 2 ... 8    | 3 ... 8     |
| Pilot pressure <sup>1)</sup>                            |  | [bar] | -5 ... +50, -5 ... +60 with holding current reduction |                          |            |             |
| Ambient temperature                                     |  | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |                          |            |             |
| Temperature of medium                                   |  | [°C]  | -5 ... +50, -5 ... +60 with holding current reduction |                          |            |             |

1) Minimum pilot pressure 50% of operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage [V DC]     | 5, 12 and 24 ±10%                                 |
| Power [W]                    | 1, reduced to 0.35 with holding current reduction |
| Duty cycle [%]               | 100   |
| Protection class to EN 60529 | IP40 (with plug socket), IP65 (with M8)           |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

### Dimensions

5/2-way and 5/3-way valve

1 Vertical electrical connection      2 Manual override





















Download CAD data → [www.festo.com](http://www.festo.com)

- - Note  
Additional dimensions  
E-boxes  
→ page 49

| Type                | B1   | H1   | L1   | L2   | L3 | L4   | L5   | L6   | L7   |
|---------------------|------|------|------|------|----|------|------|------|------|
| VUVG-B10A-...-F ... | 10.2 | 32.5 | 73.9 | 68.9 | 8  | 4.85 | 6.15 | 56.9 | 54.4 |

# Solenoid valves VUVG-B10A, sub-base valves

Order code

|  |   |   |     |   |   |   |   |   |   |  |   |   |   |
|--|---|---|-----|---|---|---|---|---|---|--|---|---|---|
| VUVG   | - | B | 10A | - | - | Z | - | F | - | -  | - | L   | - |
| <b>Valve design</b><br> <p>Sub-base, manifold valve incl. seal and screws</p> |   |   |     |   |   |   |   |   |   |  |   |   |   |
| <b>Width</b><br>10 mm <span style="float: right;">10A</span>   |   |   |     |   |   |   |   |   |   |  |   |   |   |
| <b>Valve functions</b>   |   |   |     |   |   |   |   |   |   |  |   |   |   |
|   |   |   |     |   |   |   |   |   |   | M52  |   |   |   |
|   |   |   |     |   |   |   |   |   |   | B52  |   |   |   |
|    |   |   |     |   |   |   |   |   |   | P53C   |   |   |   |
|   |   |   |     |   |   |   |   |   |   | P53U   |   |   |   |
|   |   |   |     |   |   |   |   |   |   | P53E   |   |   |   |
| <b>Reset method</b>  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| Mech. spring for M52   |   |   |     |   |   |   |   |   |   | M  |   |   |   |
| Pneu./mech. spring for M52   |   |   |     |   |   |   |   |   |   | R  |   |   |   |
| With B52 and P53   |   |   |     |   |   |   |   |   |   | -  |   |   |   |
| <b>Pilot air supply</b>  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| External   |   |   |     |   |   |   |   |   |   | Z  |   |   |   |
| <b>Manual override</b>   |   |   |     |   |   |   |   |   |   |  |   |   |   |
|  Non-detenting  |   |   |     |   |   |   |   |   |   | H  |   |   |   |
|  Covered  |   |   |     |   |   |   |   |   |   | S  |   |   |   |
| - Non-detenting, detenting   |   |   |     |   |   |   |   |   |   | T  |   |   |   |
| <b>Connecting cable</b>  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| W1...4 <sup>1)</sup> Not sheathed  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| C1...4 <sup>1)</sup> Sheathed  |   |   |     |   |   |   |   |   |   | for H  |   |    |   |
| WS1...4 <sup>1)</sup> Not sheathed   |   |   |     |   |   |   |   |   |   | for S  |   |    |   |
| S1...4 <sup>1)</sup> Sheathed  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| N1...4 <sup>6)</sup> M8x1, 3-pin   |   |   |     |   |   |   |   |   |   |  |   |    |   |
| N5...8 <sup>6)</sup> M8x1, 4-pin   |   |   |     |   |   |   |   |   |   |  |   |    |   |
| <b>Display</b>   |   |   |     |   |   |   |   |   |   |  |   |   |   |
| L LED  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| <b>Protective circuit</b>  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| -  |   |   |     |   |   |   |   |   |   | Without holding current reduction (HCR)                        |   | 1   |   |
| R <sup>2)</sup>  |   |   |     |   |   |   |   |   |   | With holding current reduction (HCR)                           |   | 1 to 0.35   |   |
| <b>E-box</b>   |   |   |     |   |   |   |   |   |   |  |   |   |   |
| H2   |   |   |     |   |   |   |   |   |   | Connection pattern H, horizontal plug                          |   |    |   |
| H3   |   |   |     |   |   |   |   |   |   | Connection pattern H, vertical plug                            |   |   |   |
| S2   |   |   |     |   |   |   |   |   |   | Connection pattern S, horizontal plug                          |   |  |   |
| S3   |   |   |     |   |   |   |   |   |   | Connection pattern S, vertical plug                            |   |  |   |
| L1...4   |   |   |     |   |   |   |   |   |   | With 2x flying leads L: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m |   |  |   |
| K6...9   |   |   |     |   |   |   |   |   |   | Cable: K6 = 0.5 m, K7 = 1 m, K8 = 2.5 m, K9 = 5 m              |   |  |   |
| R1   |   |   |     |   |   |   |   |   |   | Individual plug M8, 4-pin                                      |   |   |   |
| R8   |   |   |     |   |   |   |   |   |   | Individual plug M8, 3-pin                                      |   |  |   |
| P3   |   |   |     |   |   |   |   |   |   | Without E-box  |   |  |   |
| <b>Operating voltage</b>   |   |   |     |   |   |   |   |   |   |  |   |   |   |
| 1  |   |   |     |   |   |   |   |   |   | 24 V DC  |   |   |   |
| 5  |   |   |     |   |   |   |   |   |   | 12 V DC  |   |   |   |
| 4  |   |   |     |   |   |   |   |   |   | 5 V DC   |   |   |   |
| <b>Pneumatic connection</b>  |   |   |     |   |   |   |   |   |   |  |   |   |   |
| F  |   |   |     |   |   |   |   |   |   | In the manifold rail   |   |   |   |

1) W1/C1/S1/WS1 = 0.5 m, W2/C2/S2/WS2 = 1 m, W3/C3/S3/WS3 = 2.5 m, W4/C4/S4/WS4 = 5 m  
 2) At 24 V DC

3) If Q... is chosen for the pneumatic connection, this also applies to the exhaust ports 3 and 5


6) Straight: N1/N5 = 2.5 m, N2/N6 = 5 m  
 Angled: N3/N7 = 2.5 m, N4/N8 = 5 m

# Solenoid valves VUVG-B10A, sub-base valves

Manifold assembly




Sub-base valve for manifold assembly  
M5 connection

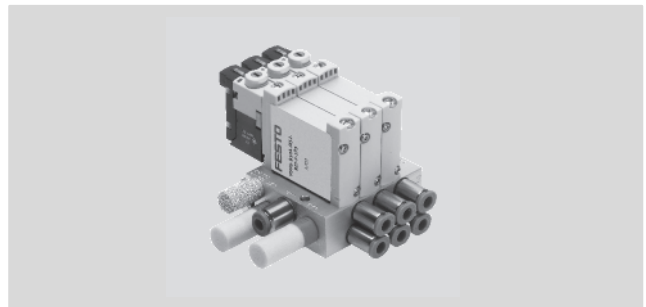

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

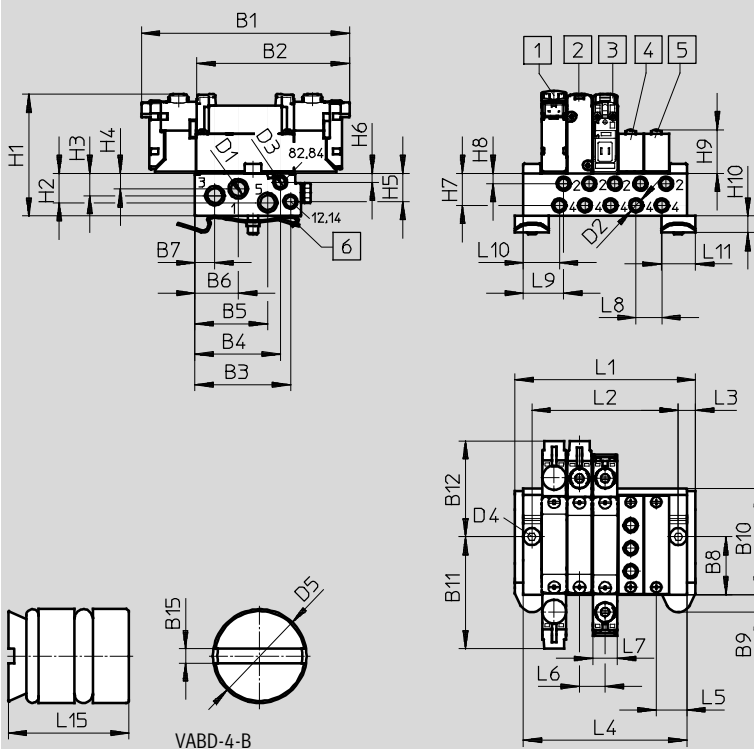

Note  
Additional dimensions  
E-boxes  
→ page 49


- 1 Solenoid valve
- 2 Solenoid valve
- 3 Solenoid valve
- 4 Supply plate
- 5 Blanking plate
- 6 H-rail mounting (two screws M4x25 to DIN 912 are required)

| Type                  | B1   | B2   | B3    | B4    | B5    | B6    | B7   | B8   | B9   | B10  | B11   | B12   |
|-----------------------|------|------|-------|-------|-------|-------|------|------|------|------|-------|-------|
| VUVG-B10A -...-F- ... | 84.9 | 62.4 | 39.12 | 34.95 | 29.83 | 17.75 | 8.15 | 24   | 7.15 | 43.5 | 45.75 | 39.15 |
|                       | B15  | D1   | D2    | D3    | D4    | D5    | H1   | H2   | H3   | H4   | H5    | H6    |
|                       | 0.48 | M7   | M5    | M5    | Ø4.5  | Ø4    | 53.1 | 12   | 9.1  | 6.3  | 11.57 | 3.6   |
|                       | H7   | H8   | H9    | H10   | H15   | L3    | L5   | L6   | L7   | L8   | L9    | L10   |
|                       | 13.1 | 4.2  | 16.2  | 6.8   | 1.9   | 7     | 12.5 | 10.5 | 10.2 | 10.5 | 16.5  | 14.7  |
|                       | L11  | L15  |       |       |       |       |      |      |      |      |       |       |
|                       | 14   | 8.5  |       |       |       |       |      |      |      |      |       |       |

| Valve positions | 2    | 3  | 4    | 5   | 6    | 7   | 8     | 9   | 10    | 12    | 14    | 16    |
|-----------------|------|----|------|-----|------|-----|-------|-----|-------|-------|-------|-------|
| L1 [mm]         | 42.5 | 53 | 63.5 | 74  | 84.5 | 96  | 106.5 | 116 | 126.5 | 147.5 | 168.5 | 189.5 |
| L2 [mm]         | 28.5 | 39 | 49.5 | 60  | 70.5 | 81  | 91.5  | 102 | 112.5 | 133.5 | 154.5 | 175.5 |
| L4 [mm]         | 35.5 | 46 | 56.5 | 67  | 77.5 | 89  | 99.5  | 109 | 119.5 | 140.5 | 161.5 | 182.5 |
| VABM weight [g] | 60   | 78 | 96   | 114 | 132  | 150 | 168   | 186 | 204   | 240   | 276   | 312   |

# Solenoid valves VUVG-B10A, sub-base valves

Ordering data

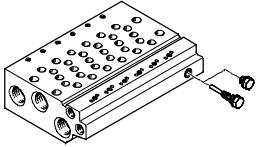



| Technical data Manifold rails <sup>1)</sup>                                       |      |         |                 |                 |                         |                             |  |        |      |
|---|------|---------|-----------------|-----------------|-------------------------|-----------------------------|--|--------|------|
|   | Port |         |                 | CRC             | Material <sup>3)</sup>  | Operating pressure<br>[bar] | Max. tightening torque for assembly [Nm] |        |      |
|   | 2, 4 | 1, 3, 5 | 12/14,<br>82/84 |                 |                         |                             | Valve                                    | H-rail | Wall |
|  | M5   | M7      | M5              | 2 <sup>2)</sup> | Wrought aluminium alloy | -0.9 ... 10                 | 0.45                                     | 1.5    | 1.5  |

- 1) Blanking plugs are included with the manifold rail.
- 2) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 3) Note on materials: RoHS-compliant

## Order code Manifold rails M3

|   |   |             |   |            |   |                  |    |                           |
|---|---|-------------|---|------------|---|------------------|----|---------------------------|
| <b>VABM</b>                                 | - | <b>L1</b>   | - | <b>10A</b> | - | <b>M7</b>        | -  |                           |
| Manifold assembly parts                     |   |             |   |            |   |                  |    | Number of valve positions |
| Manifold rail                               |   | <b>VABM</b> |   |            |   |                  |    | 2 to 10, 12, 14 and 16    |
| Valve series                                |   |             |   |            |   | Ports 1, 3 and 5 |    |                           |
| VUVG  |   | <b>L1</b>   |   |            |   | <b>M7</b>        | M7 |                           |
| Valve width                                 |   |             |   |            |   |                  |    |                           |
| 10 mm                                       |   |             |   | <b>10A</b> |   |                  |    |                           |
| Rail with ports 1, 2, 3, 4, 5, 12/14, 82/84 |   |             |   |            |   |                  |    |                           |
| Port 2 and 4 in M5                          |   |             |   |            |   |                  |    |                           |
|   |   |             |   |            |   |                  |    | <b>W</b>                  |


## Ordering data – Accessories

|   |                          |                              | Type                            |
|---|--------------------------|------------------------------|---------------------------------|
| Blanking plate  |                          |                              | Technical data → Internet: vabb |
|  | For manifold rail 10AW   | Incl. screws and seal        | <b>VABB-L1-10A</b>              |
| Separator   |                          |                              | Technical data → Internet: vabd |
|  | For manifold rail 10AW   | Separator for pressure zones | <b>VABD-4.2-B</b>               |
| Supply plate  |                          |                              | Technical data → Internet: vabf |
|  | For manifold rail 10AW   | Incl. screws and seal        | <b>VABF-L1-10A-P3A4-M5</b>      |
| Seals   |                          |                              | Technical data → Internet: vabd |
|  | For sub-base valves B10A | 10 seals and 20 screws       | <b>VABD-L1-10AB-S-M3</b>        |

# Solenoid valves VUVG-B10, sub-base valves

System overview

## Manifold assembly

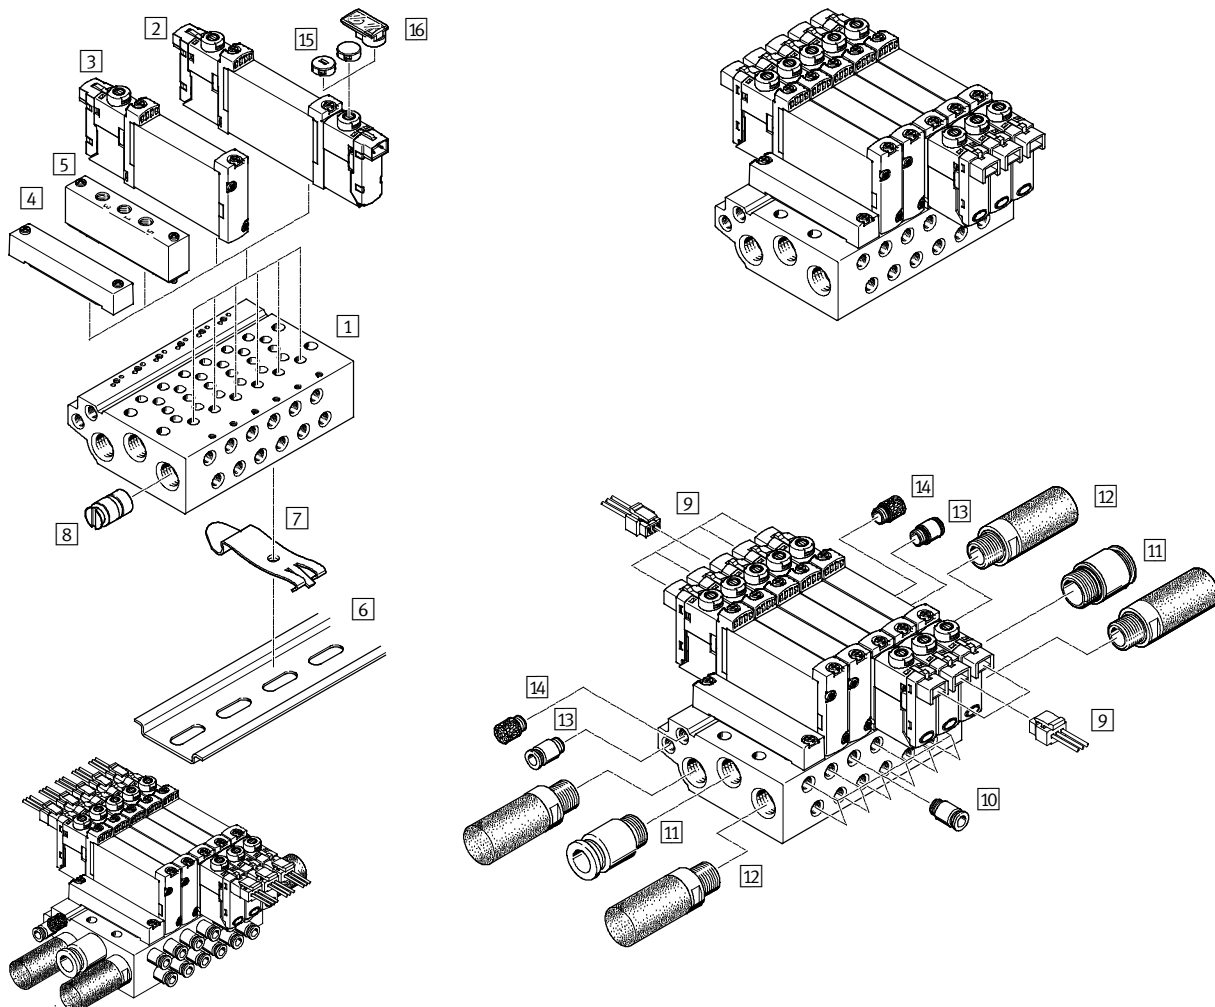

| Manifold assembly and accessories |                          |                         |   |            |
|-----------------------------------|--------------------------|-------------------------|---|------------|
|                                   | Type                     | Brief description       | → Page/Internet   |            |
| 1                                 | Manifold rail            | VABM-L1-10 ...-G18- ... | For 2 to 10, 12, 14 and 16 valve positions                                    | 42         |
| 2                                 | Solenoid valve           | VUVG- ...               | Sub-base valve, 5/2-way single solenoid                                       | 38         |
| 3                                 | Solenoid valve           | VUVG- ...               | Sub-base valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way valve          | 38         |
| 4                                 | Blanking plate           | VABB-L1-10-W            | For covering an unused valve position   | 42         |
| 5                                 | Supply plate             | VABF-L1-10-P3A4- ...    | For air supply port 1 and outlet port 3 and 5                                 | 42         |
| 6                                 | H-rail                   | NRH-35-2000             | For mounting the valve manifold   | 53         |
| 7                                 | H-rail mounting          | VAME-T-M4               | 2 pieces for fitting the valve manifold on an H-rail                          | 53         |
| 8                                 | Separator                | VABD- ...               | For creating pressure zones   | 42         |
| 9                                 | Plug socket with cable   | NEBV-H1G2-KN-...-LE2    | For E-box H2 and H3   | 53         |
| 10                                | Push-in fitting          | QS...                   | Push-in fitting for outlet port 2 and 4                                       | quick star |
| 11                                | Push-in fitting          | QS...                   | Push-in fitting for air supply port 1   | quick star |
| 12                                | Silencer                 | U...                    | For outlet port 3 and 5   | 53         |
| 13                                | Push-in fitting          | QS...                   | Push-in fitting for pilot air supply port 12/14                               | quick star |
| 14                                | Silencer                 | U...                    | Silencer for pilot air outlet 82/84   | quick star |
| 15                                | Cover cap                | VMPA-HB...-B            | For manual override   | 53         |
| 16                                | Inscription label holder | ASLR-D                  | For labelling the valves, covering the mounting screw and the manual override | 55         |

# Solenoid valves VUVG-B10, sub-base valves






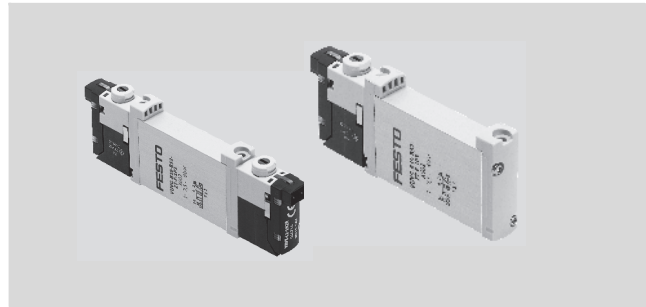
## Technical data

### Function

2x3/2C, 2x3/2U, 2x3/2H  
 5/2-way, single solenoid  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

Circuit symbol → page 3

-  - Width 10 mm
-  - Flow rate  
160 ... 270 l/min
-  - Voltage  
5, 12 and 24 V DC



| General technical data                |  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
|---------------------------------------|--|-----------------|-----------------|-------------------------------------|-----------------|-----------------|-------------------|----------|------------|-----------------|-----------------|-----------------|
| Valve function                        | 2x3/2-way  |                 |                 | 2x3/2-way M                         |                 |                 | 5/2-way           |          | 5/2-way M  | 5/3-way         |                 |                 |
| Normal position                       | C <sup>1)</sup>                                  | U <sup>2)</sup> | H <sup>4)</sup> | C <sup>1)</sup>                     | U <sup>2)</sup> | H <sup>4)</sup> | -                 | -        | -          | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |
| Stable position                       | Monostable                                       |                 |                 |                                     |                 |                 |                   | Bistable | Monostable | Monostable      |                 |                 |
| Pneumatic spring reset method         | Yes  |                 |                 | No                                  |                 |                 | Yes <sup>5)</sup> | -        | No         | No              |                 |                 |
| Mechanical spring reset method        | No   |                 |                 | Yes                                 |                 |                 | Yes <sup>5)</sup> | -        | Yes        | Yes             |                 |                 |
| Vacuum operation at port 1            | No   |                 |                 | Only with external pilot air supply |                 |                 |                   |          |            |                 |                 |                 |
| Design                                | Piston spool valve                               |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Sealing principle                     | Soft   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Actuation type                        | Electric   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Type of control                       | Piloted  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Pilot air supply                      | External, internal; can be selected via sub-base |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Exhaust function                      | With flow control                                |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Manual override                       | Choice of non-detenting, detenting or covered    |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Type of mounting                      | On manifold rail                                 |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Mounting position                     | Any  |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Nominal size [mm]                     | 2.7  |                 |                 | 1.8                                 | 1.7             |                 | 4                 |          | 2.3        |                 | 3.5             |                 |
| Standard nominal flow rate [l/min]    | 170  |                 |                 | 150                                 | 140             | 140             | 330               |          | 285        |                 | 300             |                 |
| Flow rate on manifold rail M5 [l/min] | 150  |                 |                 | 130                                 | 120             | 120             | 210               |          | 180        |                 | 200             |                 |
| Flow rate on manifold rail M7 [l/min] | 160  |                 |                 | 140                                 | 130             | 130             | 270               |          | 230        |                 | 250             |                 |
| Switching time on/off [ms]            | 6/16   |                 |                 | 8/11                                |                 |                 | 7/19              | -        | 8/24       |                 | 10/30           |                 |
| Changeover time [ms]                  | -  |                 |                 |                                     |                 |                 |                   | 7        |            | 16              |                 |                 |
| Width [mm]                            | 10   |                 |                 |                                     |                 |                 |                   |          |            |                 |                 |                 |
| Port                                  | 1, 3, 5  |                 |                 | G1/8 in manifold rail               |                 |                 |                   |          |            |                 |                 |                 |
|                                       | 2, 4   |                 |                 | M5 or M7 in manifold rail           |                 |                 |                   |          |            |                 |                 |                 |
|                                       | 12/14, 82/84                                     |                 |                 | M5 in manifold rail                 |                 |                 |                   |          |            |                 |                 |                 |
| Product weight [g]                    | 55   |                 |                 | 54                                  |                 |                 | 45                | 55       | 44         |                 | 55              |                 |
| Corrosion resistance class            | CRC  |                 |                 | 2 <sup>6)</sup>                     |                 |                 |                   |          |            |                 |                 |                 |

- 1) C = Normally closed
- 2) U = Normally open
- 3) E = Normally exhausted
- 4) H = 2x3/2-way valve in one housing with 1x normally closed and 1x normally open
- 5) Combined reset method
- 6) Corrosion resistance class 2 according to Festo standard 940 070  
 Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

# Solenoid valves VUVG-B10, sub-base valves

Technical data

| Operating and environmental conditions                  |  |             |   |                          |           |            |             |
|---|--|-------------|---|--------------------------|-----------|------------|-------------|
| Valve function  | 2x3/2-way  | 2x3/2-way M | 5/2-way, single solenoid                              | 5/2-way, double solenoid | 5/2-way M | 5/3-way    |             |
| Operating medium  | Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated |             |   |                          |           |            |             |
| Operating pressure at port 1 with pilot air supply      | Internal   | [bar]       | 1.5 ... 8   | 3 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
|   | External   | [bar]       | 1.5 ... 10  | -0.9 ... 10              |           |            | -0.9 ... 10 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external   | [bar]       | -0.9 ... 10   |                          |           | -0.9 ... 8 | -0.9 ... 10 |
|   |  | [bar]       | 1.5 ... 8   | 2 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
| Pilot pressure <sup>1)</sup>                            |  | [bar]       | 1.5 ... 8   | 2 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
| Ambient temperature                                     |  | [°C]        | -5 ... +50, -5 ... +60 with holding current reduction |                          |           |            |             |
| Temperature of medium                                   |  | [°C]        | -5 ... +50, -5 ... +60 with holding current reduction |                          |           |            |             |

1) Minimum pilot pressure 50% of operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage [V DC]     | 5, 12 and 24 ±10%                                 |
| Power [W]                    | 1, reduced to 0.35 with holding current reduction |
| Duty cycle [%]               | 100   |
| Protection class to EN 60529 | IP40 (with plug socket)                           |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

### Dimensions

2x3/2-way, 5/2-way and 5/3-way valve

1 Vertical electrical connection      2 Horizontal electrical connection      3 Manual override



























Download CAD data → [www.festo.com](http://www.festo.com)

- - Note  
Additional dimensions  
E-boxes  
→ page 49

| Type                | B1   | H1   | H2  | L1   | L2   | L3 | L4   | L5   | L6   | L7   |
|---------------------|------|------|-----|------|------|----|------|------|------|------|
| VUVG-B10 -...-F ... | 10.2 | 32.5 | 3.6 | 86.5 | 81.5 | 8  | 4.85 | 6.15 | 69.2 | 66.7 |

# Solenoid valves VUVG-B10, sub-base valves

Order code

|  |   |   |    |   |   |   |   |   |   |   |   |   |   |
|--|---|---|----|---|---|---|---|---|---|---|---|---|---|
| VUVG   | - | B | 10 | - | - | Z | - | F | - | -   | - | L | - |
| <b>Valve design</b><br> <p>Sub-base, manifold valve incl. seal and screws</p> |   |   |    |   |   |   |   |   |   |   |   |   |   |
| <b>Width</b><br>10 mm <span style="float: right;">10</span>  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| <b>Valve functions</b>   |   |   |    |   |   |   |   |   |   |   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | T32C  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | T32U  |   |   |   |
|    |   |   |    |   |   |   |   |   |   | T32H  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | M52   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | B52   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | P53C  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | P53U  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | P53E  |   |   |   |
| <b>Reset method</b>  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| Pneumatic spring for T32   |   |   |    |   |   |   |   |   |   | A   |   |   |   |
| Mechanical spring for T32 and M52  |   |   |    |   |   |   |   |   |   | M   |   |   |   |
| Pneu./mech. spring for M52   |   |   |    |   |   |   |   |   |   | R   |   |   |   |
| With B52 and P53   |   |   |    |   |   |   |   |   |   | -   |   |   |   |
| <b>Pilot air supply</b>  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| External   |   |   |    |   |   |   |   |   |   | Z   |   |   |   |
| <b>Manual override</b>   |   |   |    |   |   |   |   |   |   |   |   |   |   |
|  Non-detenting  |   |   |    |   |   |   |   |   |   | H   |   |   |   |
|  Covered  |   |   |    |   |   |   |   |   |   | S   |   |   |   |
| - Non-detenting, detenting   |   |   |    |   |   |   |   |   |   | T   |   |   |   |
| <b>Connecting cable</b>  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| W1...4 <sup>1)</sup> Not sheathed  |   |   |    |   |   |   |   |   |   |    |   |   |   |
| C1...4 <sup>1)</sup> Sheathed for H  |   |   |    |   |   |   |   |   |   |    |   |   |   |
| WS1...4 <sup>1)</sup> Not sheathed for S   |   |   |    |   |   |   |   |   |   |    |   |   |   |
| S1...4 <sup>1)</sup> Sheathed  |   |   |    |   |   |   |   |   |   |    |   |   |   |
| N1...4 <sup>6)</sup> M8x1, 3-pin   |   |   |    |   |   |   |   |   |   |    |   |   |   |
| N5...8 <sup>6)</sup> M8x1, 4-pin   |   |   |    |   |   |   |   |   |   |    |   |   |   |
| <b>Display</b>   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| L LED  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| <b>Protective circuit</b>  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| - Without holding current reduction (HCR)  |   |   |    |   |   |   |   |   |   | Power [W]<br>1  |   |   |   |
| R <sup>2)</sup> With holding current reduction (HCR)   |   |   |    |   |   |   |   |   |   | 1 to 0.35   |   |   |   |
| <b>E-box</b>   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| H2 Connection pattern H, horizontal plug   |   |   |    |   |   |   |   |   |   |    |   |   |   |
| H3 Connection pattern H, vertical plug   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| S2 Connection pattern S, horizontal plug   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| S3 Connection pattern S, vertical plug   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| L1...4 With 2x flying leads L: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| K6...9 Cable: K6 = 0.5 m, K7 = 1 m, K8 = 2.5 m, K9 = 5 m   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| R1 Individual plug M8, 4-pin   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| R8 Individual plug M8, 3-pin   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| P3 Without E-box   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| <b>Operating voltage</b>   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| 1 24 V DC  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| 5 12 V DC  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| 4 5 V DC   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| <b>Pneumatic connection</b>  |   |   |    |   |   |   |   |   |   |   |   |   |   |
| F In the manifold rail   |   |   |    |   |   |   |   |   |   |   |   |   |   |

1) W1/C1/S1/WS1 = 0.5 m, W2/C2/S2/WS2 = 1 m, W3/C3/S3/WS3 = 2.5 m, W4/C4/S4/WS4 = 5 m  
 2) At 24 V DC

3) If Q... is chosen for the pneumatic connection, this also applies to the exhaust ports 3 and 5

6) Straight: N1/N5 = 2.5 m, N2/N6 = 5 m  
 Angled: N3/N7 = 2.5 m, N4/N8 = 5 m




# Solenoid valves VUVG-B10, sub-base valves

Manifold assembly






Sub-base valve for manifold assembly  
M5 or M7 connection

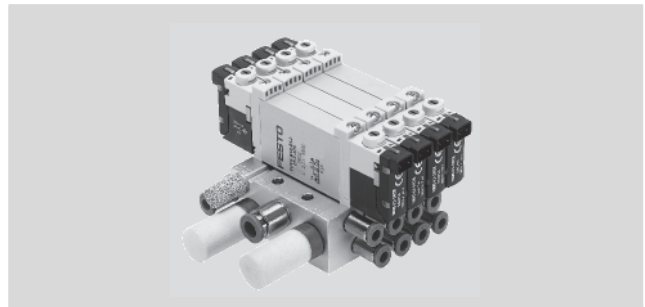

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

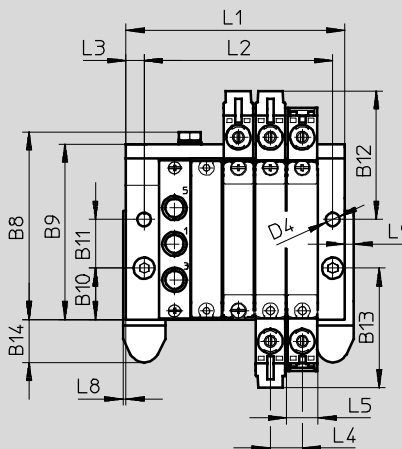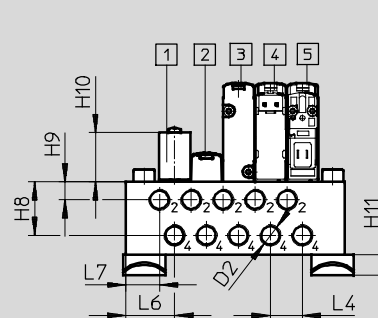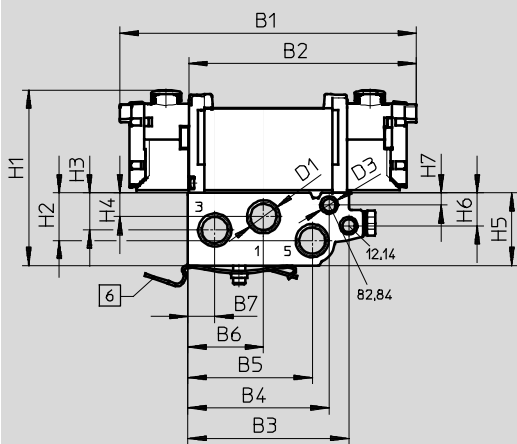

Note  
Additional dimensions  
E-boxes  
→ page 49


- 1 Supply plate
- 2 Blanking plate
- 3 Solenoid valve
- 4 Solenoid valve
- 5 Solenoid valve
- 6 H-rail mounting (two M4x30 screws to DIN 912 are required)

| Type                 |      |       |      |      |       |      |     |    |      |      |       |      |
|----------------------|------|-------|------|------|-------|------|-----|----|------|------|-------|------|
| VUVG-B10 -...-F- ... | B1   | B2    | B3   | B4   | B5    | B6   | B7  | B8 | B9   | B10  | B11   | B12  |
|                      | 97.5 | 74.8  | 52.9 | 46.5 | 40.9  | 24.9 | 8.9 | 62 | 57.7 | 16.9 | 16    | 42.2 |
|                      | B13  | B14   | B15  | D1   | D2    | D3   | D4  | D5 | H1   | H2   | H3    | H4   |
|                      | 39.3 | 14.05 | 1.2  | G1/8 | M5/M7 | M5   | 4.5 | ∅6 | 56.4 | 15.7 | 12.17 | 7.87 |
|                      | H5   | H6    | H7   | H8   | H9    | H10  | H11 | L3 | L4   | L5   | L6    | L7   |
|                      | 23.9 | 10.8  | 4    | 17.6 | 5.9   | 16.2 | 6.8 | 4  | 10.5 | 10.2 | 16    | 11   |
| L8                   | L9   | L15   |      |      |       |      |     |    |      |      |       |      |
|                      | 1    | 3     | 10   |      |       |      |     |    |      |      |       |      |

| Valve positions | 2    | 3   | 4    | 5   | 6    | 7   | 8     | 9   | 10    | 12    | 14    | 16    |
|-----------------|------|-----|------|-----|------|-----|-------|-----|-------|-------|-------|-------|
| L1 [mm]         | 40.5 | 51  | 61.5 | 72  | 82.5 | 93  | 103.5 | 114 | 124.5 | 145.5 | 166.5 | 187.5 |
| L2 [mm]         | 30.5 | 41  | 51.5 | 62  | 72.5 | 83  | 93.5  | 104 | 114.5 | 135.5 | 156.5 | 177.5 |
| VABM weight [g] | 107  | 135 | 163  | 191 | 219  | 247 | 275   | 303 | 331   | 387   | 415   | 471   |

# Solenoid valves VUVG-B10, sub-base valves

Ordering data

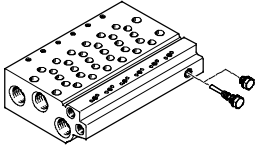



| Technical data Manifold rails <sup>1)</sup>                                       |             |         |                 |                 |                               |                             |  |        |      |
|---|-------------|---------|-----------------|-----------------|-------------------------------|-----------------------------|--|--------|------|
|   | Port        |         |                 | CRC             | Material <sup>3)</sup>        | Operating pressure<br>[bar] | Max. tightening torque for assembly [Nm] |        |      |
|   | 2, 4        | 1, 3, 5 | 12/14,<br>82/84 |                 |                               |                             | Valve                                    | H-rail | Wall |
|  | M5 or<br>M7 | G1/8    | M5              | 2 <sup>2)</sup> | Wrought<br>aluminium<br>alloy | -0.9 ... 10                 | 0.45                                     | 1.5    | 3    |

- 1) Blanking plugs are included with the manifold rail.
- 2) Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 3) Note on materials: RoHS-compliant

## Order code Manifold rails M5 and M7

|  |                  |           |   |   |   |            |   |  |
|--|------------------|-----------|---|---|---|------------|---|--|
| <b>VABM</b>  | -                | <b>L1</b> | - | <b>10</b>   | - | <b>G18</b> | - |  |
| Manifold assembly parts                              |                  |           |   |   |   |            |   |  |
| Manifold rail  | <b>VABM</b>      |           |   | Number of valve positions<br>2 to 10, 12, 14 and 16 |   |            |   |  |
| Valve series   | Ports 1, 3 and 5 |           |   |   |   |            |   |  |
| VUVG   | <b>L1</b>        |           |   | <b>G18</b> G1/8                                     |   |            |   |  |
| Valve width  |                  |           |   |   |   |            |   |  |
| 10 mm  | <b>10</b>        |           |   |   |   |            |   |  |
| Manifold rail with ports 1, 2, 3, 4, 5, 12/14, 82/84 |                  |           |   |   |   |            |   |  |
| Port 2 and 4 in M5                                   | <b>W</b>         |           |   |   |   |            |   |  |
| Port 2 and 4 in M7                                   | <b>HW</b>        |           |   |   |   |            |   |  |


## Ordering data – Accessories

|   |  |                              | Type                      |
|---|--|------------------------------|---------------------------|
| Blanking plate <span style="float: right;">Technical data → Internet: vabb</span>   |  |                              |                           |
|  | For manifold rail 10W/10HW,<br>sub-base valves     | Incl. screws and seal        | <b>VABB-L1-10-W</b>       |
| Separator <span style="float: right;">Technical data → Internet: vabd</span>        |  |                              |                           |
|  | For manifold rail 10W and 10HW,<br>sub-base valves | Separator for pressure zones | <b>VABD-6-B</b>           |
| Supply plate <span style="float: right;">Technical data → Internet: vabf</span>     |  |                              |                           |
|  | For manifold rail 10W                              | Incl. screws and seal        | <b>VABF-L1-10-P3A4-M5</b> |
|   | For manifold rail 10HW                             |                              | <b>VABF-L1-10-P3A4-M7</b> |
| Seals <span style="float: right;">Technical data → Internet: vabd</span>            |  |                              |                           |
|  | For sub-base valves B10                            | 10 seals and 20 screws       | <b>VABD-L1-10B-S-M7</b>   |

# Solenoid valves VUVG-B14, sub-base valves

System overview

## Manifold assembly

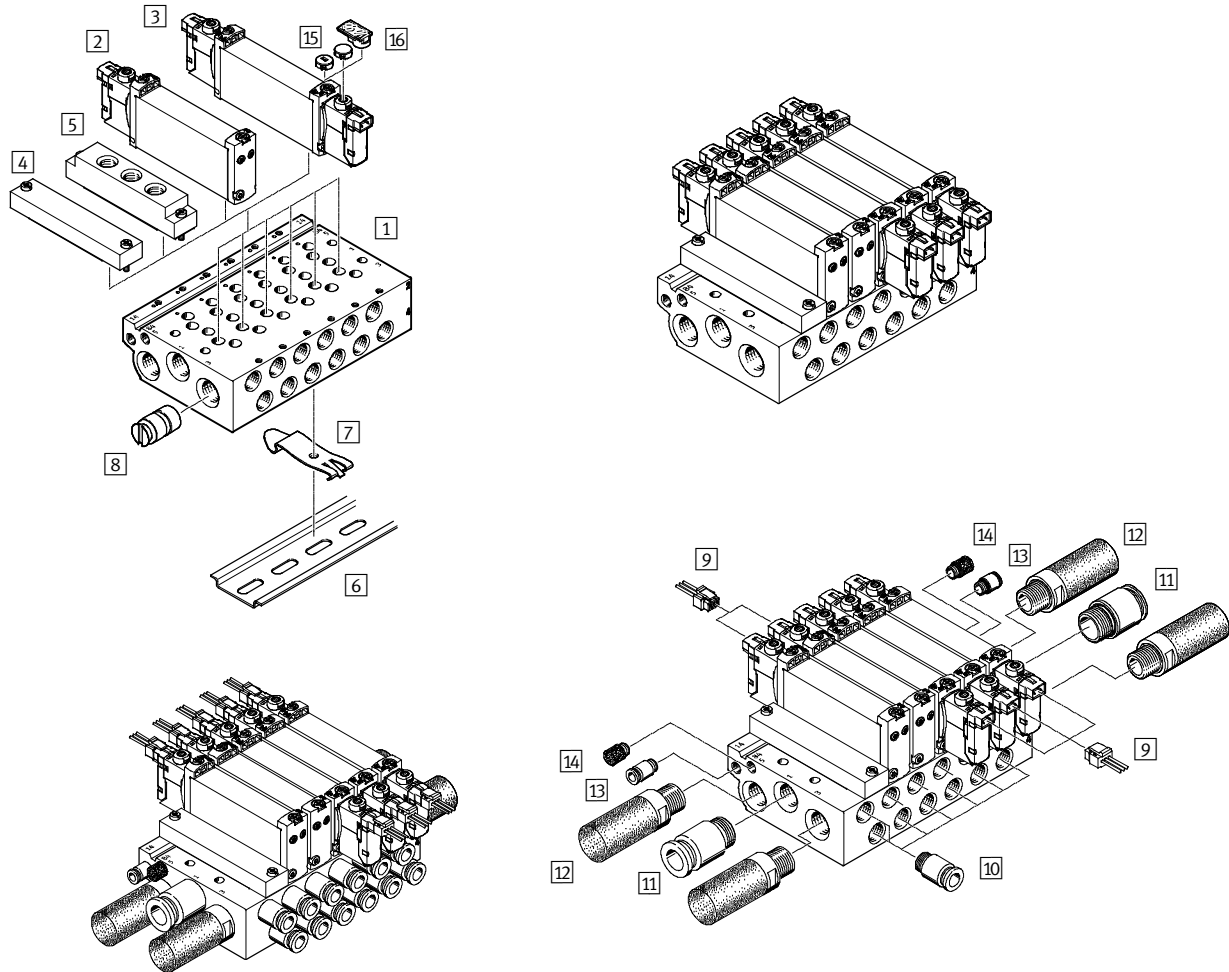

| Manifold assembly and accessories |                          |                         |   |            |
|-----------------------------------|--------------------------|-------------------------|---|------------|
|                                   | Type                     | Brief description       | → Page/Internet   |            |
| 1                                 | Manifold rail            | VABM-L1-14 ...-G14- ... | For 2 to 10, 12, 14 and 16 valve positions                                    | 48         |
| 2                                 | Solenoid valve           | VUVG- ...               | Sub-base valve, 5/2-way single solenoid                                       | 44         |
| 3                                 | Solenoid valve           | VUVG- ...               | Sub-base valve, 2x3/2-way, 5/2-way double solenoid and 5/3-way valve          | 44         |
| 4                                 | Blanking plate           | VABB-L1-14              | For covering an unused valve position   | 48         |
| 5                                 | Supply plate             | VABF-L1-10-P3A4- ...    | For air supply port 1 and outlet port 3 and 5                                 | 48         |
| 6                                 | H-rail                   | NRH-35-2000             | For mounting the valve manifold   | 53         |
| 7                                 | H-rail mounting          | VAME-T-M4               | 2 pieces for fitting the valve manifold on an H-rail                          | 53         |
| 8                                 | Separator                | VABD- ...               | For creating pressure zones   | 48         |
| 9                                 | Plug socket with cable   | NEBV-H1G2-KN-...-LE2    | For E-box H2 and H3   | 53         |
| 10                                | Push-in fitting          | QS...                   | Push-in fitting for outlet port 2 and 4                                       | quick star |
| 11                                | Push-in fitting          | QS...                   | Push-in fitting for air supply port 1   | quick star |
| 12                                | Silencer                 | U...                    | For outlet port 3 and 5   | 53         |
| 13                                | Push-in fitting          | QS...                   | Push-in fitting for pilot air supply port 12/14                               | quick star |
| 14                                | Silencer                 | U...                    | Silencer for pilot air outlet 82/84   | quick star |
| 15                                | Cover cap                | VMPA-HB...-B            | For manual override   | 53         |
| 16                                | Inscription label holder | ASLR-D                  | For labelling the valves, covering the mounting screw and the manual override | 55         |


# Solenoid valves VUVG-B14, sub-base valves


Technical data

Function

2x3/2C, 2x3/2U, 2x3/2H  
 5/2-way, single solenoid  
 5/2-way, double solenoid  
 5/3C, 5/3U, 5/3E

 - Width 14 mm

 - Flow rate  
 510 ... 700 l/min

 - Voltage  
 5, 12 and 24 V DC

Circuit symbol → page 3

| General technical data   |  |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
|--|--|-----------------|-----------------|--|-----------------|-----------------|---------|----------|------------|-----------------|-----------------|-----------------|
| Valve function   | 2x3/2-way  |                 |                 | 2x3/2-way M                                    |                 |                 | 5/2-way |          | 5/2-way M  | 5/3-way         |                 |                 |
| Normal position  | C <sup>1)</sup>                                  | U <sup>2)</sup> | H <sup>4)</sup> | C <sup>1)</sup>                                | U <sup>2)</sup> | H <sup>4)</sup> | -       | -        |            | C <sup>1)</sup> | U <sup>2)</sup> | E <sup>3)</sup> |
| Stable position  | Monostable                                       |                 |                 |  |                 |                 |         | Bistable | Monostable | Monostable      |                 |                 |
| Pneumatic spring reset method                                    | Yes  |                 |                 | No   |                 |                 | Yes     | -        | No         | No              |                 |                 |
| Mechanical spring reset method                                   | No   |                 |                 | Yes  |                 |                 | No      | -        | Yes        | Yes             |                 |                 |
| Vacuum operation at port 1                                       | No   |                 |                 | Only with external pilot air supply            |                 |                 |         |          |            |                 |                 |                 |
| Design   | Piston spool valve                               |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Sealing principle  | Soft   |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Actuation type   | Electric   |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Type of control  | Piloted  |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Pilot air supply   | External, internal; can be selected via sub-base |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Exhaust function   | With flow control                                |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Manual override  | Choice of non-detenting, detenting or covered    |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Type of mounting   | On manifold rail                                 |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Mounting position  | Any  |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Nominal size [mm]  | 4.6  |                 |                 | 4.3  |                 |                 | 5.4     |          |            |                 |                 |                 |
| Standard nominal flow rate [l/min]                               | 600  | 580             | 580             | 470  | 450             | 450             | 680     |          | 580        | 600             | 580             | 580             |
| Flow rate on manifold rail G <sup>1</sup> / <sub>8</sub> [l/min] | 540  | 510             | 540             | 430  | 410             | 410             | 580     |          | 700        | 540             | 510             | 510             |
| Switching time on/off [ms]                                       | 8/23   |                 |                 | 11/15  |                 |                 | 14/28   | -        | 13/40      | 12/40           |                 |                 |
| Changeover time [ms]   | -  |                 |                 |  |                 |                 |         | 8        | 20         |                 |                 |                 |
| Width [mm]   | 14   |                 |                 |  |                 |                 |         |          |            |                 |                 |                 |
| Port   | 1, 3, 5  |                 |                 | G <sup>1</sup> / <sub>4</sub> in manifold rail |                 |                 |         |          |            |                 |                 |                 |
|  | 2, 4   |                 |                 | G <sup>1</sup> / <sub>8</sub> in manifold rail |                 |                 |         |          |            |                 |                 |                 |
|  | 12/14, 82/84                                     |                 |                 | M5 in manifold rail                            |                 |                 |         |          |            |                 |                 |                 |
| Product weight [g]   | 89   |                 |                 | 80   |                 |                 | 78      | 89       | 70         | 89              |                 |                 |
| Corrosion resistance class                                       | CRC  |                 |                 | 2 <sup>6)</sup>                                |                 |                 |         |          |            |                 |                 |                 |

1) C = Normally closed

2) U = Normally open

3) E = Normally exhausted

4) H = 2x3/2-way valve in one housing with 1x normally closed and 1x normally open

6) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

# Solenoid valves VUVG-B14, sub-base valves

Technical data

| Operating and environmental conditions                  |  |             |   |                          |           |            |             |
|---|--|-------------|---|--------------------------|-----------|------------|-------------|
| Valve function  | 2x3/2-way  | 2x3/2-way M | 5/2-way, single solenoid                              | 5/2-way, double solenoid | 5/2-way M | 5/3-way    |             |
| Operating medium  | Filtered compressed air, grade of filtration 40 µm, lubricated or unlubricated |             |   |                          |           |            |             |
| Operating pressure at port 1 with pilot air supply      | Internal   | [bar]       | 1.5 ... 8   | 3 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
|   | External   | [bar]       | 1.5 ... 10  | -0.9 ... 10              |           | -0.9 ... 8 | -0.9 ... 10 |
| Operating pressure at port 3 or 5 with pilot air supply | Internal or external   | [bar]       | -0.9 ... 10   |                          |           | -0.9 ... 8 | -0.9 ... 10 |
|   |  | [bar]       | 1.5 ... 8   | 2 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
| Pilot pressure <sup>1)</sup>                            |  | [bar]       | 1.5 ... 8   | 2 ... 8                  | 2.5 ... 8 | 1.5 ... 8  | 3 ... 8     |
| Ambient temperature                                     |  | [°C]        | -5 ... +50, -5 ... +60 with holding current reduction |                          |           |            |             |
| Temperature of medium                                   |  | [°C]        | -5 ... +50, -5 ... +60 with holding current reduction |                          |           |            |             |

1) Minimum pilot pressure 50% of operating pressure

| Electrical data              |   |
|------------------------------|---|
| Electrical connection        | Via E-box   |
| Operating voltage [V DC]     | 5, 12 and 24 ±10%                                 |
| Power [W]                    | 1, reduced to 0.35 with holding current reduction |
| Duty cycle [%]               | 100   |
| Protection class to EN 60529 | IP40 (with plug socket)                           |

| Information on materials |                         |
|--------------------------|-------------------------|
| Housing                  | Wrought aluminium alloy |
| Seals                    | HNBR, NBR               |
| Note on materials        | RoHS-compliant          |

### Dimensions

2x3/2-way, 5/2-way and 5/3-way valve

1 Horizontal electrical connection      2 Manual override

























Download CAD data → [www.festo.com](http://www.festo.com)

- - Note  
Additional dimensions  
E-boxes  
→ page 49

| Type                | B1   | H1   | L1  | L2  | L3 | L4   | L5   | L6   | L7    | L8    |
|---------------------|------|------|-----|-----|----|------|------|------|-------|-------|
| VUVG-B14 -...-F ... | 14.4 | 34.8 | 107 | 102 | 8  | 66.5 | 4.85 | 6.15 | 89.45 | 86.95 |

# Solenoid valves VUVG-B14, sub-base valves

Order code

|  |   |   |    |   |   |   |   |   |   |  |   |   |   |
|--|---|---|----|---|---|---|---|---|---|--|---|---|---|
| VUVG   | - | B | 14 | - | - | Z | - | F | - | -  | - | L | - |
| <b>Valve design</b><br> <p>Sub-base, manifold valve<br/>incl. seal and screws</p> |   |   |    |   |   |   |   |   |   |  |   |   |   |
| <b>Width</b><br>14 mm <span style="float: right;">14</span>  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| <b>Valve functions</b>   |   |   |    |   |   |   |   |   |   |  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | T32C   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | T32U   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | T32H   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | M52  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | B52  |   |   |   |
|   |   |   |    |   |   |   |   |   |   | P53C   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | P53U   |   |   |   |
|   |   |   |    |   |   |   |   |   |   | P53E   |   |   |   |
| <b>Reset method</b>  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| Pneumatic spring for T32 and M52   |   |   |    |   |   |   |   |   |   | A  |   |   |   |
| Mech. spring for M52   |   |   |    |   |   |   |   |   |   | M  |   |   |   |
| With B52 and P53   |   |   |    |   |   |   |   |   |   | -  |   |   |   |
| <b>Pilot air supply</b>  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| External   |   |   |    |   |   |   |   |   |   | Z  |   |   |   |
| <b>Manual override</b>   |   |   |    |   |   |   |   |   |   |  |   |   |   |
|  Non-detenting  |   |   |    |   |   |   |   |   |   | H  |   |   |   |
|  Covered  |   |   |    |   |   |   |   |   |   | S  |   |   |   |
| - Non-detenting, detenting   |   |   |    |   |   |   |   |   |   | T  |   |   |   |
| <b>Connecting cable</b>  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| W1...4 <sup>1)</sup> Not sheathed  |   |   |    |   |   |   |   |   |   | for H   |   |   |   |
| C1...4 <sup>1)</sup> Sheathed  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| WS1...4 <sup>1)</sup> Not sheathed   |   |   |    |   |   |   |   |   |   | for S   |   |   |   |
| S1...4 <sup>1)</sup> Sheathed  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| N1...4 <sup>6)</sup> M8x1, 3-pin   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| N5...8 <sup>6)</sup> M8x1, 4-pin   |   |   |    |   |   |   |   |   |   |   |   |   |   |
| <b>Display</b>   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| L LED  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| <b>Protective circuit</b>  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| -  |   |   |    |   |   |   |   |   |   | Without holding current reduction (HCR) 1  |   |   |   |
| R <sup>2)</sup>  |   |   |    |   |   |   |   |   |   | With holding current reduction (HCR) 1 to 0.35   |   |   |   |
| <b>E-box</b>   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| H2   |   |   |    |   |   |   |   |   |   | Connection pattern H, horizontal plug                             |   |   |   |
| H3   |   |   |    |   |   |   |   |   |   | Connection pattern H, vertical plug                              |   |   |   |
| S2   |   |   |    |   |   |   |   |   |   | Connection pattern S, horizontal plug                           |   |   |   |
| S3   |   |   |    |   |   |   |   |   |   | Connection pattern S, vertical plug                             |   |   |   |
| L1...4   |   |   |    |   |   |   |   |   |   | With 2x flying leads L: 1 = 0.5 m, 2 = 1 m, 3 = 2.5 m, 4 = 5 m  |   |   |   |
| K6...9   |   |   |    |   |   |   |   |   |   | Cable: K6 = 0.5 m, K7 = 1 m, K8 = 2.5 m, K9 = 5 m               |   |   |   |
| R1   |   |   |    |   |   |   |   |   |   | Individual plug M8, 4-pin                                       |   |   |   |
| R8   |   |   |    |   |   |   |   |   |   | Individual plug M8, 3-pin                                       |   |   |   |
| P3   |   |   |    |   |   |   |   |   |   | Without E-box   |   |   |   |
| <b>Operating voltage</b>   |   |   |    |   |   |   |   |   |   |  |   |   |   |
| 1  |   |   |    |   |   |   |   |   |   | 24 V DC  |   |   |   |
| 5  |   |   |    |   |   |   |   |   |   | 12 V DC  |   |   |   |
| 4  |   |   |    |   |   |   |   |   |   | 5 V DC   |   |   |   |
| <b>Pneumatic connection</b>  |   |   |    |   |   |   |   |   |   |  |   |   |   |
| F  |   |   |    |   |   |   |   |   |   | In the manifold rail   |   |   |   |

1) W1/C1/S1/WS1 = 0.5 m, W2/C2/S2/WS2 = 1 m, W3/C3/S3/WS3 = 2.5 m, W4/C4/S4/WS4 = 5 m  
 2) At 24 V DC


3) If Q... is chosen for the pneumatic connection, this also applies to the exhaust ports 3 and 5

6) Straight: N1/N5 = 2.5 m, N2/N6 = 5 m  
 Angled: N3/N7 = 2.5 m, N4/N8 = 5 m

# Solenoid valves VUVG-B14, sub-base valves


Manifold assembly

Sub-base valve for manifold assembly  
G $\frac{1}{8}$  connection

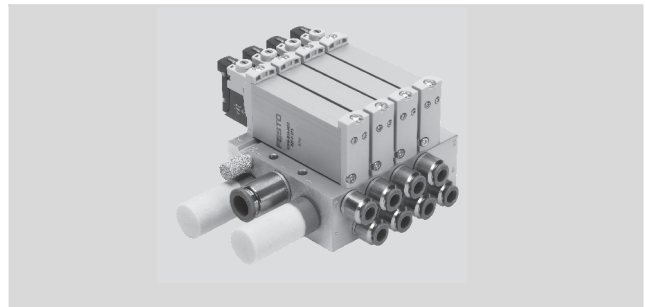

## Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

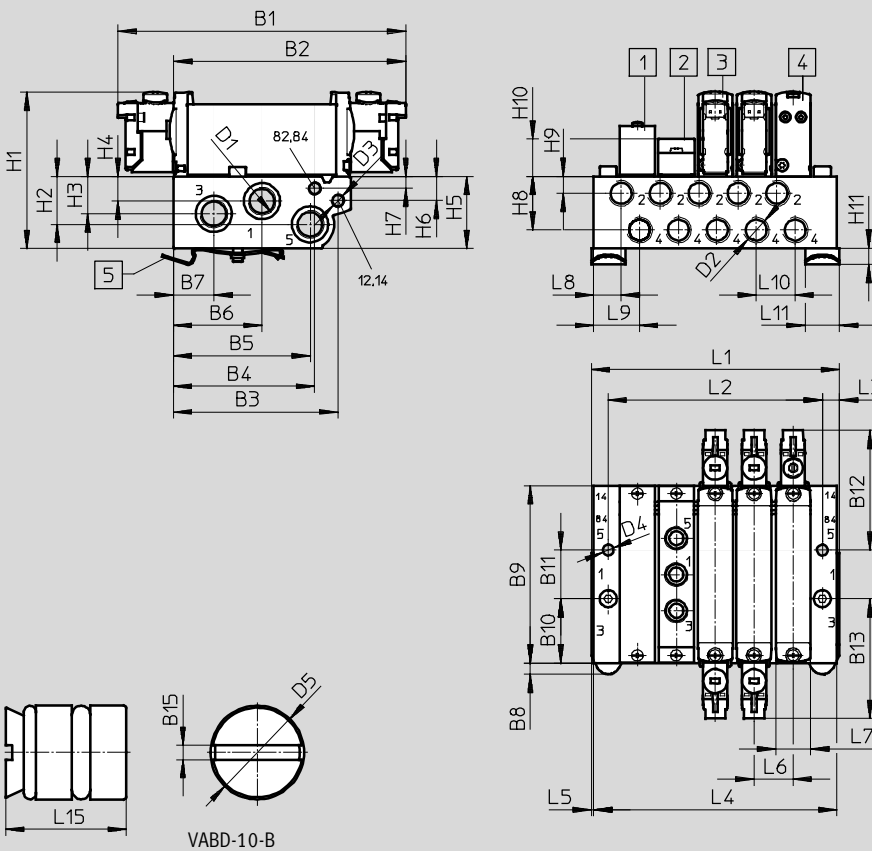

- 1 Blanking plate VABB-L1-14
- 2 Supply plate VABF-L1-14-P3A4-G18
- 3 Double solenoid valve
- 4 Single solenoid valve
- 5 H-rail mounting (two M4x25 screws to DIN 912 are required)


| Type                 |       |      |                 |                 |       |      |      |      |      |      |      |      |
|----------------------|-------|------|-----------------|-----------------|-------|------|------|------|------|------|------|------|
| VUVG-B14 -...-F- ... | B1    | B2   | B3              | B4              | B5    | B6   | B7   | B8   | B9   | B10  | B11  | B12  |
|                      | 118.3 | 95.1 | 67.7            | 58.15           | 56.25 | 36.6 | 16.7 | 4.5  | 72.9 | 26.5 | 20   | 49.1 |
|                      | B13   | B15  | D1              | D2              | D3    | D4   | D5   | H1   | H2   | H3   | H4   | H5   |
|                      | 49.1  | 1.2  | G $\frac{1}{4}$ | G $\frac{1}{8}$ | M5    | Ø4.5 | Ø9.8 | 64.3 | 19.6 | 15.3 | 10.1 | 29.5 |
|                      | H6    | H7   | H8              | H9              | H10   | H11  | L3   | L5   | L6   | L7   | L8   | L9   |
|                      | 9.83  | 4.8  | 22.1            | 7               | 15.4  | 6.8  | 6    | 1    | 16   | 14.4 | 11.3 | 18.5 |
|                      | L10   | L11  | L15             |                 |       |      |      |      |      |      |      |      |
|                      | 16    | 14   | 11              |                 |       |      |      |      |      |      |      |      |

# Solenoid valves VUVG-B14, sub-base valves for G $\frac{1}{8}$

FESTO

Ordering data

| Valve positions | 2    | 3    | 4    | 5     | 6     | 7     | 8     | 9     | 10    | 12    | 14    | 16    |
|-----------------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L1 [mm]         | 56.3 | 72.3 | 88.3 | 104.3 | 120.3 | 136.3 | 152.3 | 168.3 | 184.3 | 216.3 | 248.3 | 280.3 |
| L2 [mm]         | 40   | 56   | 72   | 88    | 104   | 120   | 136   | 152   | 168   | 200   | 232   | 264   |
| L4 [mm]         | 54.3 | 70.3 | 86.3 | 102.3 | 118.3 | 134.3 | 150.3 | 166.3 | 182.3 | 214.3 | 246.6 | 278.3 |
| VABM weight [g] | 232  | 306  | 380  | 454   | 528   | 602   | 676   | 750   | 824   | 972   | 1120  | 1268  |

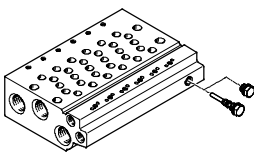



| Technical data Manifold rails <sup>1)</sup>                                       |                 |                 |              |                 |                         |                          |  |        |      |
|---|-----------------|-----------------|--------------|-----------------|-------------------------|--------------------------|--|--------|------|
|   | Port            |                 |              | CRC             | Material <sup>3)</sup>  | Operating pressure [bar] | Max. tightening torque for assembly [Nm] |        |      |
|   | 2, 4            | 1, 3, 5         | 12/14, 82/84 |                 |                         |                          | Valve                                    | H-rail | Wall |
|  | G $\frac{1}{8}$ | G $\frac{1}{4}$ | M5           | 2 <sup>2)</sup> | Wrought aluminium alloy | -0.9 ... 10              | 0.65                                     | 1.5    | 3    |

- Blanking plugs are included with the manifold rail.
- Corrosion resistance class 2 according to Festo standard 940 070  
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- Note on materials: RoHS-compliant

## Order code Manifold rails G $\frac{1}{8}$

|  |      |    |   |    |   |   |                  |                 |                           |
|--|------|----|---|----|---|---|------------------|-----------------|---------------------------|
| VABM   | -    | L1 | - | 14 | W | - | G14              | -               |                           |
| Manifold assembly parts                              |      |    |   |    |   |   |                  |                 | Number of valve positions |
| Manifold rail  | VABM |    |   |    |   |   |                  |                 | 2 to 10, 12, 14 and 16    |
| Valve series   |      |    |   |    |   |   | Ports 1, 3 and 5 |                 |                           |
| VUVG   |      | L1 |   |    |   |   | G14              | G $\frac{1}{4}$ |                           |
| Valve width  |      |    |   |    |   |   |                  |                 |                           |
| 14 mm  |      |    |   | 14 |   |   |                  |                 |                           |
| Manifold rail with ports 1, 2, 3, 4, 5, 12/14, 82/84 |      |    |   |    |   |   |                  |                 |                           |
| Port 2 and 4 in G $\frac{1}{8}$                      |      |    |   |    | W |   |                  |                 |                           |

## Ordering data – Accessories

|   |  |                              | Type                |                                 |
|---|--|------------------------------|---------------------|---------------------------------|
| Blanking plate  |  |                              |                     | Technical data → Internet: vabb |
|  | For manifold rail 14W, sub-base valves | Incl. screws and seal        | VABB-L1-14          |                                 |
| Separator   |  |                              |                     | Technical data → Internet: vabd |
|  | For manifold rail 14W, sub-base valves | Separator for pressure zones | VABD-10-B           |                                 |
| Supply plate  |  |                              |                     | Technical data → Internet: vabf |
|  | For manifold rail 14W                  | Incl. screws and seal        | VABF-L1-14-P3A4-G18 |                                 |
| Seals   |  |                              |                     | Technical data → Internet: vabd |
|  | For sub-base valves B14                | 10 seals and 20 screws       | VABD-L1-14B-S-G18   |                                 |




# Solenoid valves VUVG

E-boxes


## Protective circuit without holding current reduction

The solenoid coils (P type) of the 5, 12 and 24 V variants are equipped with a protective circuit to arrest sparks and protect against polarity reversal.

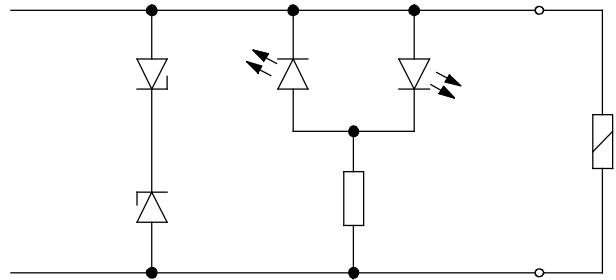

## Protective circuit with holding current reduction

The 24 V DC variant (R type) additionally features holding current reduction. This reduces the power from 1 W to 0.35 W.

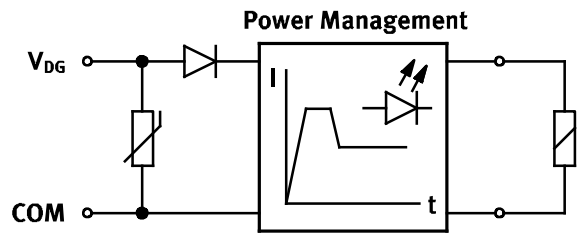

| Pin allocation for E-box                                   |                                 |        |                                   |
|--|---------------------------------|--------|-----------------------------------|
|  | Pin                             |        |                                   |
| Rectangular plug, pin spacing 4 mm, connection pattern H   |                                 |        |                                   |
|  | VAVE-L1-1VH2-LP/VAVE-L1-1VH3-LP |        |                                   |
|  | 1                               | + or - | Without holding current reduction |
|  | 2                               | + or - |                                   |
|  | VAVE-L1-1H2-LR/VAVE-L1-1H3-LR   |        | With holding current reduction    |
| 1  | -                               |        |                                   |
| 2  | +                               |        |                                   |
| Rectangular plug, pin spacing 2.5 mm, connection pattern S |                                 |        |                                   |
|  | VAVE-L1-1VS2-LP/VAVE-L1-1VS3-LP |        |                                   |
|  | 1                               | + or - | Without holding current reduction |
|  | 2                               | + or - |                                   |
|  | VAVE-L1-1S2-LR/VAVE-L1-1S3-LR   |        | With holding current reduction    |
| 1  | -                               |        |                                   |
| 2  | +                               |        |                                   |
| Flying leads, 2-pin  |                                 |        |                                   |
|  | VAVE-L1-1VL1...4-LP             |        |                                   |
|  | 1                               | + or - | Without holding current reduction |
|  | 2                               | + or - |                                   |
|  | VAVE-L1-1L1...4-LR              |        | With holding current reduction    |
| 1  | -                               |        |                                   |
| 2  | +                               |        |                                   |

# Solenoid valves VUVG

E-boxes


| Pin allocation for E-box |                 |          |                                   |
|--------------------------|-----------------|----------|-----------------------------------|
|                          | Pin             |          |                                   |
| Round plug, M8, 3-pin    |                 |          |                                   |
|                          | VAVE-L1-1VR8-LP |          |                                   |
|                          | 1               | Not used | Without holding current reduction |
|                          | 3               | + or -   |                                   |
|                          | 4               | + or -   |                                   |
| Round plug, M8, 4-pin    |                 |          |                                   |
|                          | VAVE-L1-1VR1-LP |          |                                   |
|                          | 1               | Not used | Without holding current reduction |
|                          | 2               | Not used |                                   |
|                          | 3               | + or -   |                                   |
|                          | 4               | + or -   |                                   |
|                          |                 |          |                                   |

# Solenoid valves VUVG


E-boxes




| General technical data     |                |    |    |    |              |                           |                           |
|----------------------------|----------------|----|----|----|--------------|---------------------------|---------------------------|
| Variants                   | H2             | H3 | S2 | S3 | L-           | R1                        | R8                        |
| Mounting position          | Any            |    |    |    |              |                           |                           |
| Electrical connection      | 2-pin, socket  |    |    |    | Flying leads | Individual plug M8, 4-pin | Individual plug M8, 3-pin |
| Protection class           | IP40           |    |    |    |              | IP65                      |                           |
| Switching position display | LED            |    |    |    |              |                           |                           |
| Type of mounting           | Clip           |    |    |    |              | Self-tapping screw        |                           |
| Note on materials          | RoHS-compliant |    |    |    |              |                           |                           |
| Housing colour             | Black          |    |    |    |              |                           |                           |
| Housing materials          | PA             |    |    |    |              |                           |                           |

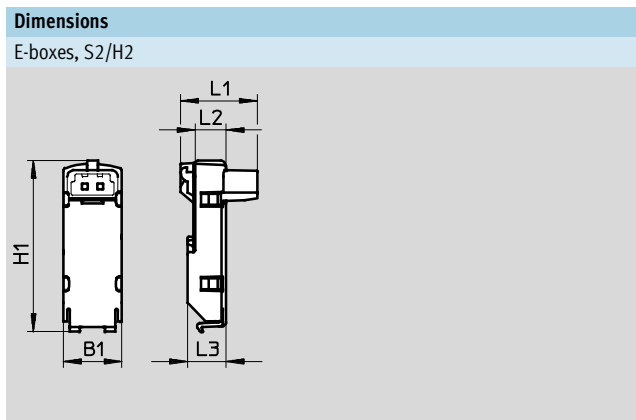


| Type            | B1  | H1<br>±0.5 | L1   | L2  | L3  |
|-----------------|-----|------------|------|-----|-----|
| VAVE-L1-1VS2-LP | 9.8 | 28.8       | 12.9 | 5.2 | 6.5 |
| VAVE-L1-1S2-LR  |     |            | 10.8 |     |     |
| VAVE-L1-1VH2-LP | 9.8 | 28.8       | 12.9 | 5.2 | 6.5 |
| VAVE-L1-H2-LR   |     |            | 10.8 |     |     |

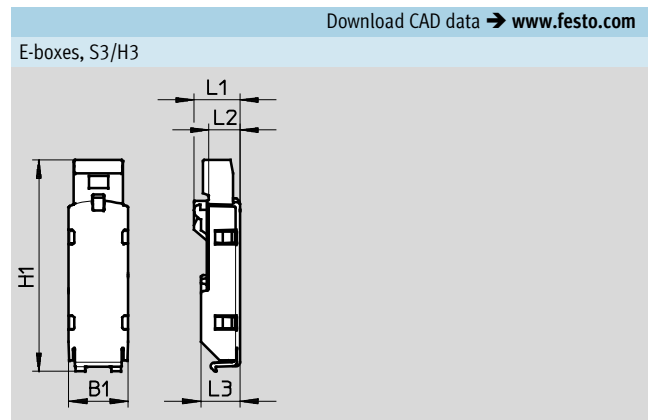

| Type            | B1  | H1<br>±0.5 | L1  | L2  | L3  |
|-----------------|-----|------------|-----|-----|-----|
| VAVE-L1-1VS3-LP | 9.8 | 35         | 7.6 | 5.2 | 6.5 |
| VAVE-L1-1S3-LR  |     |            | 7.5 |     |     |
| VAVE-L1-1VH3-LP | 9.8 | 35         | 7.6 | 5.2 | 6.5 |
| VAVE-L1-1H3-LR  |     |            | 7.5 |     |     |

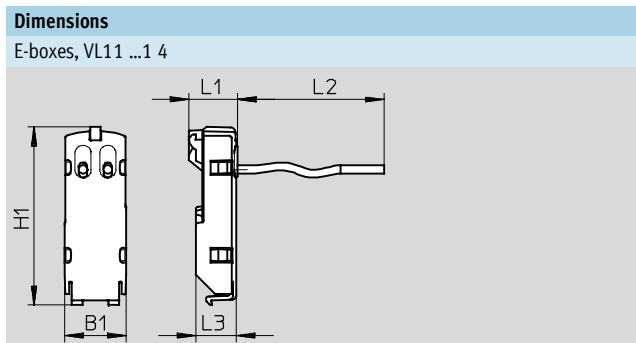

| Type            | B1  | H1<br>±0.5 | L1  | L2  | L3  |
|-----------------|-----|------------|-----|-----|-----|
| VAVE-L1-1VL1-LP | 9.8 | 28.8       | 7.9 | 0.5 | 6.5 |
| VAVE-L1-1L1-LR  |     |            |     | 1   |     |
| VAVE-L1-1VL2-LP | 9.8 | 28.8       | 7.9 | 2.5 | 6.5 |
| VAVE-L1-1L2-LR  |     |            |     | 5   |     |
| VAVE-L1-1VL3-LP | 9.8 | 28.8       | 7.9 | 5   | 6.5 |
| VAVE-L1-1L3-LR  |     |            |     | 10  |     |
| VAVE-L1-1VL4-LP | 9.8 | 28.8       | 7.9 | 10  | 6.5 |
| VAVE-L1-1L4-LR  |     |            |     | 15  |     |

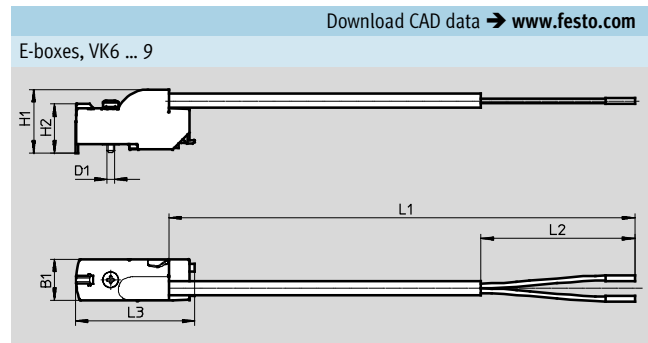

| Type            | B1  | H1   | H2<br>±0.3 | L1  | L2<br>±5 | L3<br>±0.5 | D1<br>∅ |
|-----------------|-----|------|------------|-----|----------|------------|---------|
| VAVE-L1-1VK6-LP | 9.8 | 15.3 | 11.8       | 0.5 | 50       | 28.7       | 1.8     |
| VAVE-L1-1VK7-LP |     |      |            | 1   |          |            |         |
| VAVE-L1-1VK8-LP | 9.8 | 15.3 | 11.8       | 2.5 | 50       | 28.7       | 1.8     |
| VAVE-L1-1VK9-LP |     |      |            | 5   |          |            |         |
| VAVE-L1-1K6-LR  | 9.8 | 15.3 | 11.8       | 0.5 | 50       | 28.7       | 1.8     |
| VAVE-L1-1K7-LR  |     |      |            | 1   |          |            |         |
| VAVE-L1-1K8-LR  | 9.8 | 15.3 | 11.8       | 2.5 | 50       | 28.7       | 1.8     |
| VAVE-L1-1K9-LR  |     |      |            | 5   |          |            |         |

# Solenoid valves VUVG

E-boxes

Dimensions Download CAD data → [www.festo.com](http://www.festo.com)

E-boxes, R8/R1



| Type            | B1  | H1   | H2   | H3   | L1   | L2  | L3  | L4  | D1 |
|-----------------|-----|------|------|------|------|-----|-----|-----|----|
| VAVE-L1-1VR8-LP | 9.8 | 28.7 | 13.7 | 20.2 | 18.4 | 9.9 | 9.7 | 8.6 | M8 |
| VAVE-L1-1VR1-LP |     |      |      |      |      |     |     |     |    |








## Ordering data – E-boxes

| Design | Plug           | Additional functions                       | Ambient temperature [°C] | Code | Power | Voltage | Type            |       |                 |
|--------|----------------|--|--------------------------|------|-------|---------|-----------------|-------|-----------------|
|        |                |  |                          |      | [W]   | [V DC]  |                 |       |                 |
|        | NEBV-H1 ...    | Spark arresting, bipolar                   | -5 ... +50               | H2   | 1     | 12/24   | VAVE-L1-1VH2-LP |       |                 |
|        |                | Spark arresting, holding current reduction | -5 ... +60               | H2R  | 0.35  | 24      | VAVE-L1-1H2-LR  |       |                 |
|        | NEBV-H1 ...    | Spark arresting, bipolar                   | -5 ... +50               | H3   | 1     | 12/24   | VAVE-L1-1VH3-LP |       |                 |
|        |                | Spark arresting, holding current reduction | -5 ... +60               | H3R  | 0.35  | 24      | VAVE-L1-1H3-LR  |       |                 |
|        | NEBV-HS ...    | Spark arresting, bipolar                   | -5 ... +50               | S2   | 1     | 12/24   | VAVE-L1-1VS2-LP |       |                 |
|        |                | Spark arresting, holding current reduction | -5 ... +60               | S2R  | 0.35  | 24      | VAVE-L1-1S2-LR  |       |                 |
|        | NEBV-HS ...    | Spark arresting, bipolar                   | -5 ... +50               | S3   | 1     | 12/24   | VAVE-L1-1VS3-LP |       |                 |
|        |                | Spark arresting, holding current reduction | -5 ... +60               | S3R  | 0.35  | 24      | VAVE-L1-1S3-LR  |       |                 |
|        | Open cable end | Spark arresting, bipolar                   | -5 ... +50               | L1   | 1     | 12/24   | VAVE-L1-1VL1-LP |       |                 |
|        |                |  |                          | L2   |       |         | VAVE-L1-1VL2-LP |       |                 |
|        |                |  |                          | L3   |       |         | VAVE-L1-1VL3-LP |       |                 |
|        |                |  |                          | L4   |       |         | VAVE-L1-1VL4-LP |       |                 |
|        |                | Spark arresting, holding current reduction | -5 ... +60               | L1R  | 0.35  | 24      | VAVE-L1-1L1-LR  |       |                 |
|        |                |  |                          | L2R  |       |         | VAVE-L1-1L2-LR  |       |                 |
|        |                |  |                          | L3R  |       |         | VAVE-L1-1L3-LR  |       |                 |
|        |                |  |                          | L4R  |       |         | VAVE-L1-1L4-LR  |       |                 |
|        | Open cable end | Spark arresting, bipolar                   | -5 ... +60               | K6   | 1     | 12/24   | VAVE-L1-1VK6-LP |       |                 |
|        |                |  |                          | K7   |       |         | VAVE-L1-1VK7-LP |       |                 |
|        |                |  |                          | K8   |       |         | VAVE-L1-1VK8-LP |       |                 |
|        |                |  |                          | K9   |       |         | VAVE-L1-1VK9-LP |       |                 |
|        |                | Spark arresting, holding current reduction | -5 ... +60               | K6R  | 0.35  | 24      | VAVE-L1-1K6-LR  |       |                 |
|        |                |  |                          | K7R  |       |         | VAVE-L1-1K7-LR  |       |                 |
|        |                |  |                          | K8R  |       |         | VAVE-L1-1K8-LR  |       |                 |
|        |                |  |                          | K9R  |       |         | VAVE-L1-1K9-LR  |       |                 |
|        | NEBU-M8 ...    | Spark arresting, bipolar                   | -5 ... +60               | R8   | 1     | 12/24   | VAVE-L1-1VR8-LP |       |                 |
|        |                | Spark arresting, holding current reduction |                          | R8R  |       |         | 0.35            | 24    | VAVE-L1-1R8-LR  |
|        |                | Spark arresting, bipolar                   |                          | R1   |       |         | 1               | 12/24 | VAVE-L1-1VR1-LP |
|        |                | Spark arresting, holding current reduction |                          | R1R  |       |         | 0.35            | 24    | VAVE-L1-1R1-LR  |

# Solenoid valves VUVG

Accessories







FESTO

| Ordering data   |  |                  |                                 |
|---|--|------------------|---------------------------------|
|   | Description  | Cable length [m] | Type                            |
| Plug socket with cable, not sheathed, open end                                      |  |                  | Technical data → Internet: nebv |
|    | For E-box code H2, H2R or H3, H3R,<br>2-pin socket | 0.5              | NEBV-H1G2-KN-0.5-N-LE2          |
|   |  | 1                | NEBV-H1G2-KN-1-N-LE2            |
|   |  | 2.5              | NEBV-H1G2-KN-2.5-N-LE2          |
|   |  | 5                | NEBV-H1G2-KN-5-N-LE2            |
| Plug socket with cable, sheathed, open end  |  |                  | Technical data → Internet: nebv |
|    | For E-box code H2, H2R or H3, H3R,<br>2-pin socket | 0.5              | NEBV-H1G2-P-0.5-N-LE2           |
|   |  | 1                | NEBV-H1G2-P-1-N-LE2             |
|   |  | 2.5              | NEBV-H1G2-P-2.5-N-LE2           |
|   |  | 5                | NEBV-H1G2-P-5-N-LE2             |
| Plug socket with cable, not sheathed, open end                                      |  |                  | Technical data → Internet: nebv |
|    | For E-box code S2, S2R or S3, S3R,<br>2-pin socket | 0.5              | NEBV-HSG2-KN-0.5-N-LE2          |
|   |  | 1                | NEBV-HSG2-KN-1-N-LE2            |
|   |  | 2.5              | NEBV-HSG2-KN-2.5-N-LE2          |
|   |  | 5                | NEBV-HSG2-KN-5-N-LE2            |
| Plug socket with cable, sheathed, open end  |  |                  | Technical data → Internet: nebv |
|   | For E-box code S2, S2R or S3, S3R,<br>2-pin socket | 0.5              | NEBV-HSG2-P-0.5-N-LE2           |
|   |  | 1                | NEBV-HSG2-P-1-N-LE2             |
|   |  | 2.5              | NEBV-HSG2-P-2.5-N-LE2           |
|   |  | 5                | NEBV-HSG2-P-5-N-LE2             |
| Connecting cable, open end  |  |                  | Technical data → Internet: nebu |
|  | For E-box code R8,<br>3-pin, straight socket, M8x1 | 2.5              | NEBU-M8G3-K-2.5-LE3             |
|   |  | 5                | NEBU-M8G3-K-5-LE3               |
|   | For E-box code R1,<br>4-pin, straight socket, M8x1 | 2.5              | NEBU-M8G4-K-2.5-LE4             |
|   |  | 5                | NEBU-M8G4-K-5-LE4               |
| Connecting cable, open end  |  |                  | Technical data → Internet: nebu |
|  | For E-box code R8,<br>3-pin, angled socket, M8x1   | 2.5              | NEBU-M8W3-K-2.5-LE3             |
|   |  | 5                | NEBU-M8W3-K-5-LE3               |
|   | For E-box code R1,<br>4-pin, angled socket, M8x1   | 2.5              | NEBU-M8W4-K-2.5-LE4             |
|   |  | 5                | NEBU-M8W4-K-5-LE4               |
| Connecting cable  |  |                  |                                 |
|  | For E-box code R8,<br>3-pin, straight socket, M8x1 | 0.5              | NEBU-M8G3-K-0.5-M8G3            |
|   |  | 1                | NEBU-M8G3-K-1-M8G3              |
|   |  | 2.5              | NEBU-M8G3-K-2.5-M8G3            |
|   |  | 5                | NEBU-M8G3-K-5-M8G3              |
|   | For E-box code R1,<br>4-pin, straight socket, M8x1 | 10               | NEBU-M8G3-K-10-M8G3             |
|   |  | 2.5              | NEBU-M8G3-K-2.5-M8G4            |
|   |  | 2.5              | NEBU-M8G4-K-2.5-M8G4            |

# Solenoid valves VUVG

Accessories






FESTO

| Ordering data   |                             |            |                                |
|---|-----------------------------|------------|--------------------------------|
|   | Description                 |            | Type                           |
| Blanking plug   |                             |            | Technical data → Internet: b   |
|    | For manifold rail and valve |            | B-M5-B                         |
|   | For manifold rail           |            | B-M7                           |
|   |                             |            | B-1/8                          |
|   |                             |            | B-1/4                          |
| Blanking plug   |                             |            | Technical data → Internet: qs  |
|    | For valve                   |            | QSC-F-G1/8-I                   |
| Reducing nipple   |                             |            |                                |
|    |                             |            | D-M5I-M7A-ISK                  |
| Fittings  |                             |            | Technical data → Internet: qsm |
|    | For tubing ø 3 mm           | 100 pieces | QSM-M3-3-I-R-100               |
|   | For tubing ø 4 mm           |            | QSM-M3-4-I-R-100               |
|   | For tubing ø 3 mm           |            | QSM-M5-3-I-R100                |
|   | For tubing ø 4 mm           |            | QSM-M5-4-I-R100                |
|   | For tubing ø 6 mm           |            | QSM-M5-6-I-R100                |
|   | For tubing ø 6 mm           |            | QSM-M7-6-I-R100                |
|   | For tubing ø 3 mm           | 10 pieces  | QSM-M5-3-I                     |
|   | For tubing ø 4 mm           |            | QSM-M5-4-I                     |
|   | For tubing ø 6 mm           |            | QSM-M5-6-I                     |
|   | For tubing ø 4 mm           |            | QSM-M7-4-I                     |
|   | For tubing ø 6 mm           |            | QSM-M7-6-I                     |
|   | For tubing ø 4 mm           | 10 pieces  | QS-G1/8-4-I                    |
|   | For tubing ø 6 mm           |            | QS-G1/8-6-I                    |
|   | For tubing ø 8 mm           |            | QS-G1/8-8-I                    |
| For tubing ø 10 mm  | QS-G1/8-10-I                |            |                                |
|  | For tubing ø 6 mm           | 10 pieces  | QS-G1/4-6-I                    |
|   | For tubing ø 8 mm           |            | QS-G1/4-8-I                    |
|   | For tubing ø 10 mm          |            | QS-G1/4-10-I                   |
| Silencer  |                             |            | Technical data → Internet: uc  |
|  | For thread M5               |            | U-M5                           |
|   | For thread M7               |            | UC-M7                          |
|   | For thread G1/8             |            | UC-1/8                         |
|   | For thread G1/4             |            | UC-1/4                         |

# Solenoid valves VUVG

Accessories

**FESTO**

| Ordering data   |  |           |                                 |
|---|--|-----------|---------------------------------|
|   | Description  |           | Type                            |
| H-rail  |  |           | Technical data → Internet: nrh  |
|  | To EN 60715, 35 x 7.5 (WxH)  | 2 m       | <b>NRH-35-2000</b>              |
| H-rail mounting   |  |           | Technical data → Internet: vame |
|  | -  | 2 pieces  | <b>VAME-T-M4</b>                |
| Covers for manual override  |  |           | Technical data → Internet: vmpa |
|  | Covered  | 10 pieces | <b>VMPA-HBV-B</b>               |
|  | Non-detenting  |           | <b>VMPA-HBT-B</b>               |
| Inscription label holder  |  |           | Technical data → Internet: aslr |
|  | Holder for an inscription label and cover for mounting screw and manual override | 10 pieces | <b>ASLR-D-L1</b>                |