



WLR2 Special photoelectric reflex switch, red light for accumulation roller conveyors




- Special photoelectric reflex switch (FGS adjustable)
- Very insensitive against mirroring, reflecting, shiny, depolarizing surfaces
- Integrated logic for accumulating roller conveyors, especially for motorised rollers

Dimensional drawing
WLR2-P610SC1

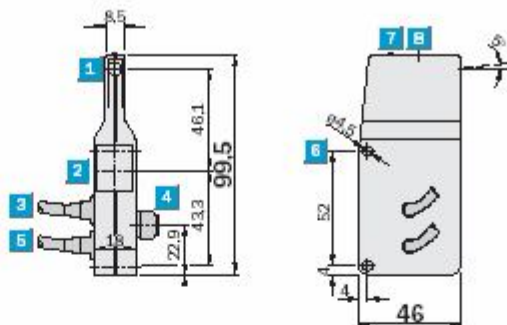

Adjustments possible
WLR2-P610SC1

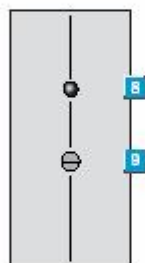

- 1 Centre of transmitter's optical axis
- 2 Centre of receiver's optical axis
- 3 Cable with receptacle, 4-pin
- 4 Plug M12, 4-pin
- 5 Cable for motor
- 6 Mounting holes ø 4.5 mm
- 7 LED signal strength indicator
- 8 Scanning distance adjustment



Connection type
WLR2-P610SC1



4-pin, M12

See chapter Accessories
Cables and connectors
Mounting systems
Reflectors

