

Description

One, two and three pole thermal-magnetic circuit breakers with trip-free mechanism and toggle actuation (S-type TM CBE to EN 60934/IEC 934). Designed for panel or plug-in mounting. Available with auxiliary contacts (1 x N/O, 1 x N/C) for status signalling. Two and three pole models are internally linked to ensure that both/all poles trip in the event of an overload on one pole, even if the actuator is held in the ON position. A choice of characteristic curves further extends the range of applications possibilities for these CBEs. Special auxiliary contact versions for industrial atmosphere and low voltages (e.g. 5 V) available on request.

Approved to CBE standard EN 60934 (IEC 60934).
Suitable for use in distribution rails – see section 7.



2210-S2..

Typical applications

Process control equipment, robotics, machine tool control, communications systems, instrumentation, rail vehicles. Special versions, e.g. for aggressive environmental conditions and low voltages (e.g. 5 V) on request.

Ordering information

Type No.

2210 single or multipole thermal-magnetic circuit breaker

Mounting	S socket or panel mounting
Actuator design	2 toggle
Number of poles	<ul style="list-style-type: none"> 1 1-pole protected 2 2-pole protected 3 3-pole protected 5 2-pole, protected on one pole only
Panel mounting	<ul style="list-style-type: none"> 0 without hardware 1 with M3 thread 2 with 6/32 thread
Terminal design (main contacts)	P1 blade terminals 6.3-0.8 (QC .250)
Characteristic curve	<ul style="list-style-type: none"> F1 fast acting: therm.1.01-1.4xI_N; magn.2-4xI_N DC (DC only) F2 fast acting: therm.1.01-1.4xI_N; magn.3.5-6.5xI_N AC/ 4.5-8.5xI_N DC M1 standard delay: therm. 1.01-1.4xI_N; magn. 6-12xI_N AC; 7.8-15.6xI_N DC T1 delayed: therm. 1.01-1.4xI_N; magn. 10-20xI_N AC T2 thermal only, 1.01-1.4xI_N M3 standard delay, low resistance: therm.1.4-1.8xI_N; magn. 6-12xI_N AC; 7.8-15.6xI_N DC
Intermediate position	<ul style="list-style-type: none"> H without intermediate position (standard) Z with intermediate position
Auxiliary contacts	<ul style="list-style-type: none"> 0 without auxiliary contacts 1 with auxiliary contacts in all poles 2 with auxiliary contacts in pole 1 (only multipole devices) 3 with auxiliary contacts in poles 1 and 3 (\geq 3-pole devices)
Auxiliary contact function (see diagram)	<ul style="list-style-type: none"> 1 one each N/C and N/O (standard) 2 one N/O contact (23/24) 3 one N/C contact (11/12)
Auxiliary contact - terminal design	1 same as main terminals
Current ratings	0.1...25 A
2210 - S 2 1 0 - P1 F1 - H 1 1 1 - 10 A ordering example	

Remote trip coil available to special order.

Technical data

For further details please see chapter: Technical Information

Voltage rating	AC 250 V*; 3 AC 433 V (50-60Hz); DC 65 V (*UL: AC 277 V; DC 65 V)																				
Current rating range	0.1...25 A for curves M1, T1, T2 0.1...16 A for curves F1, F2, M3																				
Auxiliary circuit	1 A, AC 240 V/DC 65 V																				
Typical life	10,000 operations at 1 x I _N , inductive																				
Ambient temperature	-30...+60 °C (-22...+140 °F) T 60																				
Insulation co-ordination (IEC 60664 and 60664A)	rated impulse withstand voltage pollution degree 2.5 kV 2 reinforced insulation in operating area																				
Dielectric strength (IEC 60664 and 60664A)	test voltage operating area AC 3,000 V main/aux. circuit AC 1,500 V aux. circuit 11-12/23-24 AC 1,000 V pole/pole AC 1,500 V																				
Insulation resistance	> 100 MΩ (DC 500 V)																				
Interrupting capacity I _{cn}	0.1...5 A 400 A; 6...25 A 800 A curve T2 : 0.1...25 A 15 x I _N curve M3: 0.1...2 A AC 200 A / DC 400 A																				
Interrupting capacity (UL 1077)	<table border="1"> <thead> <tr> <th>I_N U_N</th> <th>0.1...8 A AC 250 V</th> <th>10...16 A AC 125 V</th> <th>20...25 A AC 250 V</th> <th>0.1...25 A DC 65 V</th> </tr> </thead> <tbody> <tr> <td>1-pole</td><td>1,000 A</td><td>2,000 A</td><td>3,500 A</td><td>2,000 A</td></tr> <tr> <td>2-pole</td><td>2,000 A</td><td>2,000 A</td><td>3,500 A</td><td>2,000 A</td></tr> <tr> <td>3-pole</td><td>3AC 250V 2,000 A</td><td>3AC 250V 2,000 A</td><td>3AC 216V 3,500 A</td><td></td></tr> </tbody> </table>	I _N U _N	0.1...8 A AC 250 V	10...16 A AC 125 V	20...25 A AC 250 V	0.1...25 A DC 65 V	1-pole	1,000 A	2,000 A	3,500 A	2,000 A	2-pole	2,000 A	2,000 A	3,500 A	2,000 A	3-pole	3AC 250V 2,000 A	3AC 250V 2,000 A	3AC 216V 3,500 A	
I _N U _N	0.1...8 A AC 250 V	10...16 A AC 125 V	20...25 A AC 250 V	0.1...25 A DC 65 V																	
1-pole	1,000 A	2,000 A	3,500 A	2,000 A																	
2-pole	2,000 A	2,000 A	3,500 A	2,000 A																	
3-pole	3AC 250V 2,000 A	3AC 250V 2,000 A	3AC 216V 3,500 A																		
Degree of protection (IEC 60529/DIN 40050)	operating area IP30 terminal area IP00																				
Vibration	curve F1: 3 g (57-500 Hz), \pm 0.23 mm (10-57 Hz) curves M1, M3, T1, T2: 5 g (57-500 Hz), \pm 0.38 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis																				
Shock	curve F1: 25 g (11 ms), directions 1, 2, 3, 4, 5 10 g (11 ms), direction 6 curves M1, M3, T1, T2: 25 g (11 ms), directions 1, 2, 3, 4, 5 20 g (11 ms), direction 6 to IEC 60068-2-27, test Ea																				
Corrosion	96 hours in 5 % salt mist to IEC 60068-2-11, test Ka																				
Humidity	240 hours at 95 % RH to IEC 60068-2-3, test Ca																				
Mass	approx. 50 g per pole																				

E-TA® Thermal-Magnetic Circuit Breaker 2210-S2..


Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)					
	F1 fast acting for DC only	F2 fast acting delay for AC + DC	M1 standard for AC + DC	T1 delayed low resistance nur für AC	M3 standard delay for AC + DC	T2 thermal for AC + DC
0.1	162	162	92	81	42	77
0.2	39.3	39.3	26.1	24.2	11.7	23
0.3	17.5	17.5	11.6	10.4	5.6	10.2
0.4	9.2	9.2	6.6	6.0	2.9	5.7
0.5	6.8	6.8	4.1	3.9	1.75	3.7
0.6	4.2	4.2	3	2.7	1.42	2.6
0.8	2.8	2.8	1.65	1.53	0.75	1.39
1	1.6	1.6	1.10	0.98	0.5	0.9
1.5	0.78	0.78	0.47	0.42	0.22	0.36
2	0.42	0.42	0.28	0.24	0.136	0.19
2.5	0.26	0.26	0.183	0.17	0.083	0.141
3	0.18	0.18	0.124	0.12	0.057	0.091
4	0.12	0.12	0.077	0.073	0.041	0.051
5	0.092	0.092	0.063	0.055	0.032	0.040
6	0.054	0.054	0.045	0.039	0.021	0.027
8	0.025	0.025	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
10	0.022	0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
12	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
16	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
20	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02
25	-	-	≤ 0.02	≤ 0.02	-	≤ 0.02


Approvals

Authority	Voltage ratings	Current ratings
VDE (EN 60934)	AC 250 V; DC 65 V; 3 AC 433 V	0.1...25 A
UL, CSA	AC 277 V; DC 65 V; AC 277/480 V	0.1...25 A


Toggle positions

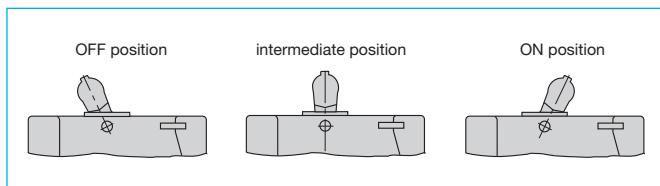


Shock directions

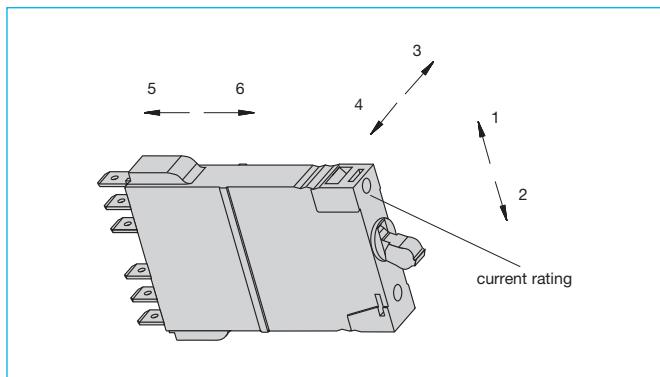


Dimensions

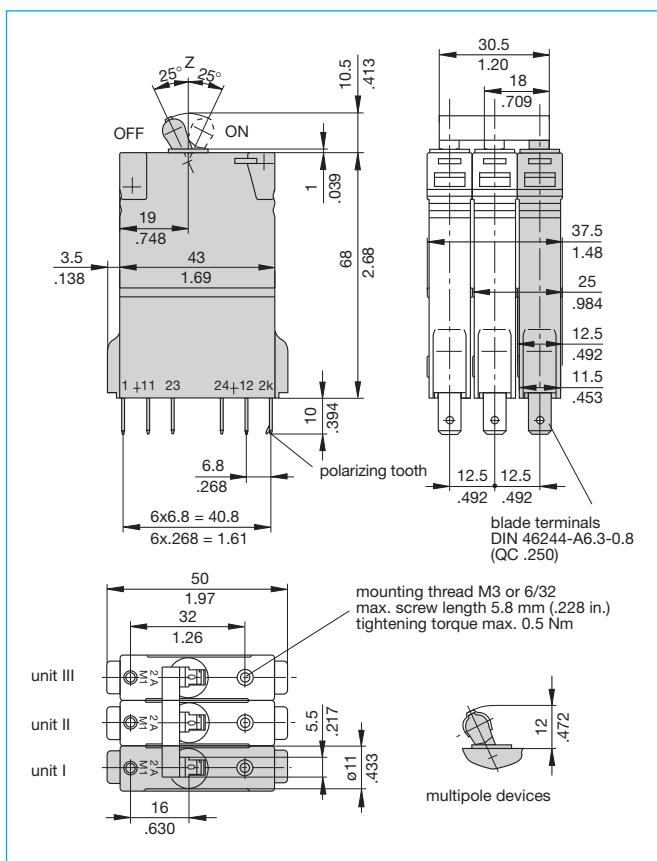

Cut-out dimensions

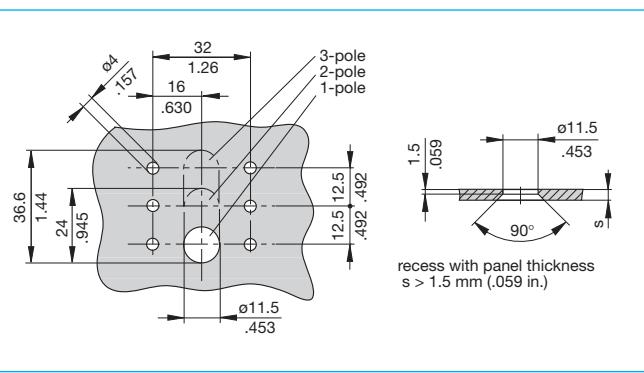


Installation drawing

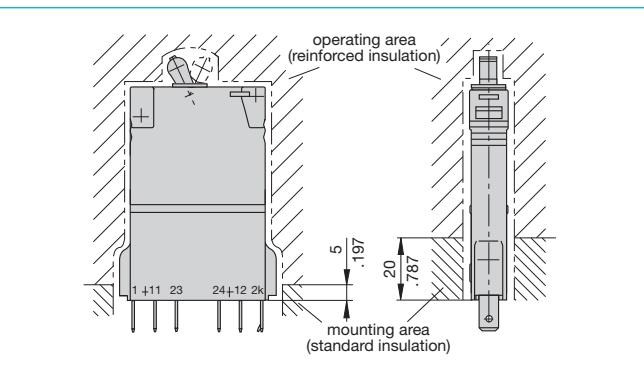

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)


Internal connection diagrams

with auxiliary contact function 1 (one each N/O and N/C)
 (...-H111-...) without intermediate position
 (...-Z111-...) with intermediate position

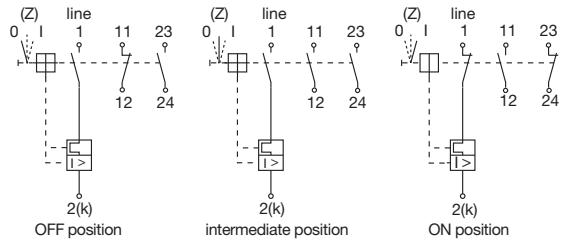


Typical time/current characteristics


-F1 0.1 ... 16 A DC only

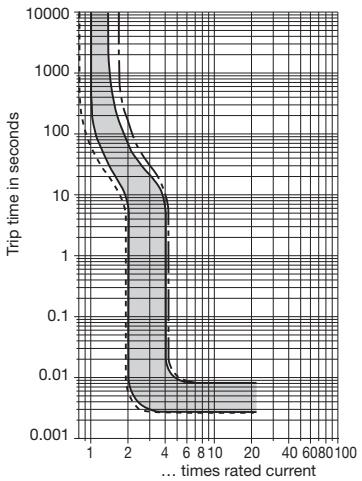

-F2 0.1 ... 7.5 A AC/DC¹⁾

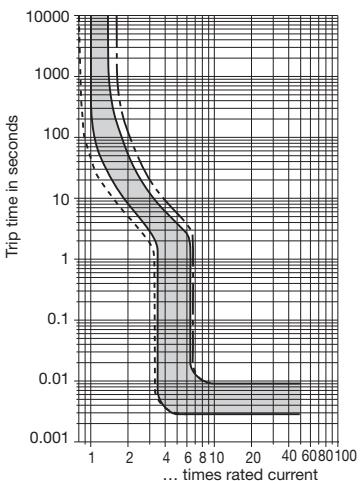

-F2 8 ... 16 A AC/DC¹⁾

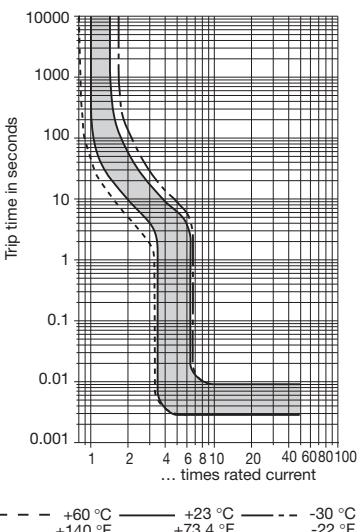

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

Ambient temperature °F	-22	-4	+14	+32	+73.4	+86	+104	+122	+140
°C	-30	-20	-10	0	+23	+30	+40	+50	+60

Deringing factor 0.76 0.79 0.83 0.88 1 1.04 1.11 1.19 1.29

Multipole devices: all poles symmetrically loaded. With single pole overload, thermal tripping will be at max. $1.7 \times I_N$ with curves F1, F2, M1 and T2, and at max. $2.2 \times I_N$ with curve M3.

¹⁾ Magnetic tripping currents are increased by 30% on DC supplies.









Typical time/current characteristics

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section 9 – Technical information.

Ambient temperature	-22 °F -30 °C	-4 °F -20 °C	+14 °F +10 °C	+32 °F +23 °C	+73.4 °F +23 °C	+86 °F +30 °C	+104 °F +40 °C	+122 °F +50 °C	+140 °F +60 °C
Derating factor	0.76	0.79	0.83	0.88	1	1.04	1.11	1.19	1.29

Multi pole devices: all poles symmetrically loaded. With single pole overload, thermal tripping will be at max. $1.7 \times I_N$ with curves F1, F2, M1 and T2, and at max. $2.2 \times I_N$ with curve M3.

¹⁾ Magnetic tripping currents are increased by 30% on DC supplies (curves M1, M3, T1).

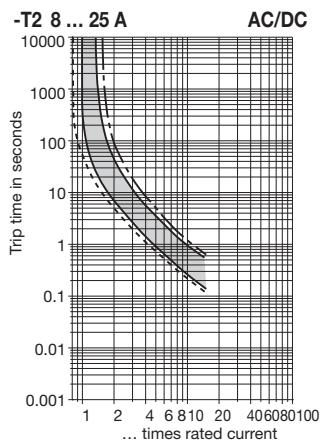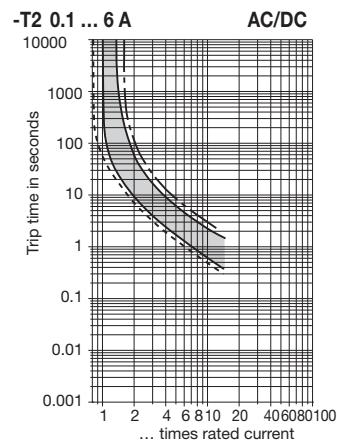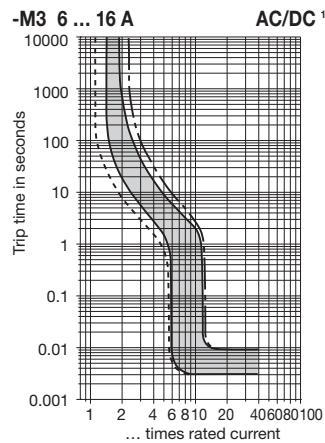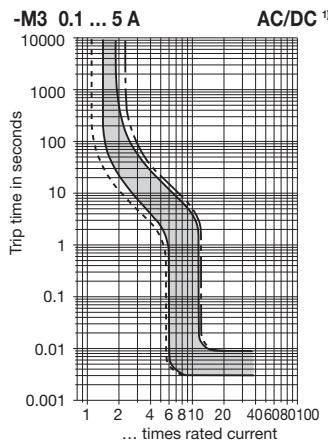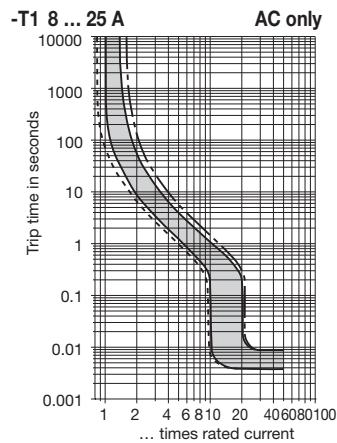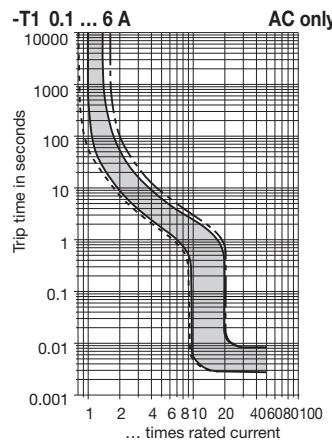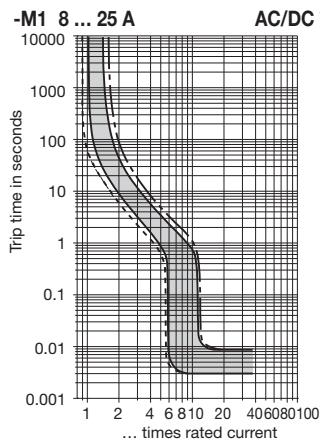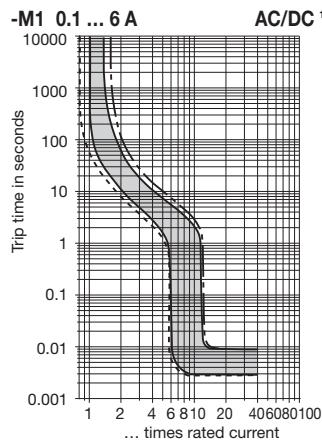


— +60 °C — +23 °C — -30 °C - - - - - +140 °F — +73.4 °F - - - - - -22 °F

Accessories


Module 17plus

For technical data see section 7 - Power distribution systems

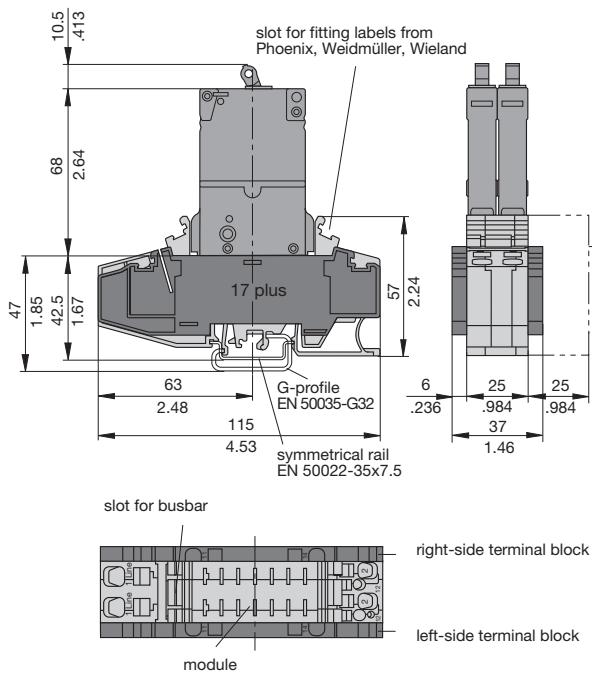


2-way mounting socket 23-P10-Si

(up to 16 A max. load)
(retaining clip Y 302 974 01 available on request)

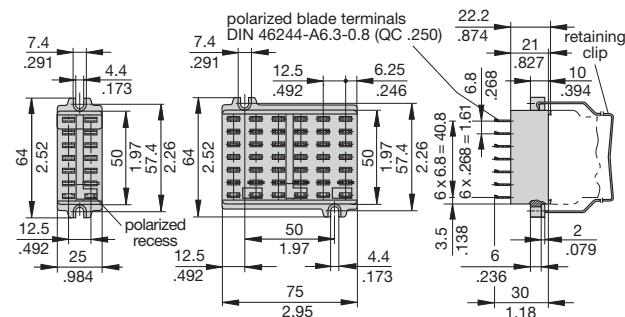


6-way mounting socket 63-P10-Si

(up to 16 A max. load)
(retaining clip Y 302 974 01 available on request)

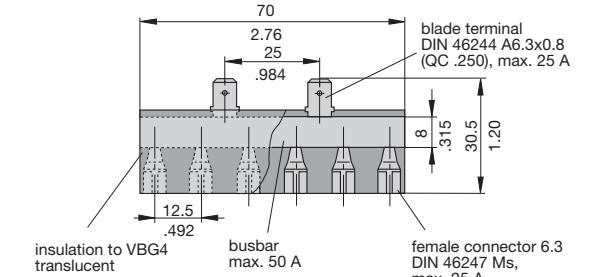

Bus bar 50 A, 6-way, for type 63-P10-Si socket X 221 760 11

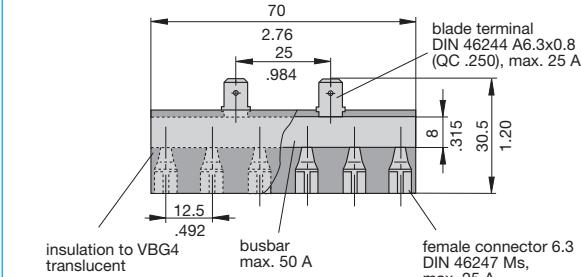

Single mounting sockets

(up to 16 A max. load)

17-P10-Si

17-P70-Si

(retaining clip Y 302 974 21 available on request)


(with adapter)

17-P10-Si-20025


17-P70-Si-20025

polarized blade terminal
DIN 46244-A6.3x0.8 (QC .250)

blade terminal DIN 46244 part 2
C profile (2xA2.8-0.8) (QC 2x.110)

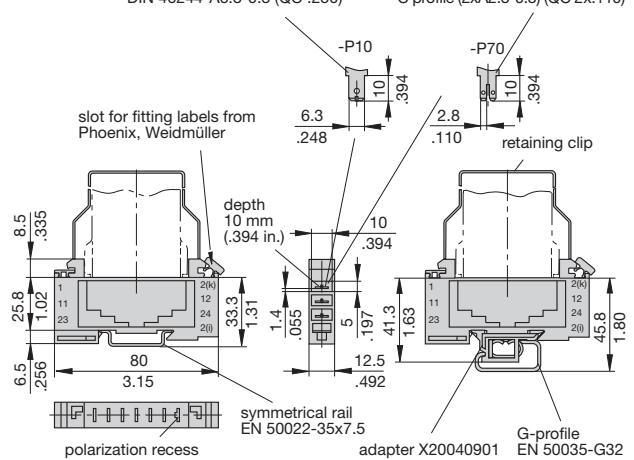


Bus bar 50 A (6-way) for type 17-P10-Si socket X 221 760 01

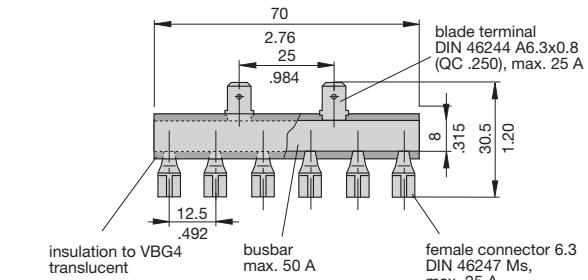


Bus bar (10-way) (supplied as a complete package) for type 17 socket

(for max. 100 A continuous load),
more positions available on request
X 211 157 01 with terminal
X 211 157 02 without terminal

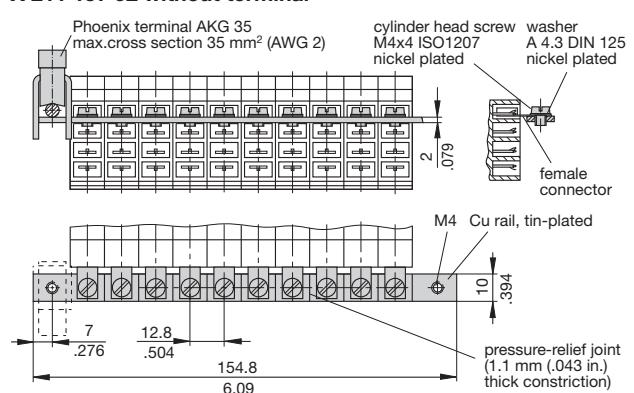

Insulating sleeving for bus bar (10-way) Y 303 824 01

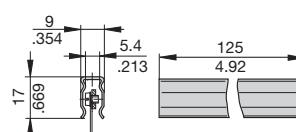


This is a metric design and millimeter dimensions take precedence (mm/inch)


Accessories

Connector bus links -P10

X 210 588 01/ 1.5 mm², (AWG 16), brown (up to 13 A max. load)
 X 210 588 02/ 2.5 mm², (AWG 14), black (up to 20 A max. load)
 X 210 588 03/ 2.5 mm², (AWG 14), red (up to 20 A max. load)
 X 210 588 04/ 2.5 mm², (AWG 14), blue (up to 20 A max. load)

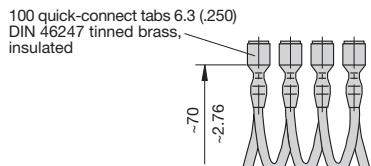


Toggle guard for 1-pole units, black
 X 221 617 01

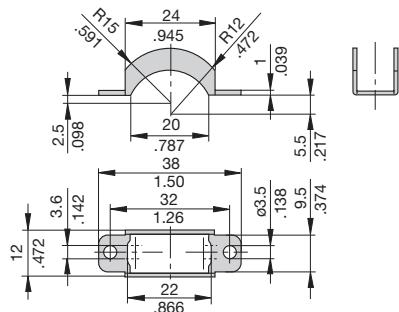

For front panel mounting.


Splash cover (transparent)

with fixing plate and screws (IP54)
for type 2210-S211... (1-pole)
 X 211 117 02

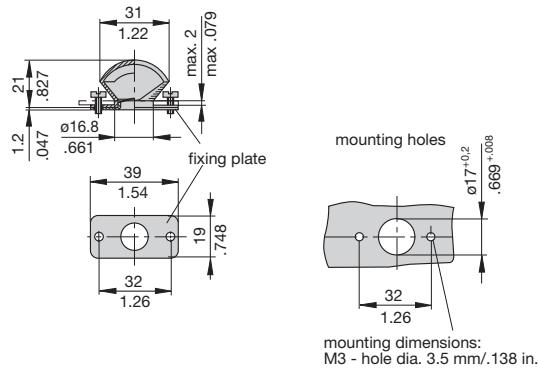

Splash cover (transparent)

with fixing plate and screws (IP54)
for type 2210-S221... (2-pole) and
type 2210-S231... (3-pole)
 X 211 118 01

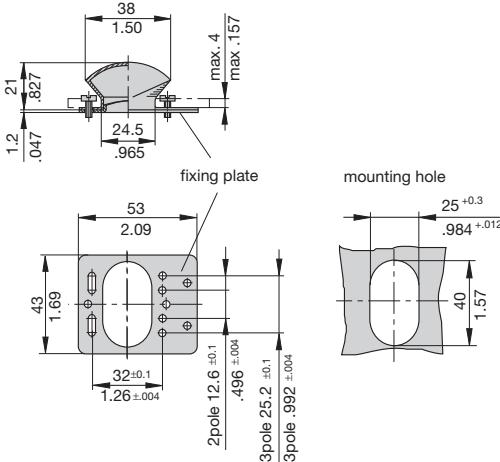

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.