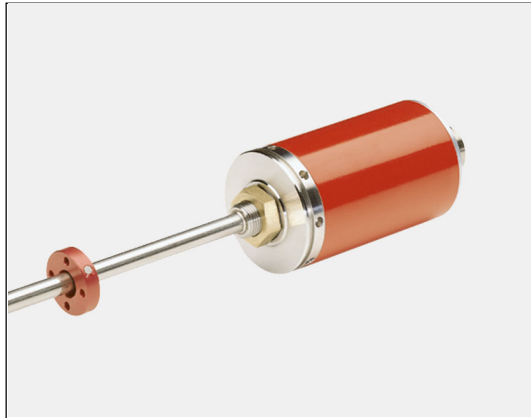



Linear-Encoder LA-66-K ISI

- **High Pressure Type, Makes it Possible for Installation into Hydraulic Cylinders**
- **For Linear Measurement**
- **Non Contact and Wear Free**
- **Programmable and Scaleable**
- **ISI (Incremental Serial Interface)**

7**Electrical Data**

Measurement Principle	Magnetostrictive
Measuring Length (Stroke) Standard (mm).....	150, 300, 500, 700, 750, 1000, 1500, 2000, 2500, 3000
	> 3000 by request
Sensor Capacity	max. 20 Bit
* Resolution	max. 0.01 mm
Operating Voltage	19-27 V DC
Power Dissipation (No Load)	< 5 Watt
Programmable via RS485	IBM PC Compatible EPROG Software, PT-100N Programming Terminal
Inputs	
* Load Input	Request for Encoder Position
* Preset	Adjust absolute position to a given set value (i.e. zero set)
Logic Levels	"0" < +2 VDC, "1" > + 8 VDC, max. 30 VDC
Output Options	Push-Pull (15 mA) or RS422
* Load Output	Verification of Load Request
Channel 1	A
Channel 1 neg.	A neg.
Channel 2	B
Channel 2 neg.	B neg.
Operating Speed	max. 1m/s at a resolution of 0,01 mm
Cycle Time	See Dimensional Drawing
Pin Configuration.....	Upon Request
*Programmable Parameters	

Environmental Data

Electromagnetic compatibility (EMC)	EN 61000-4-2 (IEC-801-2) / EN 61000-4-4 (IEC-801-4)
Operating Temperature	0°-70°C (32° to 158° F) (Optional -20° to +70°C) (-4° to 158° F)
Storage Temperature	-30° to +80°C (-22° to 178° F)
Relative Humidity	98 % (non condensing)
*Protection Class	IP 65 (DIN 40 050)
* The protection class of the sensor can be effected by the type of connector used.	

Mechanical Data

Linearity.....	< 0.05 % of Stroke Length
Repeatability.....	≤ 0.01 mm
Hysteresis.....	< 0.1 mm
Temperature Coefficient	< 5 µm / °C
Vibration (Sinus 50-2000 Hz)	
per DIN IEC 68-2-6.....	≤ 100 m/s ² (10g)
Shock (11ms) per DIN IEC 68-2-27.....	≤ 1000 m/s ² (100g)
Pressure Resistance (Option)	600 bar
Rod Material	Cr/Ni-alloy
Magnetic Field	< 3 mT (milli Tesla)
Operating Speed and Mounting Orientation.....	No restrictions
Magnet Type (Standard).....	T4-M33
Magnet Type(Option).....	T3-U64
Rod Mounting	Option
Mechanical Special Types.....	Upon Request
Connector.....	12 pin Contact Connector

Dimensional Drawing

