
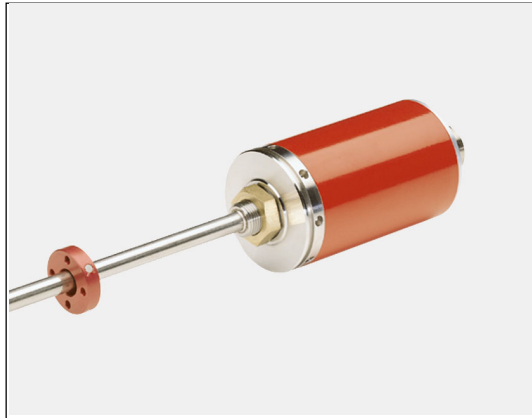


## Linear-Encoder LA-66-K CAM

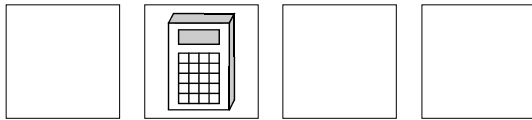

- **High Pressure Type, Makes it Possible for Installation into Hydraulic Cylinders**
- **For Linear Measurement**
- **Non Contact and Wear Free**
- **Programmable and Scaleable**
- **Number of Cams - 8**

### Electrical Data

|  |   |
|--|---|
| Measurement Principle .....                  | Magnetostrictive  |
| Measuring Length (Stroke) Standard (mm)..... | 150, 300, 500, 700, 750, 1000, 1500, 2000, 2500, 3000<br>> 3000 by request        |
| Number of Cams .....                         | 8 Outputs, 1 Cam per output<br>Additional outputs and Cams available upon request |
| * Resolution.....                            | max. 0.01 mm  |
| Operating Voltage .....                      | 19-27 V DC  |
| Power Dissipation (No Load) .....            | < 5 Watt  |
| Programmable via RS485 .....                 | PT-100N Programming Terminal  |
| * Output Code .....                          | Programmable Cams   |
| Output Options .....                         | Push-Pull, Open Collector, Open Emitter (max. 35 V)                               |
| Number of Outputs.....                       | 8 plus Inverted Signals   |
| Maximum Current.....                         | 100 mA / Short Circuit Protected  |
| Inputs                                       |   |
| * Forward / Reverse .....                    | Change count direction  |
| * Preset .....                               | Adjust absolute position to a given value (i.e. zero set)                         |
| Logic Levels .....                           | "0" < + 2 V DC, "1" > + 8 V DC, max. 30 V DC                                      |
| Cycle Time .....                             | See Dimensional Drawing   |
| Pin Configuration.....                       | Upon Request  |
| * Programmable Parameters                    |   |


### Environmental Data

|   |  |
|---|--|
| Electromagnetic compatibility (EMC) .....   | EN 61000-4-2 (IEC-801-2) / EN 61000-4-4 (IEC-801-4)              |
| Operating Temperature .....   | 0°-70°C (32° to 158° F) (Optional -20° to +70°C) (-4° to 158° F) |
| Storage Temperature .....   | -30° to +80°C (-22° to 178° F)                                   |
| Relative Humidity .....   | 98 % (non condensing)  |
| *Protection Class .....   | IP 65 (DIN 40 050)   |
| * The protection class of the sensor can be effected by the type of connector used. |  |

### Mechanical Data

|   |                                |
|---|--------------------------------|
| Linearity.....                                | < 0.05 % of Stroke Length      |
| Repeatability.....                            | ≤ 0.01 mm                      |
| Hysteresis.....                               | < 0.1 mm                       |
| Temperature Coefficient .....                 | < 5 µm / °C                    |
| Vibration (Sinus 50-2000 Hz)                  |                                |
| per DIN IEC 68-2-6.....                       | ≤ 100 m/s <sup>2</sup> (10g)   |
| Shock (11ms) per DIN IEC 68-2-27.....         | ≤ 1000 m/s <sup>2</sup> (100g) |
| Pressure Resistance (Option) .....            | 600 bar                        |
| Rod Material .....                            | Cr/Ni-alloy                    |
| Magnetic Field .....                          | < 3 mT (milli Tesla)           |
| Operating Speed and Mounting Orientation..... | No restrictions                |
| Magnet Type (Standard).....                   | T4-M33                         |
| Magnet Type( Option).....                     | T3-U64                         |
| Rod Mounting .....                            | Option                         |
| Mechanical Special Types.....                 | Upon Request                   |
| Connector .....                               | 26 pin Contact Connector       |


### Dimensional Drawing

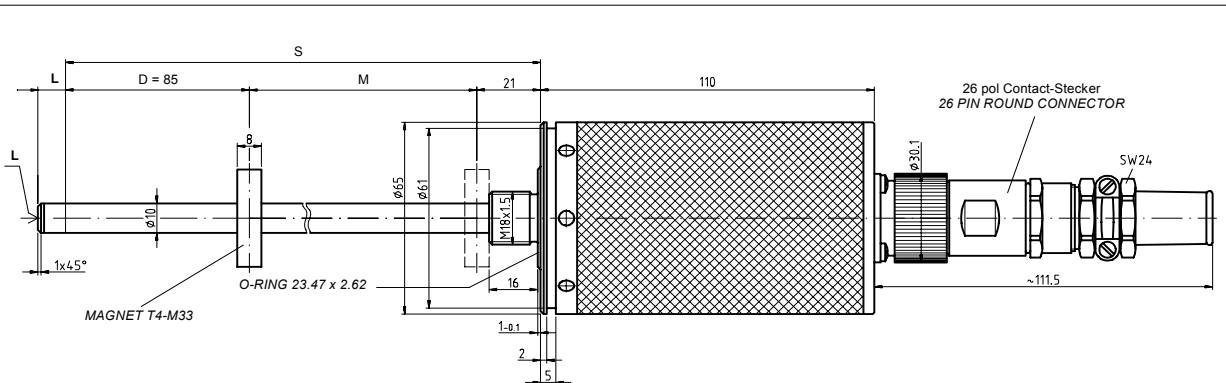

S = Stablänge  
 D = Dämpfungszone: Keine Herstellergarantie für die Meßdaten  
 M = Meßlänge: Typenbezogener Meßweg  
 L = 5 mm Zusatzlänge mit M4x5 bei Option Stabspitzenlagerung

S = TOTAL LENGTH  
 D = DAMPENING ZONE: IN THIS AREA NO MEASURING SIGNAL IS PRODUCED  
 M = STROKE LENGTH  
 L = 5 MM ADDITIONAL LENGTH WITH M4x5 FOR OPTION ROD MOUNTING

MAGNET T4-M33



| Meßlänge M (mm)<br>STROKE LENGTH M (mm) | Stablänge S (mm)<br>TOTAL LENGTH S (MM) | Zykluszeit (ms)<br>CYCLE (ms) |
|---|---|-------------------------------|
| 150                                     | 256                                     | 1,4                           |
| 300                                     | 406                                     | 1,4                           |
| 500                                     | 606                                     | 1,4                           |
| 700                                     | 806                                     | 1,4                           |
| 750                                     | 856                                     | 1,4                           |
| 1000                                    | 1106                                    | 1,8                           |
| 1500                                    | 1606                                    | 2,7                           |
| 2000                                    | 2106                                    | 3,6                           |
| 2500                                    | 2606                                    | 4,5                           |
| 3000                                    | 3106                                    | 5,4                           |